

Type:

Model:

## TEMPEST Integrated LED Downlight

### SPECIFICATIONS

**VOLTAGE:**

120V - 277V. 50/60 Hz

**HOUSING:**

Cast brass with removable 3" shroud. Optional 6" shroud available.

**FINISH:**

Weathered brass. Custom powder coated colors available.

**LENS:**

Tempered glass.

**MOUNTING:**

Threaded with 1/2" NPT. May be mounted into threaded hubs in junction boxes or mounting accessories.

**WIRING:**

Pre-wired with 14" 18 AWG wires.

**WARRANTY:**

10-year warranty




Opt. 6" extended shroud  
5W, 9W & 12W  
#490261



The Tempest downlight features an integrated LED source available in 5, 9, or 12 watts. 2700K and 3000K options. 40-degree beam spread.

### DIMENSIONS:

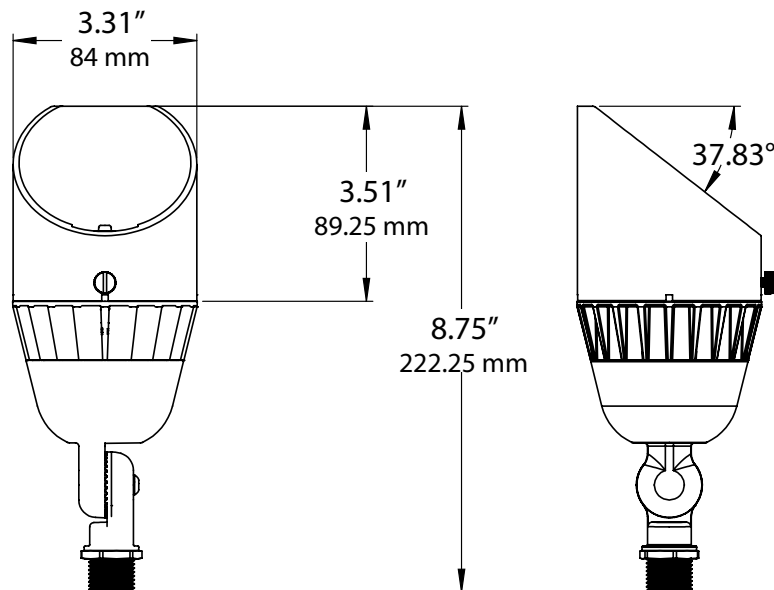

#### LED LAMP SPECIFICATIONS

**LAMP TYPE:**

Integrated LED.

**OPTICS:**

Integral optics providing available beam spread of 40°

**COLOR TEMPERATURES:**

Color temperature options provide the following qualities:  
2700K and 3000K.

#### FIXTURE ORDERING INFORMATION

To order a fixture select the appropriate choice from each column as in the following example:

EXAMPLE: 490280-490261-490039



CODES	WATTAGE	BEAM SPREAD	COLOR TEMP	LUMENS	SHROUD	MOUNTING
490280	5W	40°	2700K	389lm	490260	
490281	9W	40°	2700K	962lm	Extended Shroud 3W/6W	
490282	12W	40°	2700K	1198lm		
490283	5W	40°	3000K	380lm	490261	
490284	9W	40°	3000K	923lm	Extended Shroud	
490285	12W	40°	3000K	1203lm	8W/12W/16W	

