

Type:

Model:

TEMEST Integrated LED Uplight

SPECIFICATIONS

VOLTAGE:

120V - 277V. 50/60 Hz

HOUSING:

Cast brass with removable 3" shroud. Optional 6" shroud available.

FINISH:

Weathered brass. Custom powder coated colors available.

LENS:

Tempered glass.

MOUNTING:

Threaded with 1/2" NPT. May be mounted into threaded hubs in junction boxes or mounting accessories.

WIRING:

Pre-wired with 14" 18 AWG wires.

WARRANTY:


10-year warranty



Opt. 6" extended shroud
5W, 9W & 12W
#490261

The Temest uplight features an integrated LED source available in 5, 9, or 12 watts. 2700K and 3000K options. 40-degree beam spread.

DIMENSIONS:

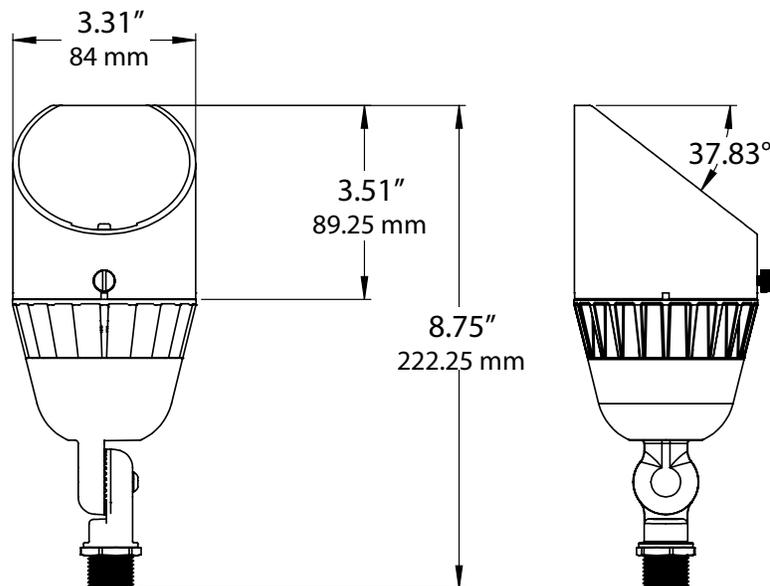

LED LAMP SPECIFICATIONS

LAMP TYPE:

Integrated LED.

OPTICS:

Integral optics providing available beam spread of 40°

COLOR TEMPERATURES:


Color temperature options provide the following qualities:
2700K and 3000K.



FIXTURE ORDERING INFORMATION

To order a fixture select the appropriate choice from each column as in the following example:

EXAMPLE: 490280-490261-490039

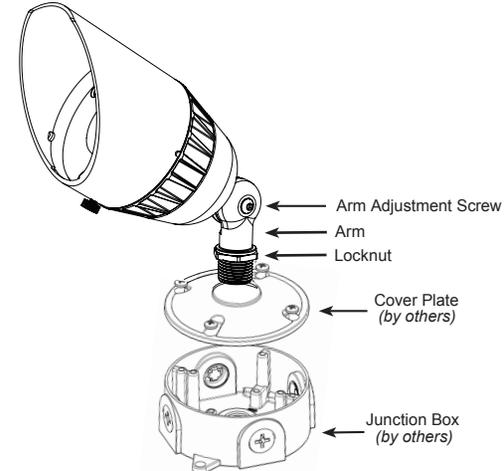CODES	WATTAGE	BEAM SPREAD	COLOR TEMP	LUMENS	SHROUD	RISERS	MOUNTING
490280	5W	40°	2700K	389lm	490260	490038	
490281	9W	40°	2700K	962lm	Extended Shroud	2" brass riser	
490282	12W	40°	2700K	1198lm	3W/6W	490039	
490283	5W	40°	3000K	380lm	490261	3" brass riser	
490284	9W	40°	3000K	923lm	Extended Shroud	490031	
490285	12W	40°	3000K	1203lm	8W/12W/16W	6" brass riser	
						490032	
						12" brass riser	
						490033	
						24" brass riser	