


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:11.59V I:1.488A P:12.88W PF:0.7469 Lamp Flux:235x1 lm		
NAME: 490227 BODACIOUS	TYPE:490227 BODACIOUS	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 85.26 lm/W			
MODEL	490227 BODACIOUS	I _{max} (cd)	12831	S/MH(C0/180)	0.62
NOMINAL POWER(W)	12	LOR(%)	467.3	S/MH(C90/270)	0.88
RATED VOLTAGE(V)	12	TOTAL FLUX(lm)	7008.8	η UP, DN(C0-180)	0.0, 138.6
NOMINAL FLUX(lm)	1500	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.0, 328.6
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	12	η down(%)	467.3	CIBSE SHR MAX	0.65

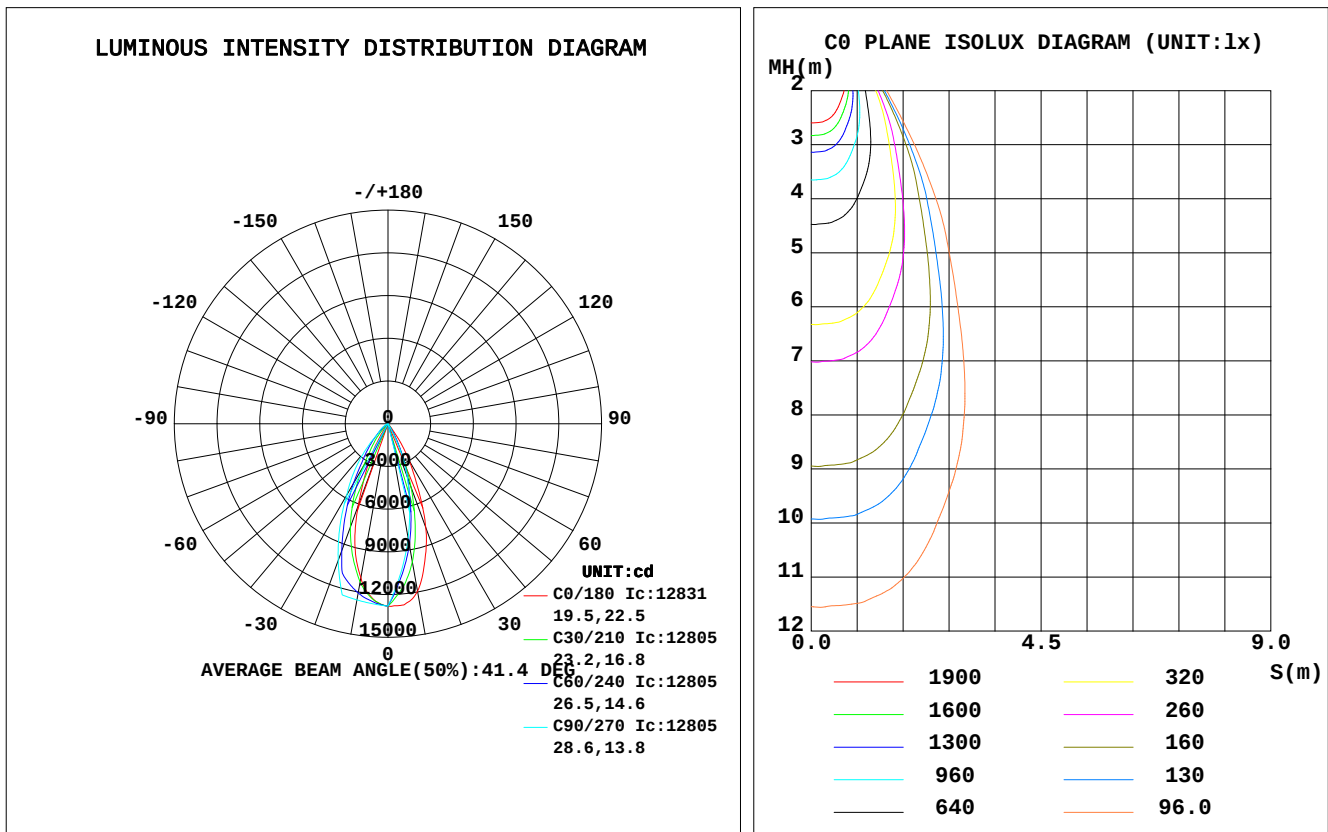

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:Y
Test Date:2025-04-18

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
5	1277	1113	1049	1091	1233	1245	1268	1270	0- 5	292.1	292.1	4.17, 19.5
10	1195	912.2	816.5	865.4	1100	1166	1256	1224	5- 10	801.9	1094	15.6, 72.9
15	1000	667.7	584.5	603.9	895.9	1038	1244	1127	10- 15	1149	2243	32, 150
20	776.0	396.8	394.9	323.2	611.9	896.9	1023	984.4	15- 20	1272	3515	50.1, 234
25	499.4	214.9	295.3	153.6	357.3	666.1	801.4	735.3	20- 25	1152	4667	66.6, 311
30	299.5	93.80	15.77	61.83	171.2	437.1	580.1	503.4	25- 30	882.7	5550	79.2, 370
35	115.7	27.18	10.52	18.83	40.78	252.0	420.6	311.9	30- 35	585.5	6135	87.5, 409
40	22.61	0.6629	5.277	0.4139	11.15	139.5	261.1	177.5	35- 40	371.5	6507	92.8, 434
45	6.812	0.5007	0.0325	0.2831	4.157	86.20	101.6	107.4	40- 45	214.5	6721	95.9, 448
50	3.349	0.3295	0.0361	0.1547	2.030	44.67	76.82	63.00	45- 50	112.7	6834	97.5, 456
55	1.928	0.1491	0.0397	0.0006	1.340	13.73	52.05	30.95	50- 55	71.06	6906	98.5, 460
60	1.405	0.0986	0.0433	0.0107	1.033	7.295	27.29	15.52	55- 60	45.51	6951	99.2, 463
65	1.081	0.0449	0.0731	0.0192	0.7864	3.884	19.51	5.902	60- 65	26.32	6978	99.6, 465
70	0.8339	0.0290	0.1030	0.0357	0.5289	2.368	11.74	2.797	65- 70	16.56	6994	99.8, 466
75	0.5848	0.0653	0.1328	0.0687	0.3013	1.836	3.970	2.098	70- 75	9.578	7004	99.9, 467
80	0.3599	0.0781	0	0.0802	0.1061	1.165	0	1.274	75- 80	4.032	7008	100, 467
85	0.1729	0	0	0	0	0	0	0	80- 85	0.9647	7009	100, 467
90	0.0325	0	0	0	0.0000	0	0	0	85- 90	0.1128	7009	100, 467
95									90- 95			
100									95-100			
105									100-105			
110									105-110			
115									110-115			
120									115-120			
125									120-125			
130									125-130			
135									130-135			
140									135-140			
145									140-145			
150									145-150			
155									150-155			
160									155-160			
165									160-165			
170									165-170			
175									170-175			
180									175-180			
DEG	LUMINOUS INTENSITY:×10cd									UNIT:lm		


C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:Y
Test Date:2025-04-18

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:11.59V I:1.488A P:12.88W PF:0.7469 Lamp Flux:235x1 lm		
NAME: 490227 BODACIOUS	TYPE:490227 BODACIOUS	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

ρ _{CC}	80%			70%			50%			30%			10%			0
ρ _W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	5.56	5.56	5.56	5.43	5.43	5.43	5.19	5.19	5.19	4.97	4.97	4.97	4.77	4.77	4.77	4.67
1.0	5.20	5.09	4.99	5.10	5.00	4.91	4.91	4.83	4.76	4.73	4.67	4.62	4.58	4.53	4.48	4.40
2.0	4.86	4.69	4.54	4.78	4.62	4.49	4.63	4.50	4.39	4.50	4.39	4.30	4.37	4.28	4.21	4.13
3.0	4.56	4.35	4.17	4.50	4.30	4.14	4.38	4.21	4.07	4.27	4.13	4.01	4.16	4.05	3.95	3.88
4.0	4.30	4.06	3.87	4.24	4.02	3.85	4.14	3.95	3.80	4.05	3.89	3.76	3.97	3.83	3.72	3.65
5.0	4.05	3.80	3.61	4.01	3.78	3.60	3.93	3.72	3.57	3.85	3.68	3.54	3.78	3.63	3.51	3.44
6.0	3.84	3.58	3.39	3.80	3.56	3.38	3.73	3.52	3.36	3.67	3.48	3.34	3.61	3.44	3.31	3.25
7.0	3.64	3.38	3.20	3.61	3.36	3.19	3.55	3.33	3.17	3.49	3.30	3.15	3.44	3.27	3.14	3.08
8.0	3.46	3.20	3.02	3.43	3.19	3.02	3.38	3.16	3.00	3.33	3.14	2.99	3.29	3.11	2.98	2.92
9.0	3.29	3.04	2.87	3.27	3.03	2.86	3.23	3.01	2.85	3.19	2.99	2.84	3.15	2.97	2.83	2.77
10.0	3.14	2.89	2.72	3.12	2.88	2.72	3.08	2.86	2.71	3.05	2.85	2.71	3.02	2.83	2.70	2.64

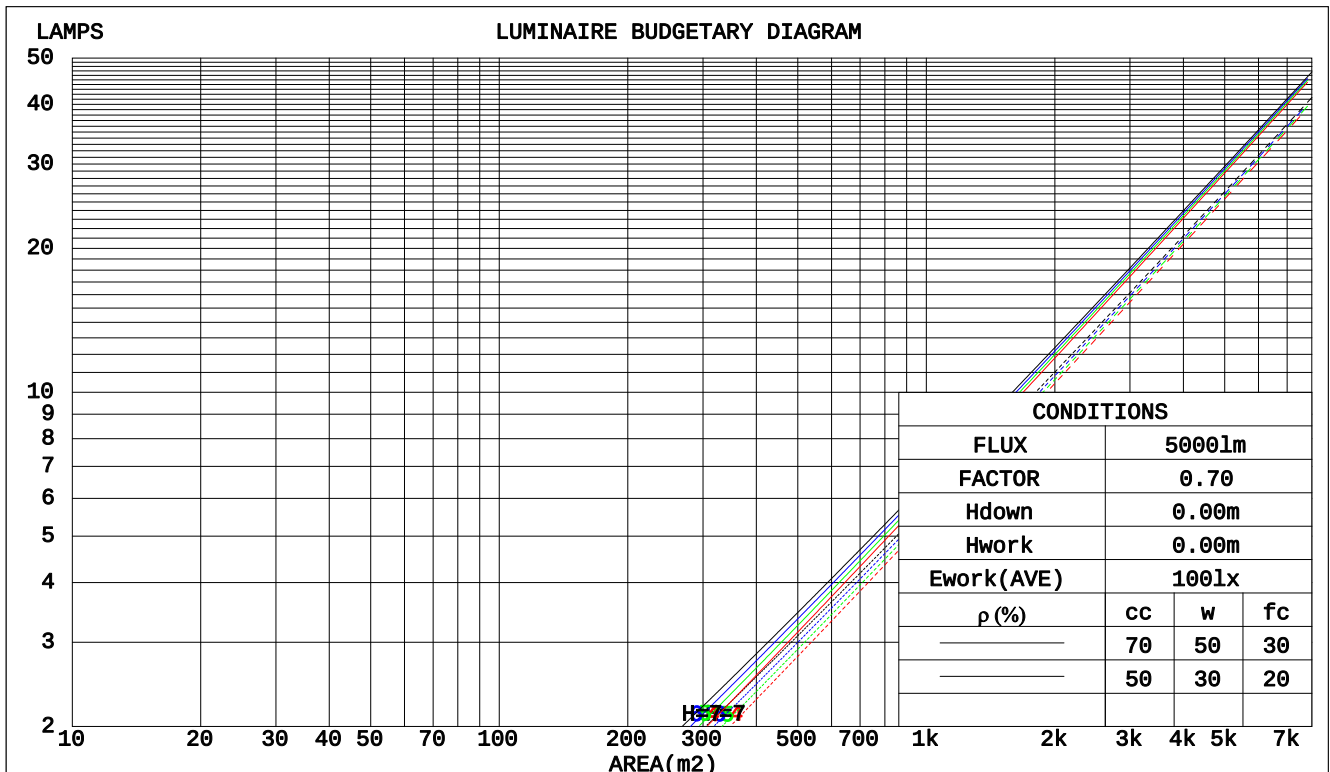

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:Y
Test Date:2025-04-18

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:11.59V I:1.488A P:12.88W PF:0.7469 Lamp Flux:235x1 lm									
NAME: 490227 BODACIOUS					TYPE:490227 BODACIOUS			WEIGHT:	
SPEC.:					DIM.:			SERIAL No.:	
MFR.:					SUR.:			PROTECTION ANGLE:	

ρ _{cc}	80%			70%			50%			30%			10%			0	
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ _{fc}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.789	.449	.142	.758	.432	.137	.699	.401	.128	.645	.372	.119	.596	.345	.111		
2.0	.752	.412	.126	.725	.400	.123	.676	.376	.117	.631	.354	.111	.589	.333	.105		
3.0	.713	.379	.114	.691	.370	.111	.649	.352	.107	.611	.335	.103	.575	.318	.098		
4.0	.677	.352	.103	.658	.344	.102	.622	.330	.098	.589	.316	.095	.558	.303	.092		
5.0	.643	.328	.095	.627	.322	.094	.596	.310	.091	.567	.299	.089	.540	.288	.087		
6.0	.613	.307	.088	.598	.302	.087	.571	.293	.085	.546	.284	.083	.522	.275	.082		
7.0	.585	.289	.082	.572	.285	.081	.548	.277	.080	.526	.269	.078	.504	.262	.077		
8.0	.559	.273	.077	.548	.270	.076	.526	.263	.075	.506	.257	.074	.487	.250	.073		
9.0	.535	.259	.072	.525	.256	.072	.506	.250	.071	.488	.245	.070	.471	.239	.069		
10.0	.513	.246	.068	.504	.244	.068	.487	.239	.067	.471	.234	.066	.456	.229	.066		

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.890	.890	.890	.761	.761	.761	.519	.519	.519	.298	.298	.298	.095	.095	.095	
1.0	.797	.735	.680	.682	.631	.585	.466	.434	.405	.268	.251	.235	.086	.081	.076	
2.0	.723	.619	.532	.619	.533	.460	.425	.369	.321	.245	.215	.188	.079	.069	.061	
3.0	.663	.530	.425	.568	.458	.368	.390	.318	.258	.225	.186	.152	.072	.060	.050	
4.0	.613	.461	.345	.526	.398	.300	.362	.278	.211	.209	.163	.125	.067	.053	.041	
5.0	.570	.406	.285	.490	.351	.248	.337	.245	.175	.195	.144	.104	.063	.047	.034	
6.0	.534	.362	.238	.459	.313	.208	.317	.219	.147	.184	.129	.087	.059	.042	.029	
7.0	.503	.326	.202	.432	.283	.176	.299	.198	.125	.174	.117	.074	.056	.038	.025	
8.0	.475	.296	.173	.409	.257	.151	.283	.180	.107	.165	.106	.064	.053	.035	.021	
9.0	.451	.272	.151	.389	.236	.131	.269	.166	.093	.157	.098	.056	.051	.032	.018	
10.0	.429	.251	.132	.370	.218	.115	.257	.153	.082	.150	.091	.049	.049	.030	.016	

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:Y
Test Date:2025-04-18

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:11.59V I:1.488A P:12.88W PF:0.7469 Lamp Flux:235x1 lm										
NAME: 490227 BODACIOUS					TYPE:490227 BODACIOUS			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.:					SUR.:			PROTECTION ANGLE:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	4.9	5.8	5.2	6.0	6.2	-11.4	-10.5	-11.2	-10.4	-10.2
3H	4.8	5.6	5.0	5.8	6.0	-11.5	-10.7	-11.3	-10.5	-10.3
4H	4.7	5.5	5.0	5.7	5.9	-11.5	-10.8	-11.3	-10.6	-10.3
6H	4.6	5.4	4.9	5.6	5.8	-11.6	-10.9	-11.3	-10.6	-10.4
8H	4.6	5.3	4.9	5.5	5.8	-11.6	-10.9	-11.3	-10.7	-10.4
12H	4.6	5.2	4.9	5.5	5.8	-11.7	-11.0	-11.4	-10.8	-10.5
4H 2H	4.7	5.5	5.0	5.7	5.9	-11.6	-10.9	-11.4	-10.7	-10.4
3H	4.5	5.2	4.8	5.5	5.7	-11.8	-11.1	-11.4	-10.8	-10.6
4H	4.4	5.0	4.8	5.3	5.6	-11.7	-11.1	-11.4	-10.8	-10.5
6H	4.4	4.9	4.7	5.2	5.6	-11.8	-11.2	-11.4	-10.9	-10.6
8H	4.3	4.8	4.7	5.1	5.5	-11.8	-11.3	-11.4	-11.0	-10.6
12H	4.3	4.7	4.7	5.1	5.5	-11.9	-11.4	-11.5	-11.0	-10.7
8H 4H	4.3	4.8	4.7	5.1	5.5	-11.8	-11.3	-11.4	-11.0	-10.6
6H	4.2	4.6	4.6	5.0	5.4	-11.9	-11.4	-11.4	-11.1	-10.6
8H	4.1	4.5	4.6	4.9	5.4	-11.9	-11.5	-11.5	-11.1	-10.7
12H	4.1	4.4	4.6	4.8	5.3	-12.0	-11.7	-11.5	-11.2	-10.7
12H 4H	4.2	4.7	4.6	5.1	5.5	-11.9	-11.4	-11.4	-11.0	-10.6
6H	4.1	4.5	4.6	4.9	5.4	-11.9	-11.5	-11.4	-11.1	-10.7
8H	4.1	4.4	4.6	4.8	5.3	-11.9	-11.6	-11.5	-11.2	-10.7
Variations with the observer position at spacings:										
S = 1.0H	+ 6.6 / -11.6					+ 5.1 / - 8.8				
1.5H	+ 9.3 / -14.2					+ 7.8 / - 9.1				
2.0H	+ 7.6 / - 8.7					+ 0.7 / - 0.9				

CIE Pub.117 Corrected 1500 lm Total Lamp Luminous Flux.(8log(F/F0) = 1.4)

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:Y
Test Date:2025-04-18

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:11.59V I:1.488A P:12.88W PF:0.7469 Lamp Flux:235x1 lm		
NAME: 490227 BODACIOUS	TYPE:490227 BODACIOUS	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	407	377	359	404	376	358	401	374	358	341
0.80	442	414	397	439	413	396	433	410	394	377
1.00	463	437	420	459	435	418	452	434	416	397
1.25	482	457	441	477	455	439	468	449	436	416
1.50	495	472	457	489	469	454	478	462	449	429
2.00	507	488	473	501	483	469	488	474	462	438
2.50	515	497	483	507	491	479	493	480	470	443
3.00	522	506	494	514	500	489	498	487	478	449
4.00	532	519	509	522	511	502	505	497	489	456
5.00	537	527	518	528	518	511	509	502	496	461
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:Y
Test Date:2025-04-18

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 γ Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:11.59V I:1.488A P:12.88W PF:0.7469 Lamp Flux:235x1 lm		
NAME: 490227 BODACIOUS	TYPE:490227 BODACIOUS	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

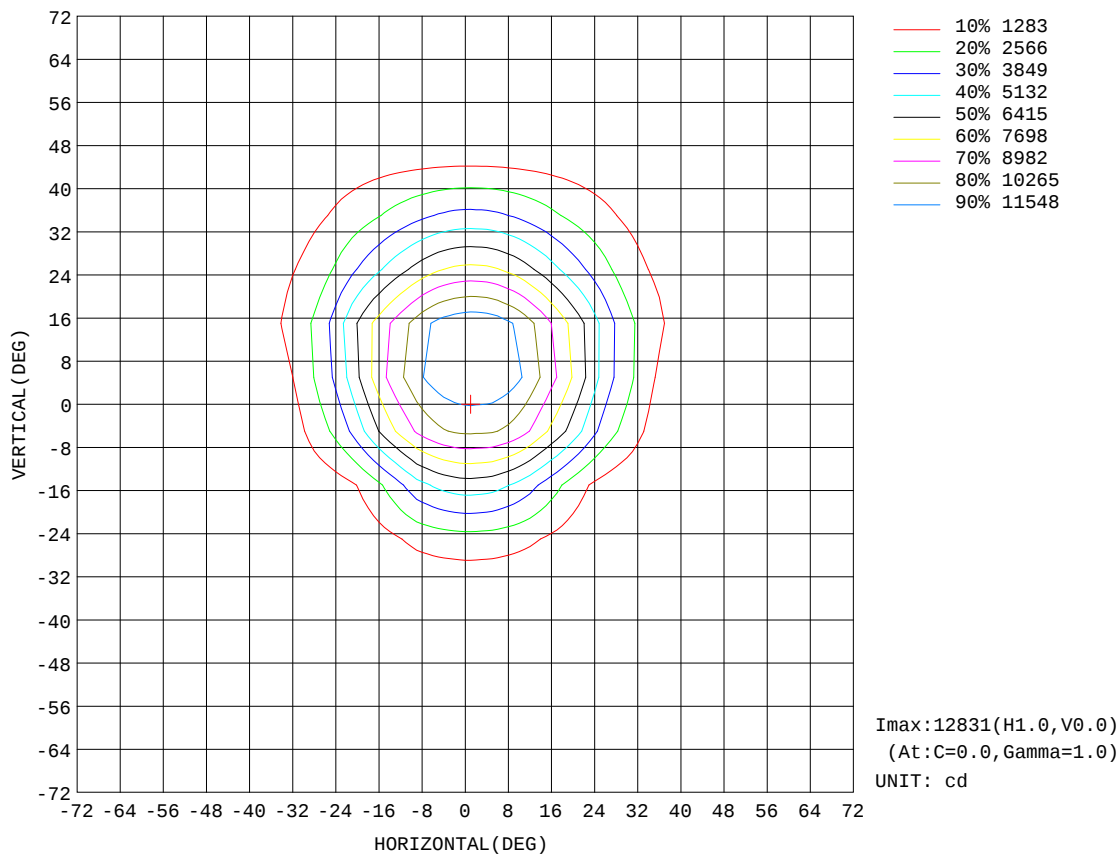


C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:Y
Test Date:2025-04-18

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

AAI CURVES

Test:U:11.59V I:1.488A P:12.88W PF:0.7469 Lamp Flux:235x1 lm		
NAME: 490227 BODACIOUS	TYPE:490227 BODACIOUS	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

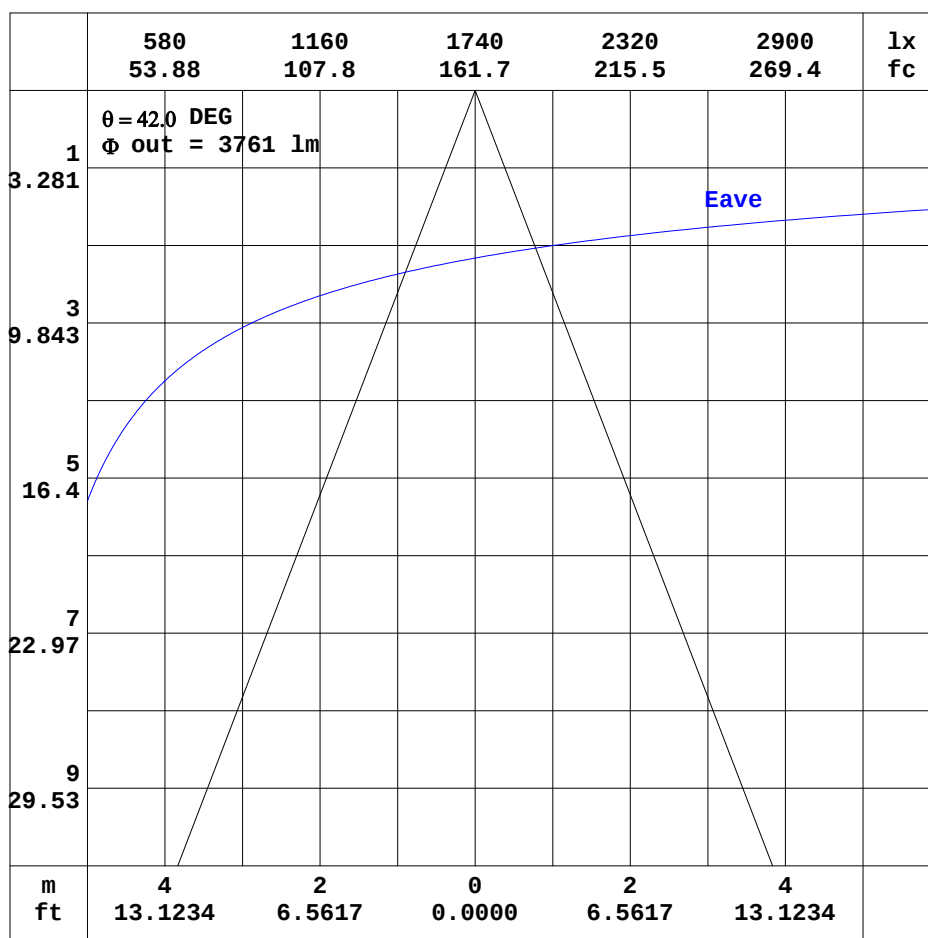


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature: 20DEG
 Operators: Y
 Test Date: 2025-04-18

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.291
 Humidity: 65.0%
 Test Distance: 8.750m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:11.59V I:1.488A P:12.88W PF:0.7469 Lamp Flux:235x1 lm		
NAME: 490227 BODACIOUS	TYPE:490227 BODACIOUS	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

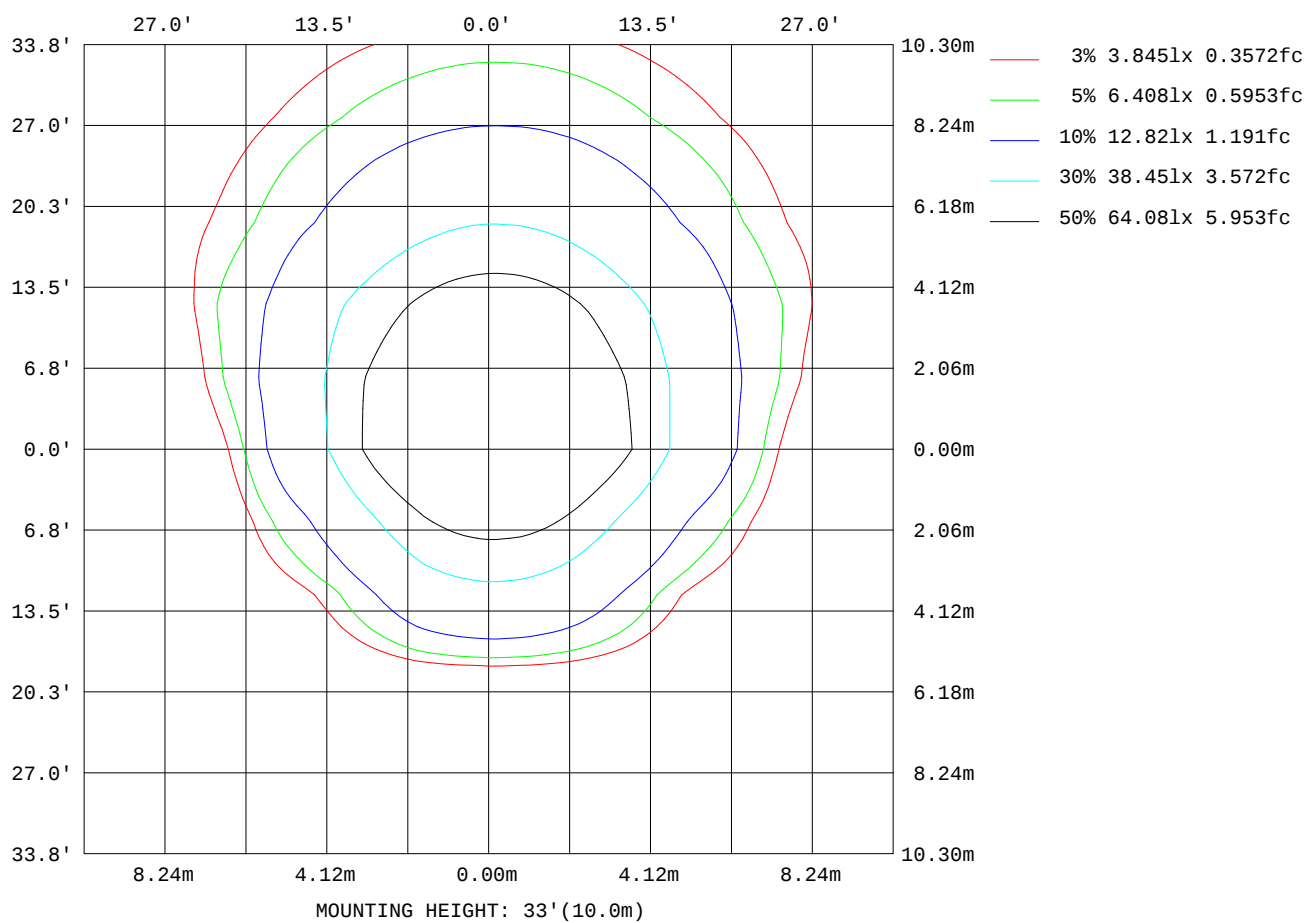

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:Y
Test Date:2025-04-18

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:11.59V I:1.488A P:12.88W PF:0.7469 Lamp Flux:235x1 lm		
NAME: 490227 BODACIOUS	TYPE:490227 BODACIOUS	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:


AvgL	cd/m2
L_0~180(65)av	110
L_0~180(75)av	86
L_0~180(85)av	50
L_90~270(65)av	1159
L_90~270(75)av	396
L_90~270(85)av	0
L_45(65)av	291
L_45(75)av	196
L_45(85)av	0

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:Y
Test Date:2025-04-18

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

Planar Illuminance Curve

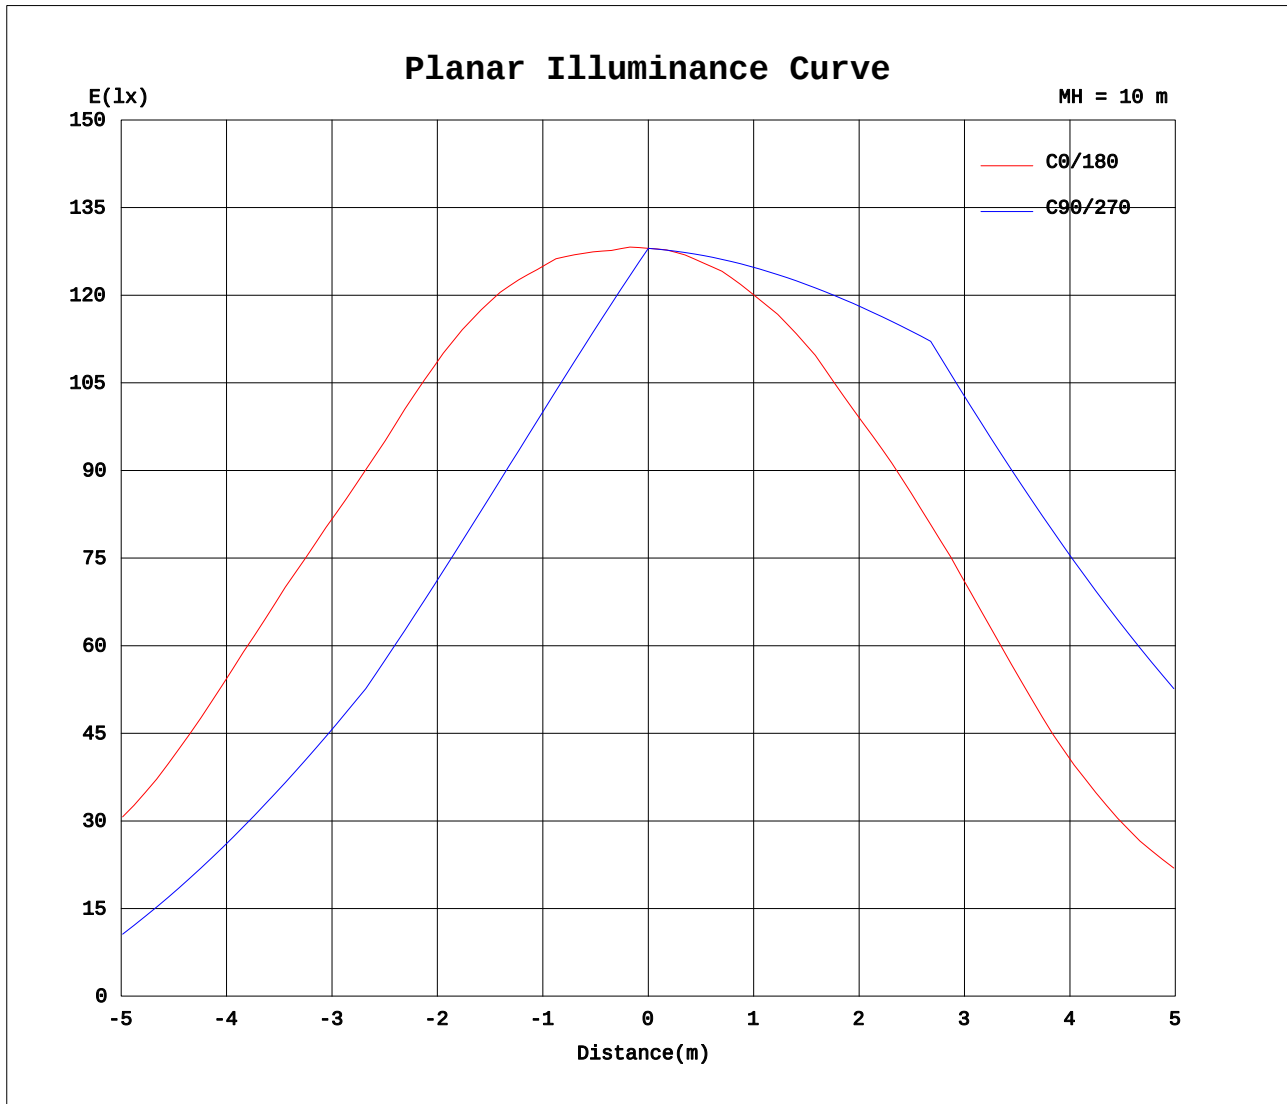

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: Y
Test Date: 2025-04-18

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.291
Humidity: 65.0%
Test Distance: 8.750m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:11.59V I:1.488A P:12.88W PF:0.7469 Lamp Flux:235x1 lm		
NAME: 490227 BODACIOUS	TYPE:490227 BODACIOUS	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

Table- -1

UNIT: $\times 10 \text{cd}$ [illegible]

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: Y
Test Date: 2025-04-18

```

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

```

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:11.59V I:1.488A P:12.88W PF:0.7469 Lamp Flux:235x1 lm		
NAME: 490227 BODACIOUS	TYPE:490227 BODACIOUS	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

Table - -2

UNIT: $\times 10 \text{cd}$ [illegible]

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: Y
Test Date: 2025-04-18

```

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

```

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:11.59V I:1.488A P:12.88W PF:0.7469 Lamp Flux:235x1 lm		
NAME: 490227 BODACIOUS	TYPE:490227 BODACIOUS	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

Table - - 3

UNIT: $\times 10 \text{cd}$ [illegible]

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: Y
Test Date: 2025-04-18

```

Range: 0 - 90DEG
Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

```

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:11.59V I:1.488A P:12.88W PF:0.7469 Lamp Flux:235x1 lm		
NAME: 490227 BODACIOUS	TYPE:490227 BODACIOUS	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

UNIT: $\times 10 \text{cd}$ [illegible]

```

Range: 0 - 90DEG
Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

```