


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.1V I:0.0767A P:8.989W PF:0.9760 Lamp Flux:235x1 lm		
NAME: 490281 TEMPEST	TYPE:490281 TEMPEST	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 100.53 lm/W			
MODEL	490281 TEMPEST	I _{max} (cd)	10540	S/MH(C0/180)	0.63
NOMINAL POWER(W)	9	LOR(%)	384.5	S/MH(C90/270)	0.84
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	5768.1	η UP, DN(C0-180)	0.0, 120.1
NOMINAL FLUX(lm)	1500	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.0, 264.4
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	120	η down(%)	384.5	CIBSE SHR MAX	0.65

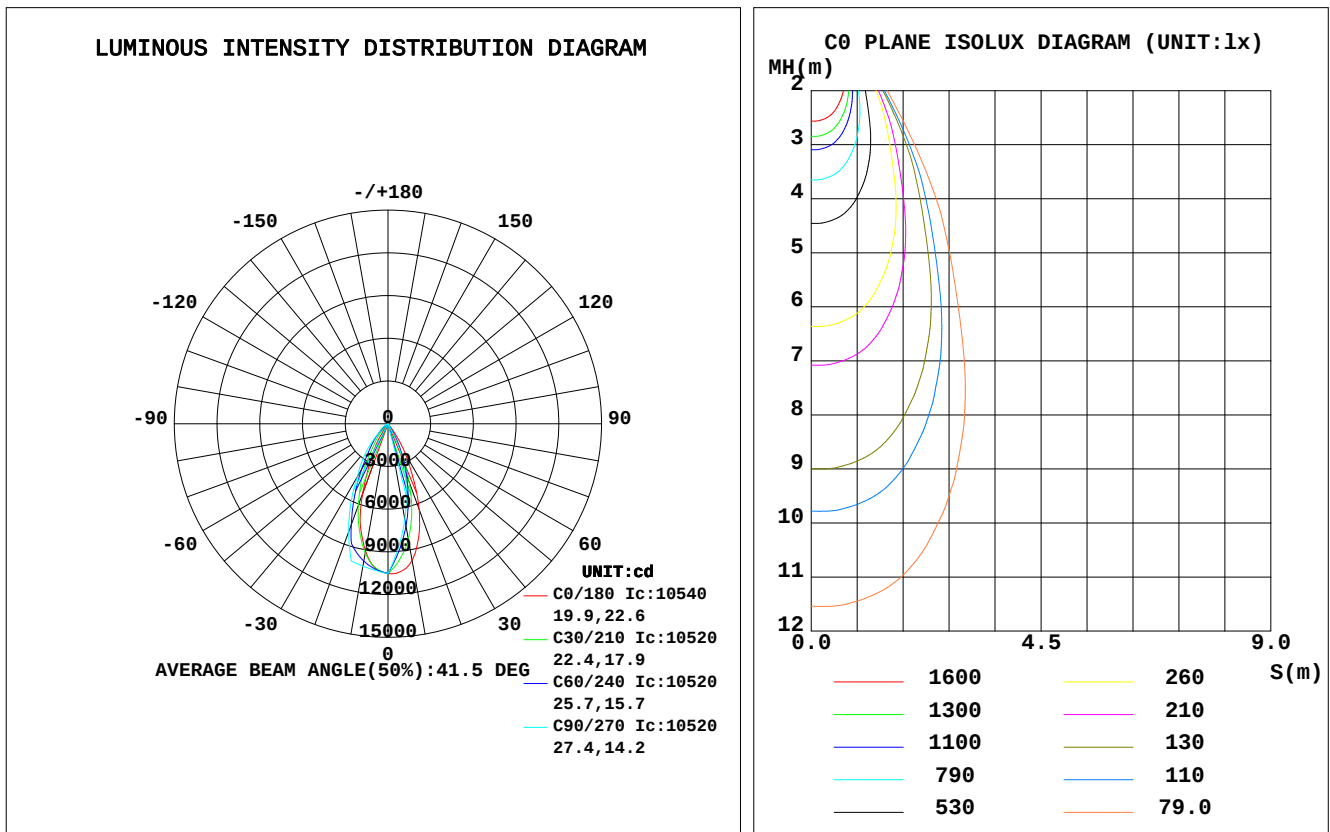

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: Y
Test Date: 2025-04-21

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.291
Humidity: 65.0%
Test Distance: 8.750m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	φ zone	φ total	%lum, lamp
5	1041	921.7	867.4	900.4	1018	1019	1034	1036	0- 5	240.0	240.0	4.16,16
10	974.1	769.2	682.7	717.4	907.1	949.3	1016	989.9	5- 10	658.1	898.1	15.6,59.9
15	831.9	591.4	498.1	516.8	748.6	837.6	997.5	905.9	10- 15	946.3	1844	32,123
20	641.3	401.0	338.9	302.9	522.7	704.3	808.0	797.3	15- 20	1056	2900	50.3,193
25	414.6	226.0	179.7	147.8	304.0	508.1	618.5	604.8	20- 25	954.8	3855	66.8,257
30	245.5	97.71	20.47	59.15	157.4	337.8	428.9	415.3	25- 30	723.4	4579	79.4,305
35	96.70	26.13	13.65	17.03	35.84	201.4	315.8	256.5	30- 35	472.3	5051	87.6,337
40	21.29	0.6052	6.837	0.4466	9.080	109.7	202.6	146.9	35- 40	298.6	5349	92.7,357
45	5.905	0.3929	0.0217	0.2895	3.364	67.00	89.49	89.96	40- 45	176.7	5526	95.8,368
50	2.765	0.2424	0.0244	0.1640	1.721	36.55	67.20	53.91	45- 50	96.41	5623	97.5,375
55	1.641	0.1001	0.0271	0.0102	1.204	13.49	44.91	23.64	50- 55	61.13	5684	98.5,379
60	1.183	0.0627	0.0297	0.0031	0.9217	6.166	22.62	9.448	55- 60	37.77	5721	99.2,381
65	0.9073	0.0242	0.0514	0.0081	0.7078	3.048	16.18	3.834	60- 65	21.26	5743	99.6,383
70	0.6795	0.0137	0.0731	0.0174	0.4909	1.820	9.747	2.226	65- 70	13.42	5756	99.8,384
75	0.4521	0.0395	0.0948	0.0455	0.2904	1.435	3.311	1.735	70- 75	7.793	5764	99.9,384
80	0.2489	0.0499	0	0.0564	0.1249	0.9319	0	1.104	75- 80	3.299	5767	100,384
85	0.0809	0	0	0	0.0002	0	0	0	80- 85	0.7955	5768	100,385
90	0	0	0	0	0	0	0	0	85- 90	0.0814	5768	100,385
95									90- 95			
100									95-100			
105									100-105			
110									105-110			
115									110-115			
120									115-120			
125									120-125			
130									125-130			
135									130-135			
140									135-140			
145									140-145			
150									145-150			
155									150-155			
160									155-160			
165									160-165			
170									165-170			
175									170-175			
180									175-180			
DEG	LUMINOUS INTENSITY:×10cd									UNIT:lm		


C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:Y
Test Date:2025-04-21

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.1V I:0.0767A P:8.989W PF:0.9760 Lamp Flux:235x1 lm		
NAME: 490281 TEMPEST	TYPE:490281 TEMPEST	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

ρ _{CC}	80%			70%			50%			30%			10%			0
ρ _W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	4.58	4.58	4.58	4.47	4.47	4.47	4.27	4.27	4.27	4.09	4.09	4.09	3.92	3.92	3.92	3.85
1.0	4.28	4.19	4.11	4.19	4.11	4.04	4.04	3.98	3.92	3.90	3.85	3.80	3.77	3.73	3.69	3.62
2.0	4.00	3.86	3.73	3.94	3.80	3.69	3.81	3.71	3.61	3.70	3.61	3.54	3.60	3.52	3.46	3.40
3.0	3.76	3.58	3.44	3.70	3.54	3.41	3.60	3.47	3.35	3.51	3.40	3.30	3.43	3.33	3.25	3.19
4.0	3.54	3.34	3.19	3.49	3.31	3.17	3.41	3.26	3.13	3.34	3.20	3.10	3.27	3.15	3.06	3.00
5.0	3.34	3.13	2.98	3.30	3.11	2.96	3.23	3.07	2.94	3.17	3.03	2.91	3.11	2.99	2.89	2.83
6.0	3.16	2.94	2.79	3.13	2.93	2.78	3.07	2.90	2.76	3.02	2.86	2.75	2.97	2.83	2.73	2.68
7.0	2.99	2.78	2.63	2.97	2.77	2.62	2.92	2.74	2.61	2.88	2.72	2.60	2.84	2.69	2.58	2.53
8.0	2.85	2.63	2.49	2.82	2.62	2.48	2.78	2.60	2.47	2.75	2.58	2.46	2.71	2.56	2.45	2.40
9.0	2.71	2.50	2.36	2.69	2.49	2.36	2.66	2.47	2.35	2.62	2.46	2.34	2.59	2.44	2.33	2.29
10.0	2.58	2.38	2.24	2.57	2.37	2.24	2.54	2.36	2.23	2.51	2.35	2.23	2.48	2.33	2.22	2.18

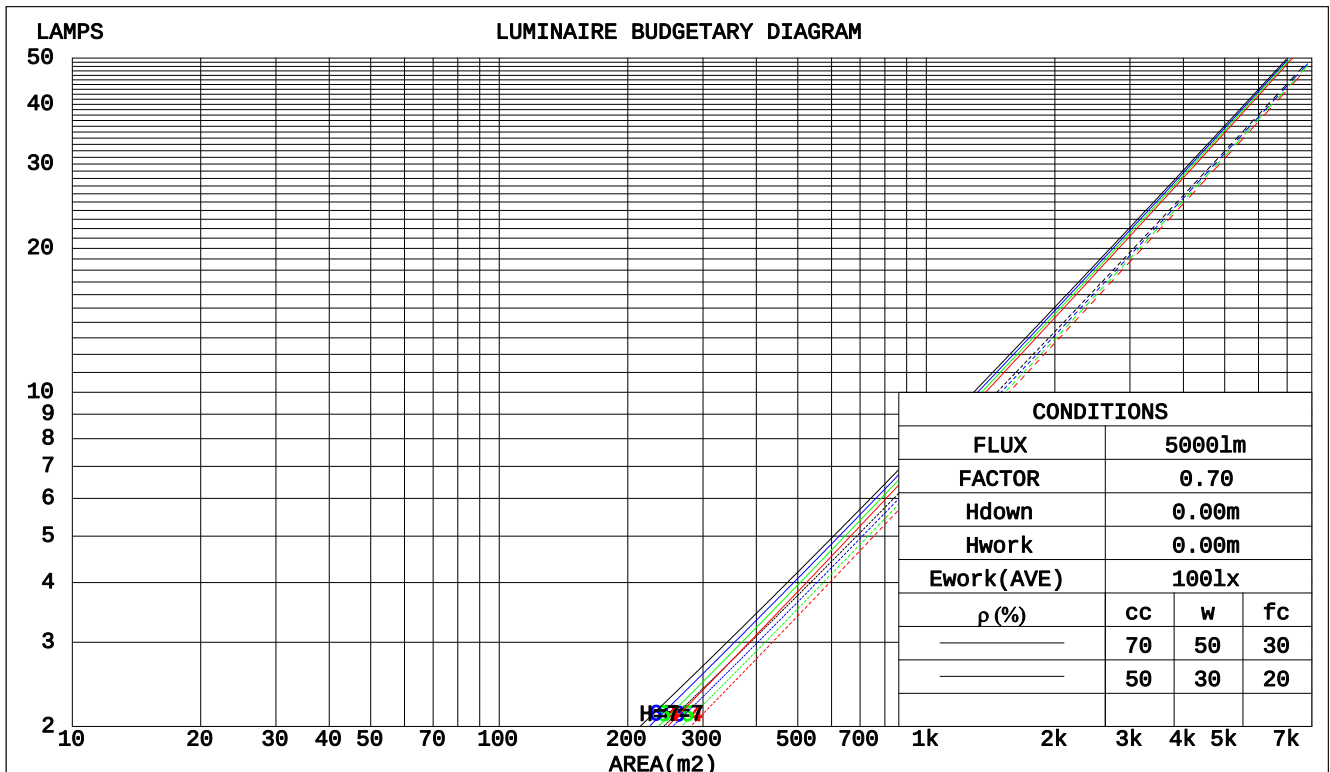

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:Y
Test Date:2025-04-21

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.1V I:0.0767A P:8.989W PF:0.9760 Lamp Flux:235x1 lm								
NAME: 490281 TEMPEST				TYPE:490281 TEMPEST			WEIGHT:	
SPEC.:				DIM.:			SERIAL No.:	
MFR.:				SUR.:			PROTECTION ANGLE:	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.649	.369	.117	.624	.356	.113	.575	.330	.105	.531	.306	.098	.490	.284	.092	
2.0	.618	.339	.104	.597	.329	.101	.556	.309	.096	.519	.291	.091	.485	.274	.086	
3.0	.587	.312	.093	.568	.304	.092	.534	.289	.088	.502	.275	.084	.473	.262	.081	
4.0	.557	.289	.085	.541	.283	.084	.512	.271	.081	.484	.260	.078	.459	.249	.076	
5.0	.529	.270	.078	.516	.265	.077	.490	.255	.075	.466	.246	.073	.444	.237	.071	
6.0	.504	.253	.072	.492	.249	.072	.470	.241	.070	.449	.233	.069	.429	.226	.067	
7.0	.481	.238	.067	.471	.234	.067	.451	.228	.066	.432	.222	.064	.415	.216	.063	
8.0	.460	.225	.063	.451	.222	.063	.433	.216	.062	.416	.211	.061	.401	.206	.060	
9.0	.440	.213	.059	.432	.211	.059	.416	.206	.058	.402	.201	.058	.388	.197	.057	
10.0	.422	.202	.056	.415	.200	.056	.401	.196	.055	.387	.192	.055	.375	.189	.054	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Ceiling Cavity Exitance Coefficients(CCEC)												
0.0	.732	.732	.732	.626	.626	.626	.427	.427	.427	.245	.245	.245	.078	.078	.078	
1.0	.656	.605	.560	.561	.519	.482	.384	.357	.333	.221	.207	.194	.071	.067	.063	
2.0	.595	.510	.438	.510	.439	.378	.349	.304	.264	.201	.177	.155	.065	.057	.050	
3.0	.545	.436	.350	.468	.377	.303	.321	.262	.213	.185	.153	.125	.060	.050	.041	
4.0	.504	.379	.284	.433	.328	.247	.298	.228	.174	.172	.134	.103	.055	.044	.034	
5.0	.469	.334	.234	.403	.289	.204	.278	.202	.144	.161	.119	.085	.052	.039	.028	
6.0	.439	.298	.196	.378	.258	.171	.261	.181	.121	.151	.106	.072	.049	.035	.024	
7.0	.414	.268	.166	.356	.233	.145	.246	.163	.103	.143	.096	.061	.046	.031	.020	
8.0	.391	.244	.143	.337	.212	.124	.233	.149	.088	.136	.088	.053	.044	.029	.017	
9.0	.371	.224	.124	.320	.194	.108	.221	.136	.077	.129	.081	.046	.042	.026	.015	
10.0	.353	.206	.109	.304	.179	.095	.211	.126	.067	.123	.075	.040	.040	.024	.013	

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:Y
Test Date:2025-04-21

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.1V I:0.0767A P:8.989W PF:0.9760 Lamp Flux:235x1 lm										
NAME: 490281 TEMPEST					TYPE:490281 TEMPEST			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.:					SUR.:			PROTECTION ANGLE:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	4.6	5.5	4.8	5.6	5.8	-8.3	-7.4	-8.1	-7.2	-7.1
3H	4.4	5.2	4.7	5.4	5.6	-8.4	-7.6	-8.2	-7.4	-7.2
4H	4.3	5.1	4.6	5.3	5.6	-8.5	-7.7	-8.2	-7.5	-7.3
6H	4.3	5.0	4.6	5.2	5.5	-8.6	-7.9	-8.3	-7.6	-7.4
8H	4.2	4.9	4.5	5.2	5.4	-8.6	-7.9	-8.3	-7.7	-7.4
12H	4.2	4.8	4.5	5.1	5.4	-8.7	-8.0	-8.4	-7.7	-7.5
4H 2H	4.3	5.1	4.6	5.3	5.5	-8.5	-7.8	-8.3	-7.5	-7.3
3H	4.2	4.8	4.5	5.1	5.4	-8.7	-8.0	-8.4	-7.8	-7.5
4H	4.1	4.7	4.4	5.0	5.3	-8.8	-8.2	-8.4	-7.9	-7.6
6H	4.0	4.5	4.4	4.8	5.2	-8.8	-8.3	-8.5	-8.0	-7.6
8H	3.9	4.4	4.3	4.8	5.1	-8.9	-8.4	-8.5	-8.1	-7.7
12H	3.9	4.3	4.3	4.7	5.1	-8.9	-8.5	-8.5	-8.1	-7.7
8H 4H	3.9	4.4	4.3	4.8	5.1	-8.9	-8.4	-8.5	-8.1	-7.7
6H	3.8	4.2	4.3	4.6	5.0	-9.0	-8.6	-8.6	-8.2	-7.8
8H	3.8	4.1	4.2	4.5	5.0	-9.0	-8.7	-8.6	-8.3	-7.8
12H	3.7	4.0	4.2	4.5	4.9	-9.1	-8.8	-8.6	-8.4	-7.9
12H 4H	3.9	4.3	4.3	4.7	5.1	-8.9	-8.5	-8.5	-8.1	-7.7
6H	3.8	4.1	4.2	4.5	5.0	-9.0	-8.7	-8.6	-8.3	-7.8
8H	3.7	4.0	4.2	4.5	4.9	-9.1	-8.8	-8.6	-8.3	-7.9
Variations with the observer position at spacings:										
S = 1.0H	+ 6.6 / -13.2					+ 5.0 / -13.6				
1.5H	+ 9.3 / -16.7					+ 7.8 / -13.9				
2.0H	+ 8.1 / -12.8					+ 0.7 / - 0.9				

CIE Pub.117 Corrected 1500 lm Total Lamp Luminous Flux.(8log(F/F0) = 1.4)

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:Y
Test Date:2025-04-21

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.1V I:0.0767A P:8.989W PF:0.9760 Lamp Flux:235x1 lm		
NAME: 490281 TEMPEST	TYPE:490281 TEMPEST	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	334	310	295	332	309	295	329	308	294	280
0.80	363	341	326	361	339	326	356	337	324	310
1.00	381	359	345	378	357	344	371	357	342	327
1.25	396	376	363	392	374	361	385	370	358	342
1.50	407	389	376	402	386	374	394	380	370	353
2.00	417	401	389	412	397	386	401	390	380	360
2.50	424	409	398	418	404	394	406	395	387	364
3.00	430	417	406	423	411	402	410	401	394	369
4.00	438	427	418	430	421	413	416	409	403	375
5.00	442	434	427	434	427	420	419	413	408	379
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:20DEG
 Operators:Y
 Test Date:2025-04-21

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.291
 Humidity:65.0%
 Test Distance:8.750m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.1V I:0.0767A P:8.989W PF:0.9760 Lamp Flux:235x1 lm		
NAME: 490281 TEMPEST	TYPE:490281 TEMPEST	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

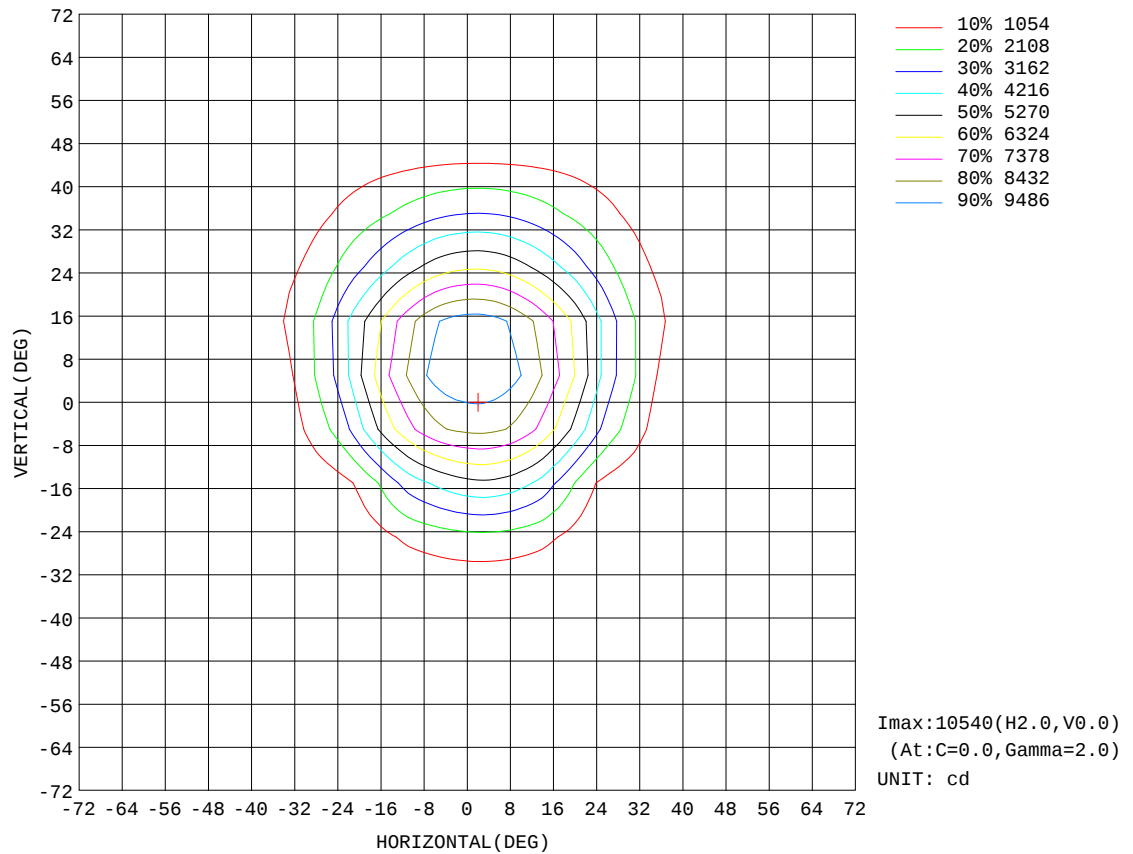


C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:Y
Test Date:2025-04-21

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.1V I:0.0767A P:8.989W PF:0.9760 Lamp Flux:235x1 lm		
NAME: 490281 TEMPEST	TYPE:490281 TEMPEST	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

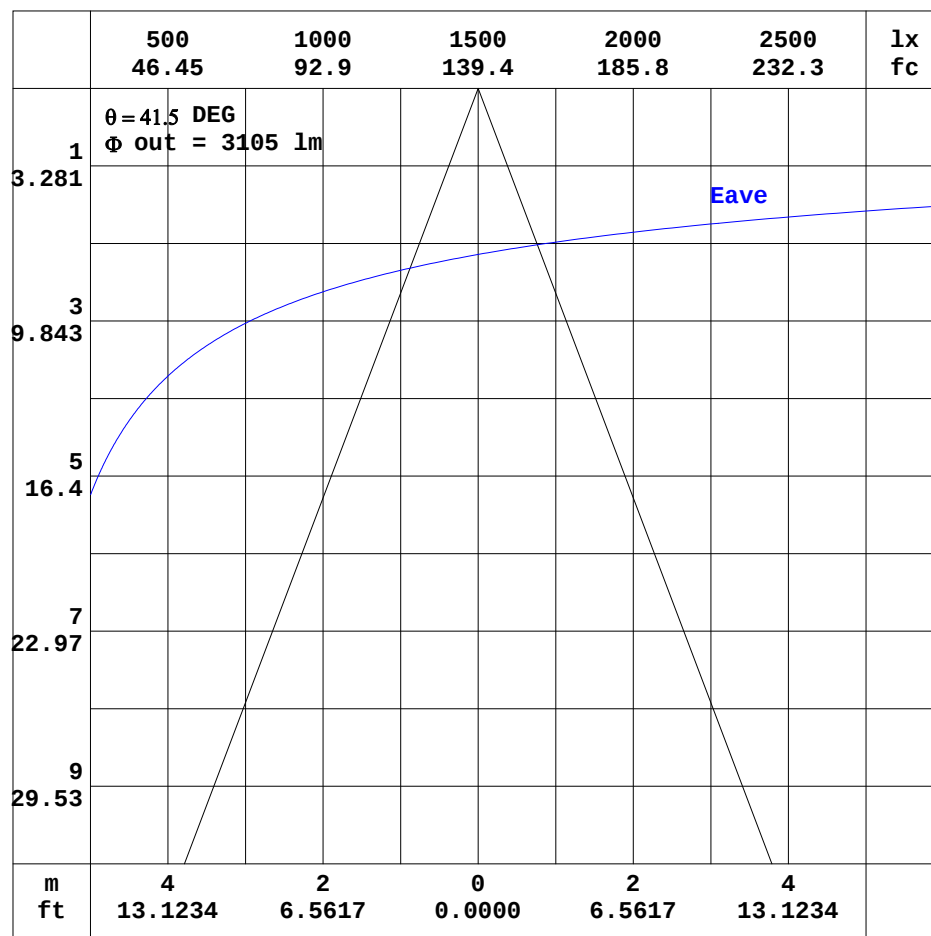


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:Y
Test Date:2025-04-21

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.1V I:0.0767A P:8.989W PF:0.9760 Lamp Flux:235x1 lm		
NAME: 490281 TEMPEST	TYPE:490281 TEMPEST	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

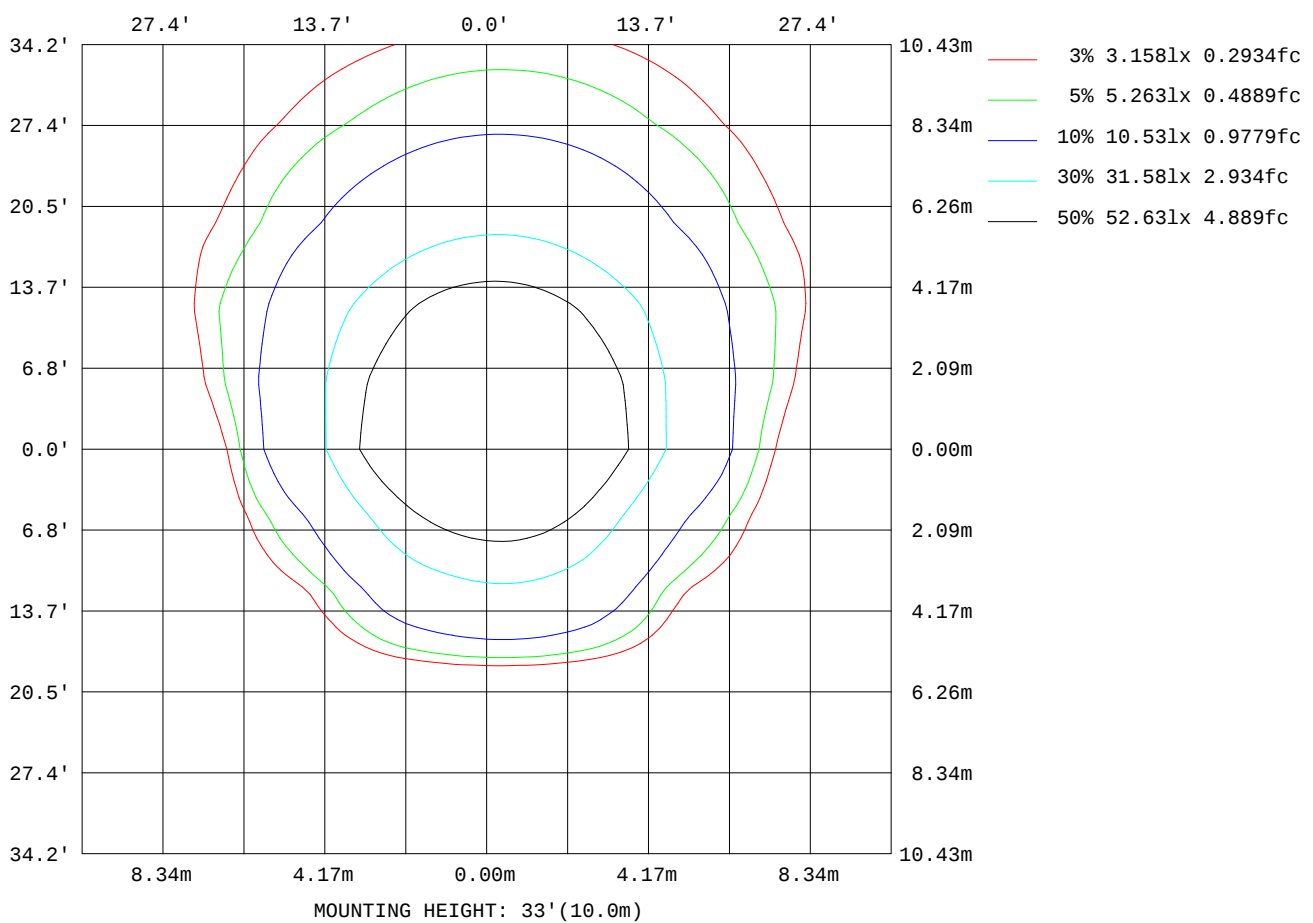

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:Y
Test Date:2025-04-21

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.1V I:0.0767A P:8.989W PF:0.9760 Lamp Flux:235x1 lm		
NAME: 490281 TEMPEST	TYPE:490281 TEMPEST	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:


AvgL	cd/m2
L_0~180(65)av	96
L_0~180(75)av	72
L_0~180(85)av	23
L_90~270(65)av	960
L_90~270(75)av	329
L_90~270(85)av	0
L_45(65)av	205
L_45(75)av	157
L_45(85)av	0

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:Y
Test Date:2025-04-21

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

Planar Illuminance Curve

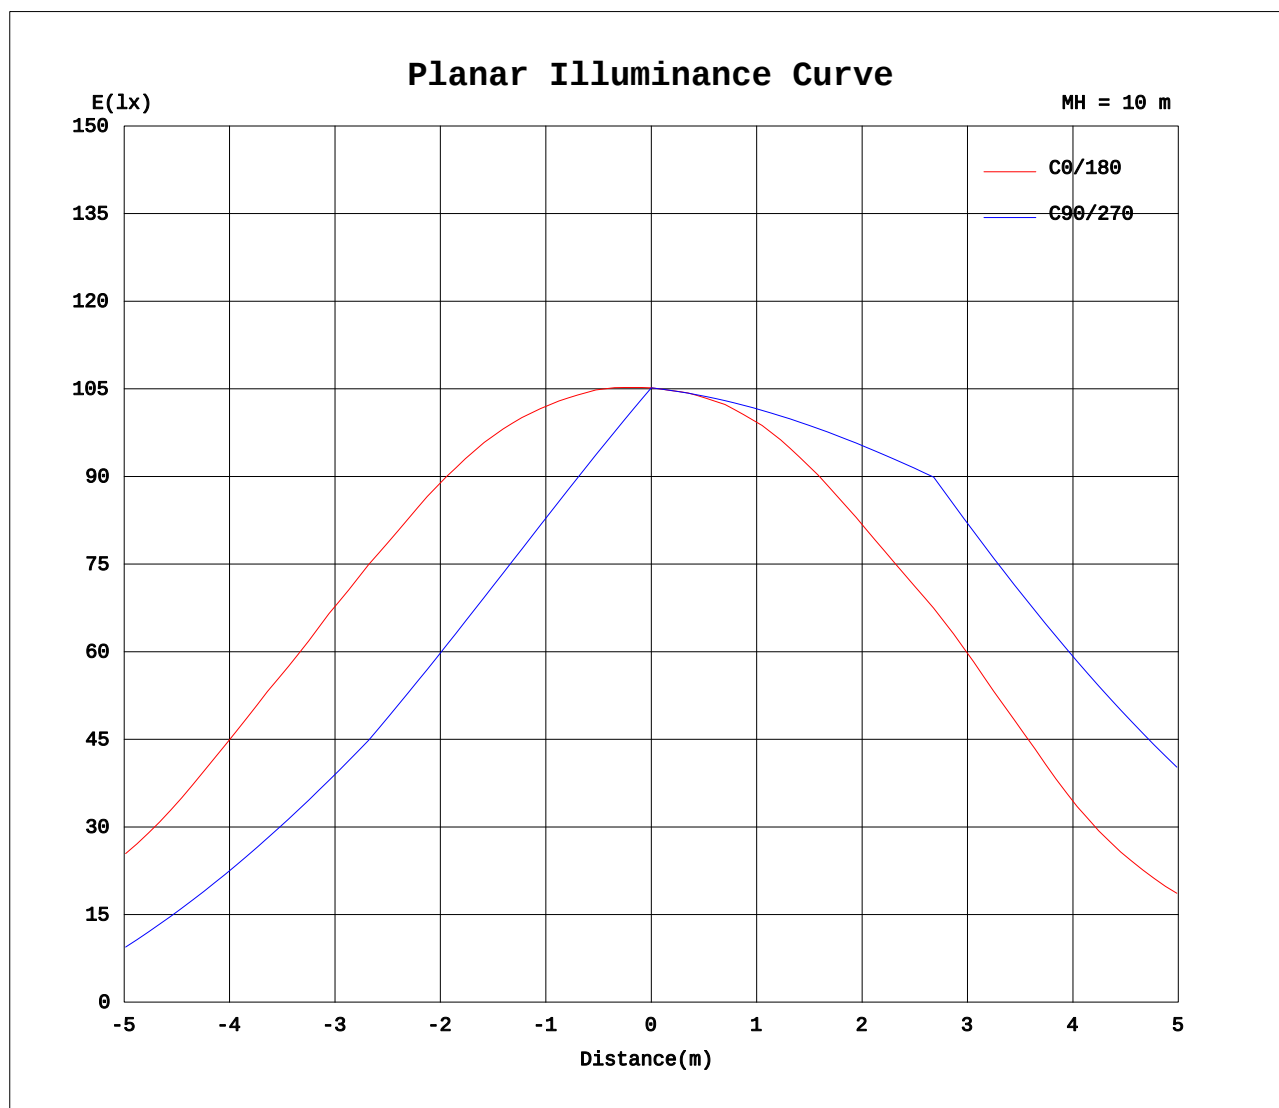

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: Y
Test Date: 2025-04-21

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.291
Humidity: 65.0%
Test Distance: 8.750m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.1V I:0.0767A P:8.989W PF:0.9760 Lamp Flux:235x1 lm		
NAME: 490281 TEMPEST	TYPE:490281 TEMPEST	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

Table - -1

UNIT: $\times 10 \text{cd}$ [illegible]

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: Y
Test Date: 2025-04-21

```

Range: 0 - 90DEG
Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

```

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.1V I:0.0767A P:8.989W PF:0.9760 Lamp Flux:235x1 lm		
NAME: 490281 TEMPEST	TYPE:490281 TEMPEST	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

Table - -2

UNIT: $\times 10 \text{cd}$ [illegible]

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: Y
Test Date: 2025-04-21

```

Range: 0 - 90DEG
Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

```

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.1V I:0.0767A P:8.989W PF:0.9760 Lamp Flux:235x1 lm		
NAME: 490281 TEMPEST	TYPE:490281 TEMPEST	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

Table - - 3

UNIT: $\times 10\text{cd}$ [illegible]

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: Y
Test Date: 2025-04-21

```

Range: 0 - 90DEG
Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

```

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.1V I:0.0767A P:8.989W PF:0.9760 Lamp Flux:235x1 lm		
NAME: 490281 TEMPEST	TYPE:490281 TEMPEST	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

Table - -4

UNIT: $\times 10 \text{cd}$ [illegible]

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: Y
Test Date: 2025-04-21

```

Range: 0 - 90DEG
Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

```