


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.1V I:0.1029A P:12.08W PF:0.9777 Lamp Flux:235x1 lm		
NAME: 490282 TEMPEST	TYPE:490282 TEMPEST	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 93.47 lm/W			
MODEL	490282 TEMPEST	I _{max} (cd)	13067	S/MH(C0/180)	0.65
NOMINAL POWER(W)	12	LOR(%)	480.6	S/MH(C90/270)	0.84
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	7208.8	η UP, DN(C0-180)	0.0,153.5
NOMINAL FLUX(lm)	1500	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.0,327.1
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	120	η down(%)	480.6	CIBSE SHR MAX	0.65

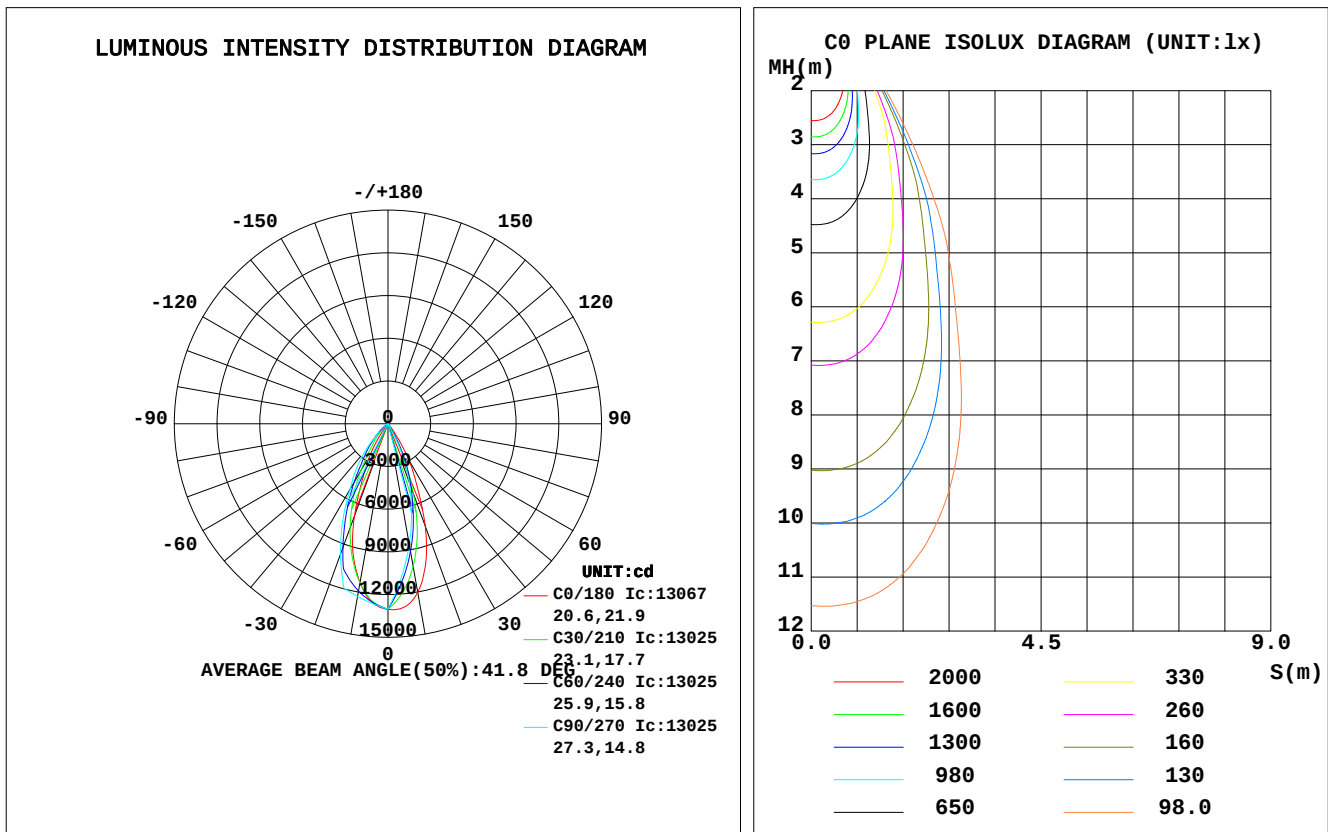

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:Y
Test Date:2025-04-22

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
5	1293	1147	1082	1123	1261	1253	1267	1276	0- 5	297.2	297.2	4.12, 19.8
10	1203	955.5	861.4	909.5	1133	1162	1231	1207	5- 10	814.0	1111	15.4, 74.1
15	1021	731.6	640.8	681.4	948.1	1033	1196	1092	10- 15	1171	2283	31.7, 152
20	765.9	489.6	437.9	434.6	689.6	880.0	974.3	960.3	15- 20	1313	3595	49.9, 240
25	484.1	266.2	234.9	231.7	416.9	649.7	752.8	736.0	20- 25	1193	4788	66.4, 319
30	292.3	111.9	31.91	96.64	246.6	438.0	531.2	503.3	25- 30	912.0	5700	79.1, 380
35	107.7	29.93	21.30	26.85	82.52	269.3	389.4	311.4	30- 35	604.0	6304	87.5, 420
40	28.46	0.7371	10.69	1.387	18.45	150.4	247.6	177.7	35- 40	384.0	6688	92.8, 446
45	7.459	0.4004	0.0732	0.8672	6.867	92.37	105.8	109.0	40- 45	225.8	6914	95.9, 461
50	3.197	0.2305	0.0641	0.5056	3.553	54.18	79.28	55.99	45- 50	120.0	7034	97.6, 469
55	1.987	0.0622	0.0551	0.2479	2.265	24.12	52.77	15.52	50- 55	74.24	7109	98.6, 474
60	1.416	0.0363	0.0460	0.1636	1.537	11.35	26.25	7.471	55- 60	44.98	7153	99.2, 477
65	1.086	0.0237	0.0777	0.0753	1.209	5.030	18.72	4.204	60- 65	24.85	7178	99.6, 479
70	0.7715	0.0347	0.1093	0.0401	0.9164	2.860	11.18	2.672	65- 70	15.76	7194	99.8, 480
75	0.4763	0.0651	0.1409	0.0695	0.6293	2.176	3.642	2.085	70- 75	9.326	7203	99.9, 480
80	0.2108	0.0737	0	0.0781	0.3663	1.350	0	1.326	75- 80	4.185	7208	100, 481
85	0	0	0	0	0.1603	0	0	0	80- 85	1.086	7209	100, 481
90	0	0	0	0	0.0102	0	0	0	85- 90	0.1214	7209	100, 481
95									90- 95			
100									95-100			
105									100-105			
110									105-110			
115									110-115			
120									115-120			
125									120-125			
130									125-130			
135									130-135			
140									135-140			
145									140-145			
150									145-150			
155									150-155			
160									155-160			
165									160-165			
170									165-170			
175									170-175			
180									175-180			
DEG	LUMINOUS INTENSITY:×10cd								UNIT:lm			


C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:Y
Test Date:2025-04-22

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.1V I:0.1029A P:12.08W PF:0.9777 Lamp Flux:235x1 lm		
NAME: 490282 TEMPEST	TYPE:490282 TEMPEST	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	5.72	5.72	5.72	5.59	5.59	5.59	5.34	5.34	5.34	5.11	5.11	5.11	4.90	4.90	4.90	4.81
1.0	5.34	5.23	5.13	5.24	5.14	5.05	5.05	4.97	4.89	4.87	4.81	4.75	4.71	4.66	4.61	4.53
2.0	5.00	4.82	4.67	4.92	4.75	4.61	4.77	4.63	4.51	4.62	4.51	4.42	4.49	4.40	4.32	4.25
3.0	4.69	4.47	4.29	4.63	4.42	4.26	4.50	4.33	4.19	4.39	4.24	4.12	4.28	4.16	4.06	3.99
4.0	4.42	4.17	3.98	4.36	4.13	3.96	4.26	4.07	3.91	4.17	4.00	3.86	4.08	3.94	3.82	3.75
5.0	4.17	3.91	3.71	4.12	3.88	3.70	4.04	3.83	3.67	3.96	3.78	3.63	3.89	3.73	3.60	3.54
6.0	3.94	3.68	3.48	3.90	3.65	3.47	3.83	3.61	3.45	3.77	3.57	3.43	3.71	3.54	3.40	3.34
7.0	3.74	3.47	3.28	3.71	3.45	3.27	3.65	3.42	3.26	3.59	3.39	3.24	3.54	3.36	3.22	3.16
8.0	3.55	3.28	3.10	3.52	3.27	3.10	3.47	3.25	3.08	3.43	3.22	3.07	3.38	3.20	3.06	3.00
9.0	3.38	3.12	2.94	3.36	3.11	2.94	3.31	3.09	2.93	3.27	3.06	2.92	3.23	3.05	2.91	2.85
10.0	3.22	2.97	2.80	3.20	2.96	2.79	3.17	2.94	2.78	3.13	2.92	2.78	3.10	2.91	2.77	2.71

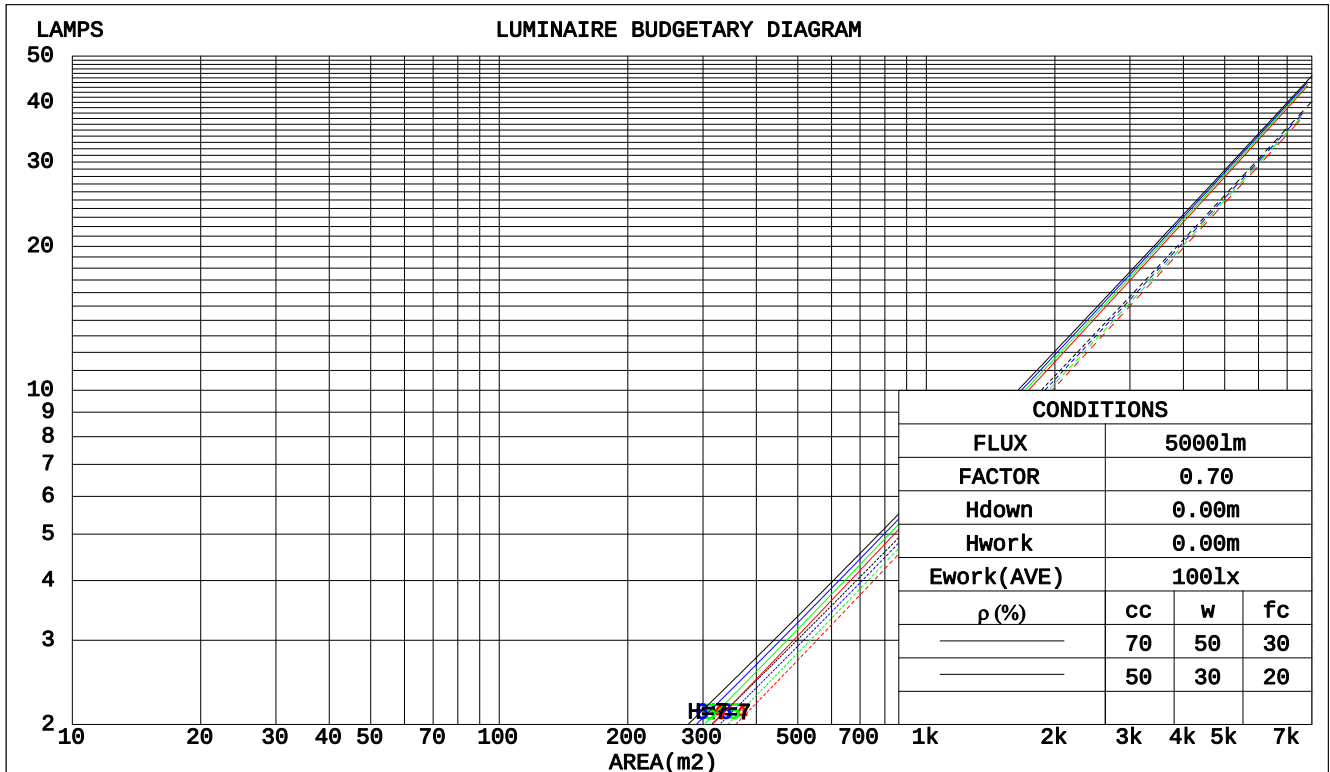

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:Y
Test Date:2025-04-22

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.1V I:0.1029A P:12.08W PF:0.9777 Lamp Flux:235x1 lm														
NAME: 490282 TEMPEST							TYPE:490282 TEMPEST					WEIGHT:		
SPEC.:							DIM.:					SERIAL No.:		
MFR.:							SUR.:					PROTECTION ANGLE:		

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.813	.462	.146	.780	.445	.141	.720	.413	.132	.665	.383	.123	.613	.356	.115	
2.0	.774	.424	.130	.747	.411	.127	.696	.387	.120	.650	.365	.114	.607	.343	.108	
3.0	.734	.391	.117	.711	.381	.115	.669	.362	.110	.629	.345	.106	.592	.328	.101	
4.0	.697	.362	.106	.678	.355	.105	.641	.340	.101	.606	.326	.098	.575	.312	.095	
5.0	.663	.338	.098	.646	.332	.097	.614	.320	.094	.584	.308	.092	.556	.297	.089	
6.0	.631	.317	.091	.617	.311	.090	.589	.302	.088	.562	.292	.086	.538	.283	.084	
7.0	.603	.298	.084	.590	.294	.084	.565	.286	.082	.542	.278	.081	.520	.270	.079	
8.0	.576	.282	.079	.565	.278	.079	.543	.271	.077	.522	.264	.076	.502	.258	.075	
9.0	.552	.267	.075	.541	.264	.074	.522	.258	.073	.503	.252	.072	.486	.247	.071	
10.0	.529	.254	.070	.520	.251	.070	.502	.246	.069	.486	.241	.069	.470	.236	.068	

ρcc	80%			70%			50%			30%			10%			0	
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)										
0.0	.915	.915	.915	.782	.782	.782	.534	.534	.534	.307	.307	.307	.098	.098	.098		
1.0	.820	.756	.699	.701	.649	.602	.480	.447	.416	.276	.258	.242	.088	.083	.078		
2.0	.744	.637	.547	.637	.548	.473	.437	.379	.330	.252	.221	.193	.081	.071	.063		
3.0	.682	.545	.437	.585	.471	.379	.401	.327	.266	.232	.191	.157	.074	.062	.051		
4.0	.630	.474	.355	.541	.410	.308	.372	.286	.217	.215	.167	.128	.069	.054	.042		
5.0	.587	.418	.293	.504	.361	.255	.347	.252	.180	.201	.148	.107	.065	.048	.035		
6.0	.550	.372	.245	.473	.322	.213	.326	.226	.151	.189	.133	.090	.061	.043	.030		
7.0	.518	.335	.208	.445	.291	.181	.308	.204	.128	.179	.120	.076	.058	.039	.025		
8.0	.489	.305	.178	.421	.264	.155	.291	.186	.110	.170	.110	.066	.055	.036	.022		
9.0	.464	.280	.155	.400	.243	.135	.277	.171	.096	.161	.101	.057	.052	.033	.019		
10.0	.442	.258	.136	.381	.224	.118	.264	.158	.084	.154	.093	.050	.050	.031	.017		

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:Y
Test Date:2025-04-22

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.1V I:0.1029A P:12.08W PF:0.9777 Lamp Flux:235x1 lm										
NAME: 490282 TEMPEST					TYPE:490282 TEMPEST			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.:					SUR.:			PROTECTION ANGLE:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	4.7	5.6	4.9	5.8	5.9	-5.9	-5.0	-5.7	-4.9	-4.7
3H	4.6	5.4	4.8	5.6	5.8	-6.1	-5.3	-5.8	-5.1	-4.9
4H	4.5	5.2	4.8	5.5	5.7	-6.2	-5.4	-5.9	-5.2	-4.9
6H	4.4	5.1	4.7	5.4	5.6	-6.2	-5.5	-5.9	-5.3	-5.0
8H	4.3	5.0	4.7	5.3	5.6	-6.3	-5.6	-6.0	-5.3	-5.1
12H	4.3	5.0	4.6	5.2	5.5	-6.3	-5.7	-6.0	-5.4	-5.1
4H 2H	4.5	5.2	4.7	5.4	5.7	-6.2	-5.4	-5.9	-5.2	-5.0
3H	4.3	5.0	4.6	5.2	5.5	-6.3	-5.7	-6.0	-5.4	-5.1
4H	4.2	4.8	4.5	5.1	5.4	-6.4	-5.8	-6.1	-5.5	-5.2
6H	4.1	4.6	4.5	5.0	5.3	-6.5	-6.0	-6.1	-5.6	-5.3
8H	4.1	4.6	4.4	4.9	5.3	-6.6	-6.1	-6.2	-5.7	-5.3
12H	4.0	4.5	4.4	4.8	5.2	-6.6	-6.2	-6.2	-5.8	-5.4
8H 4H	4.1	4.5	4.4	4.9	5.3	-6.6	-6.1	-6.2	-5.7	-5.3
6H	4.0	4.4	4.4	4.8	5.2	-6.6	-6.2	-6.2	-5.8	-5.4
8H	3.9	4.3	4.3	4.7	5.1	-6.7	-6.3	-6.3	-5.9	-5.5
12H	3.8	4.2	4.3	4.6	5.1	-6.8	-6.4	-6.3	-6.0	-5.5
12H 4H	4.0	4.5	4.4	4.8	5.2	-6.6	-6.2	-6.2	-5.8	-5.4
6H	3.9	4.3	4.3	4.7	5.1	-6.7	-6.3	-6.2	-5.9	-5.5
8H	3.8	4.1	4.3	4.6	5.1	-6.8	-6.4	-6.3	-6.0	-5.5
Variations with the observer position at spacings:										
S = 1.0H	+ 6.5 / -13.7					+ 4.9 / -13.8				
1.5H	+ 9.2 / -17.8					+ 7.7 / -14.2				
2.0H	+ 8.6 / -12.0					+ 0.7 / - 0.8				

CIE Pub.117 Corrected 1500 lm Total Lamp Luminous Flux.(8log(F/F0) = 1.4)

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:Y
Test Date:2025-04-22

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.1V I:0.1029A P:12.08W PF:0.9777 Lamp Flux:235x1 lm		
NAME: 490282 TEMPEST	TYPE:490282 TEMPEST	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	418	387	369	415	386	368	412	385	368	350
0.80	454	426	408	451	424	407	445	421	405	387
1.00	476	449	432	472	447	430	464	446	428	409
1.25	495	470	454	490	468	452	481	462	448	428
1.50	509	486	470	503	482	467	492	475	462	441
2.00	522	502	486	515	497	483	502	487	475	450
2.50	530	511	497	522	505	493	507	494	484	455
3.00	537	521	508	529	514	502	512	501	492	461
4.00	547	534	523	537	526	516	520	511	503	469
5.00	553	542	533	543	533	525	524	517	511	474
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:20DEG
 Operators:Y
 Test Date:2025-04-22

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.291
 Humidity:65.0%
 Test Distance:8.750m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.1V I:0.1029A P:12.08W PF:0.9777 Lamp Flux:235x1 lm		
NAME: 490282 TEMPEST	TYPE:490282 TEMPEST	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

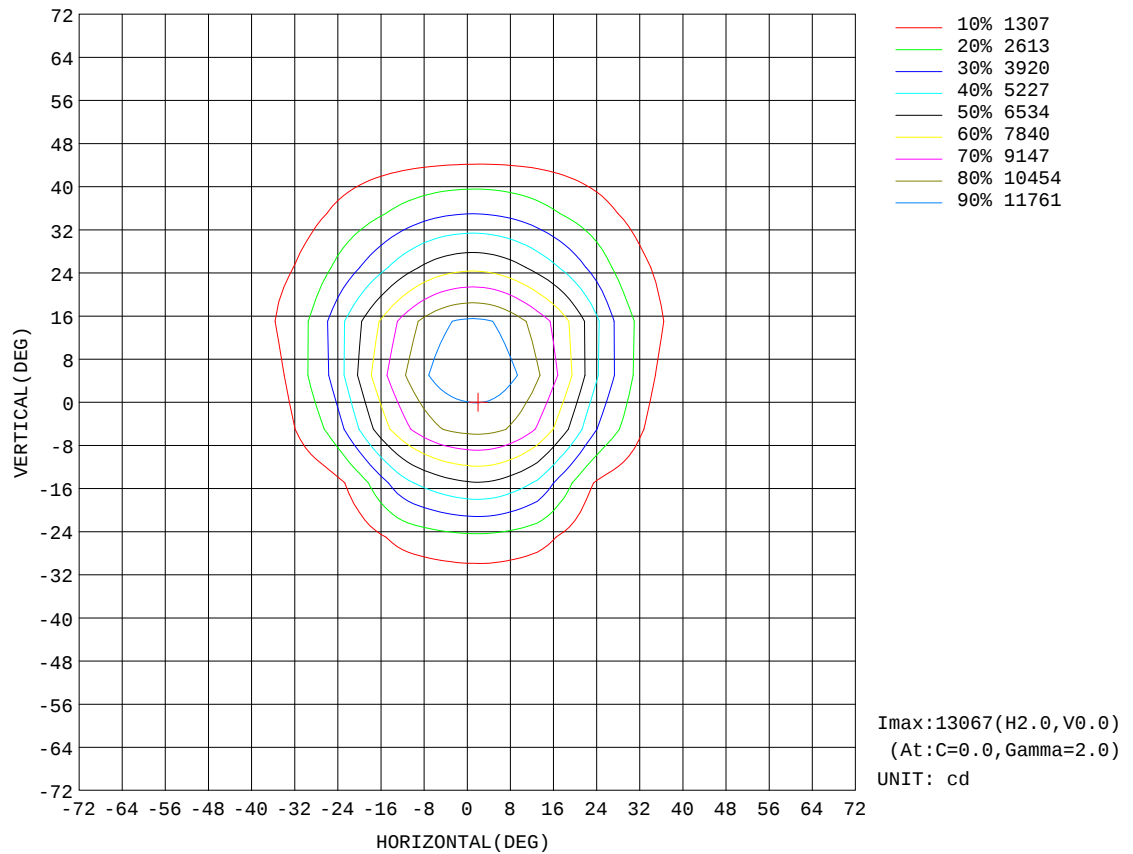


C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:Y
Test Date:2025-04-22

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.1V I:0.1029A P:12.08W PF:0.9777 Lamp Flux:235x1 lm		
NAME: 490282 TEMPEST	TYPE:490282 TEMPEST	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

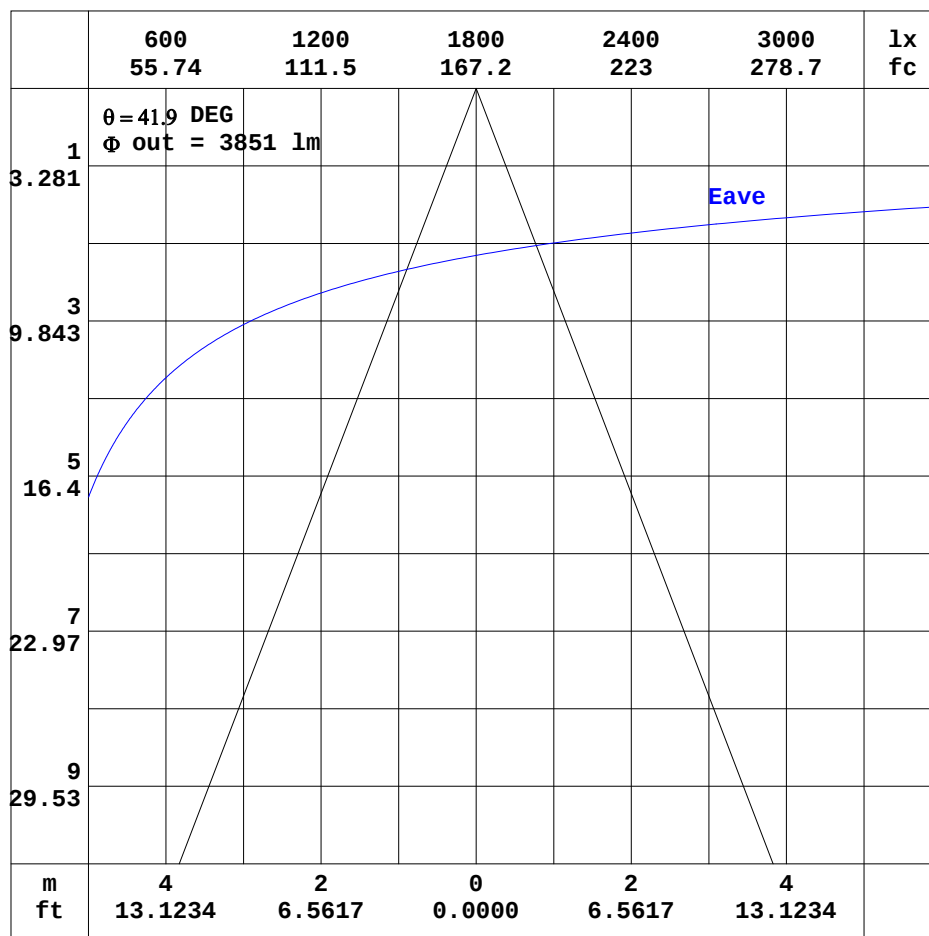

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: Y
Test Date: 2025-04-22


```

Range: 0 - 90DEG
Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

```

ISOLUX DIAGRAM

Test:U:120.1V I:0.1029A P:12.08W PF:0.9777 Lamp Flux:235x1 lm		
NAME: 490282 TEMPEST	TYPE:490282 TEMPEST	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

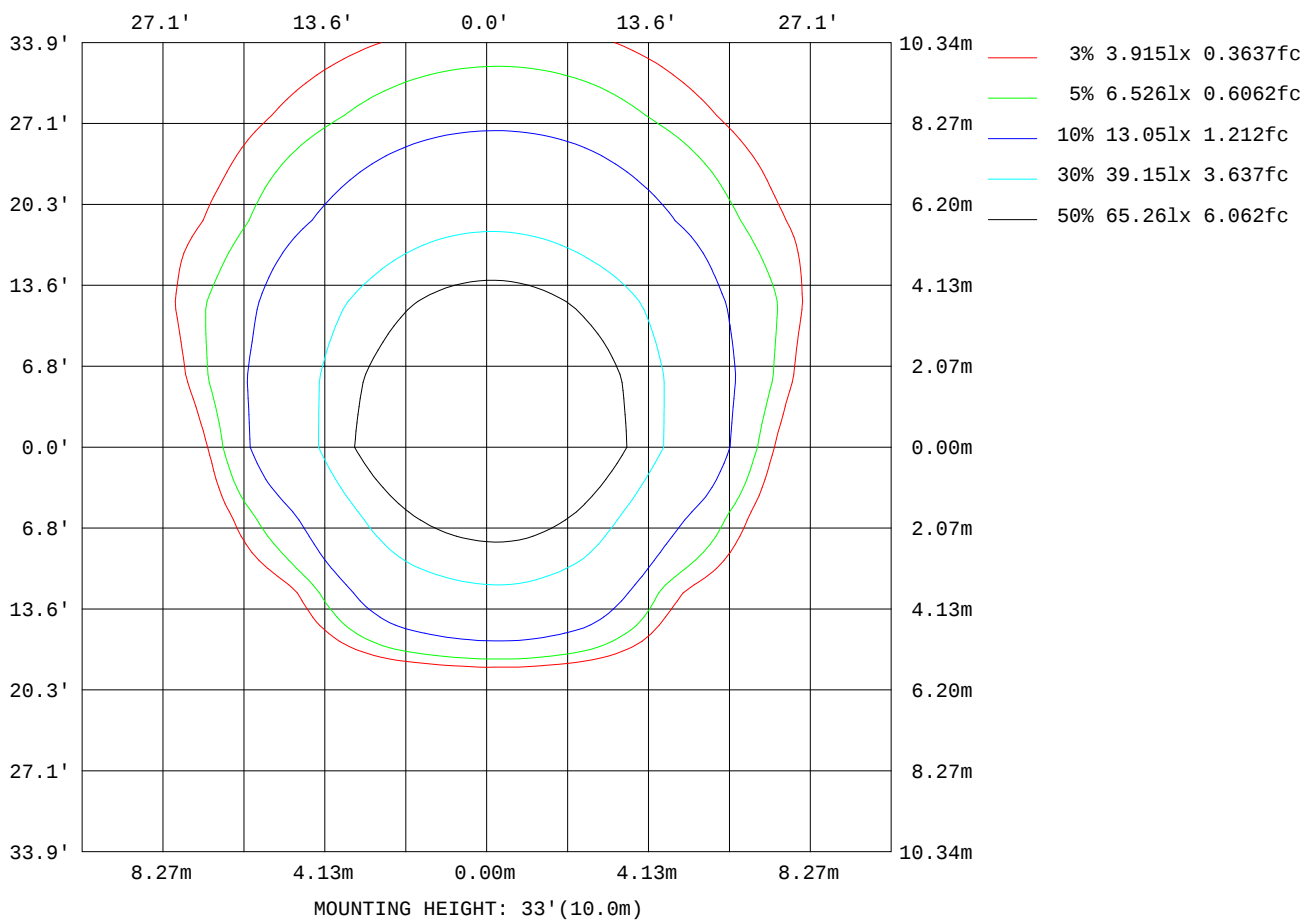

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:Y
Test Date:2025-04-22

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.1V I:0.1029A P:12.08W PF:0.9777 Lamp Flux:235x1 lm		
NAME: 490282 TEMPEST	TYPE:490282 TEMPEST	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:


AvgL	cd/m2
L_0~180(65)av	136
L_0~180(75)av	107
L_0~180(85)av	46
L_90~270(65)av	1112
L_90~270(75)av	365
L_90~270(85)av	0
L_45(65)av	276
L_45(75)av	212
L_45(85)av	0

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:Y
Test Date:2025-04-22

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

Planar Illuminance Curve

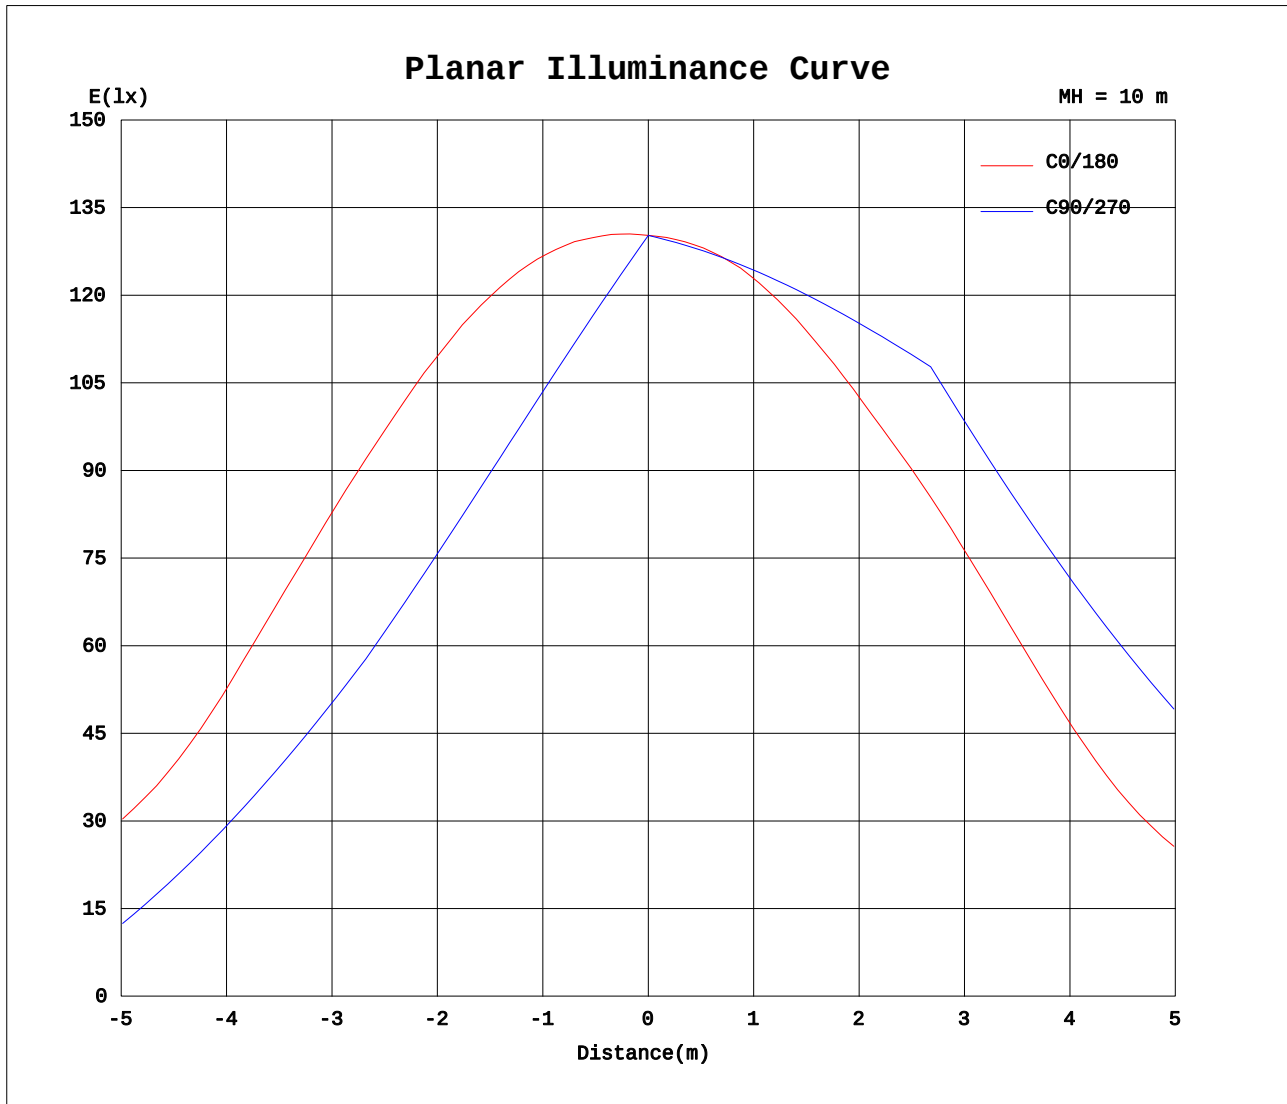

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: Y
Test Date: 2025-04-22

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.291
Humidity: 65.0%
Test Distance: 8.750m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.1V I:0.1029A P:12.08W PF:0.9777 Lamp Flux:235x1 lm		
NAME: 490282 TEMPEST	TYPE:490282 TEMPEST	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

Table - -1

UNIT: $\times 10 \text{cd}$ [illegible]

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: Y
Test Date: 2025-04-22

```

Range: 0 - 90DEG
Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

```

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.1V I:0.1029A P:12.08W PF:0.9777 Lamp Flux:235x1 lm		
NAME: 490282 TEMPEST	TYPE:490282 TEMPEST	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

Table - -2

UNIT: $\times 10 \text{cd}$ [illegible]

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: Y
Test Date: 2025-04-22

```

Range: 0 - 90DEG
Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

```

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.1V I:0.1029A P:12.08W PF:0.9777 Lamp Flux:235x1 lm		
NAME: 490282 TEMPEST	TYPE:490282 TEMPEST	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

Table - - 3

UNIT: $\times 10\text{cd}$ [illegible]

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: Y
Test Date: 2025-04-22

```

Range: 0 - 90DEG
Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

```

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.1V I:0.1029A P:12.08W PF:0.9777 Lamp Flux:235x1 lm		
NAME: 490282 TEMPEST	TYPE:490282 TEMPEST	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

Table - -4

UNIT: $\times 10 \text{cd}$ [illegible]

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: Y
Test Date: 2025-04-22

```

Range: 0 - 90DEG
Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

```