


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.1V I:0.0765A P:8.965W PF:0.9753 Lamp Flux:235x1 lm		
NAME: 490284 TEMPEST	TYPE:490284 TEMPEST	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 101.91 lm/W			
MODEL	490284 TEMPEST	I _{max} (cd)	10633	S/MH(C0/180)	0.61
NOMINAL POWER(W)	9	LOR(%)	388.8	S/MH(C90/270)	0.85
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	5831.9	η UP, DN(C0-180)	0.0, 120.1
NOMINAL FLUX(lm)	1500	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.0, 268.7
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	120	η down(%)	388.8	CIBSE SHR MAX	0.65

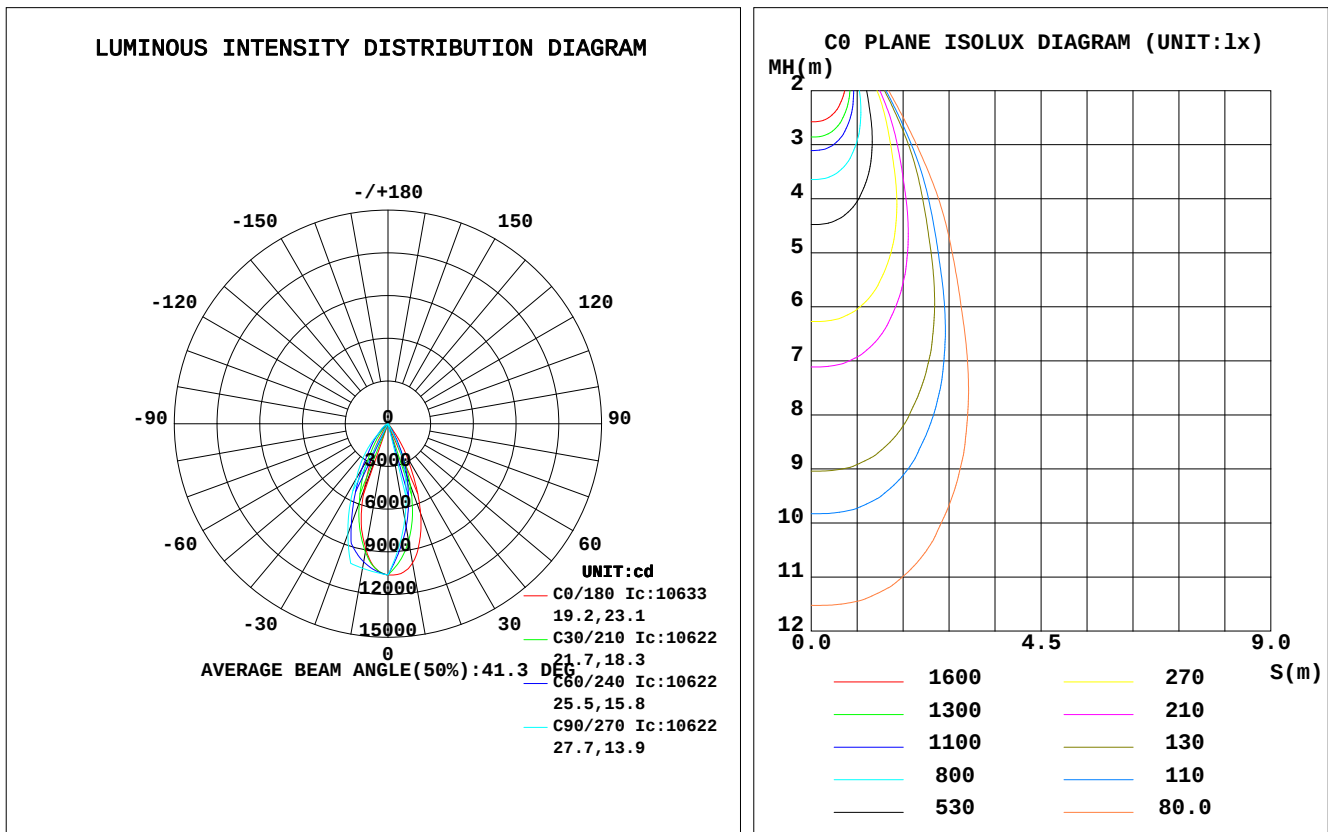

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:Y
Test Date:2025-04-21

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
5	1056	929.5	871.5	901.5	1019	1026	1046	1050	0- 5	242.0	242.0	4.15,16.1
10	992.5	778.7	680.9	709.8	894.4	948.1	1031	1010	5- 10	662.6	904.6	15.5,60.3
15	857.1	604.5	490.2	499.5	727.3	831.7	1015	935.7	10- 15	952.4	1857	31.8,124
20	669.7	411.7	333.2	277.8	487.5	695.9	824.7	834.2	15- 20	1063	2920	50.1,195
25	444.9	238.5	176.1	130.4	288.8	497.3	634.5	642.3	20- 25	965.1	3885	66.6,259
30	266.1	104.7	19.04	51.30	137.4	327.1	444.3	447.7	25- 30	736.8	4622	79.3,308
35	114.8	28.07	12.70	15.02	28.71	192.6	326.0	279.1	30- 35	484.7	5107	87.6,340
40	25.47	0.6030	6.359	0.3913	7.275	105.5	207.6	161.1	35- 40	307.5	5414	92.8,361
45	6.553	0.3943	0.0163	0.2392	2.842	63.29	89.27	97.75	40- 45	180.8	5595	95.9,373
50	2.778	0.2509	0.0117	0.1306	1.497	32.57	66.65	57.34	45- 50	96.96	5692	97.6,379
55	1.543	0.1180	0.0072	0	1.052	10.69	44.03	26.50	50- 55	60.34	5752	98.6,383
60	1.118	0.0763	0.0027	0	0.8241	5.119	21.41	10.74	55- 60	36.50	5789	99.3,386
65	0.8802	0.0272	0.0298	0	0.6210	2.565	15.16	3.908	60- 65	20.03	5809	99.6,387
70	0.6687	0.0100	0.0569	0.0110	0.4096	1.597	8.909	2.082	65- 70	12.43	5821	99.8,388
75	0.4439	0.0334	0.0840	0.0367	0.2280	1.279	2.658	1.596	70- 75	7.019	5828	99.9,389
80	0.2353	0.0434	0	0.0477	0.0789	0.8458	0	0.9995	75- 80	2.862	5831	100,389
85	0.0754	0	0	0	0	0	0	0	80- 85	0.6995	5832	100,389
90	0	0	0	0	0	0	0	0	85- 90	0.0686	5832	100,389
95									90- 95			
100									95-100			
105									100-105			
110									105-110			
115									110-115			
120									115-120			
125									120-125			
130									125-130			
135									130-135			
140									135-140			
145									140-145			
150									145-150			
155									150-155			
160									155-160			
165									160-165			
170									165-170			
175									170-175			
180									175-180			
DEG	LUMINOUS INTENSITY:×10cd									UNIT:lm		


C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:Y
Test Date:2025-04-21

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.1V I:0.0765A P:8.965W PF:0.9753 Lamp Flux:235x1 lm		
NAME: 490284 TEMPEST	TYPE:490284 TEMPEST	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	4.63	4.63	4.63	4.52	4.52	4.52	4.32	4.32	4.32	4.14	4.14	4.14	3.97	3.97	3.97	3.89
1.0	4.32	4.23	4.15	4.24	4.16	4.09	4.08	4.02	3.96	3.94	3.89	3.84	3.81	3.77	3.73	3.66
2.0	4.05	3.90	3.78	3.98	3.85	3.73	3.86	3.75	3.65	3.74	3.65	3.57	3.64	3.56	3.50	3.44
3.0	3.80	3.62	3.47	3.75	3.58	3.45	3.64	3.51	3.39	3.55	3.44	3.34	3.47	3.37	3.29	3.23
4.0	3.57	3.38	3.22	3.53	3.35	3.20	3.45	3.29	3.17	3.37	3.24	3.13	3.30	3.19	3.09	3.04
5.0	3.37	3.16	3.01	3.34	3.14	2.99	3.27	3.10	2.97	3.21	3.06	2.94	3.15	3.02	2.92	2.86
6.0	3.19	2.98	2.82	3.16	2.96	2.81	3.10	2.93	2.79	3.05	2.90	2.78	3.00	2.86	2.76	2.70
7.0	3.03	2.81	2.66	3.00	2.80	2.65	2.95	2.77	2.64	2.91	2.75	2.62	2.87	2.72	2.61	2.56
8.0	2.88	2.66	2.51	2.85	2.65	2.51	2.81	2.63	2.50	2.77	2.61	2.49	2.74	2.59	2.48	2.43
9.0	2.74	2.53	2.38	2.72	2.52	2.38	2.68	2.50	2.37	2.65	2.48	2.36	2.62	2.47	2.36	2.31
10.0	2.61	2.40	2.27	2.60	2.40	2.26	2.56	2.38	2.26	2.54	2.37	2.25	2.51	2.36	2.24	2.20

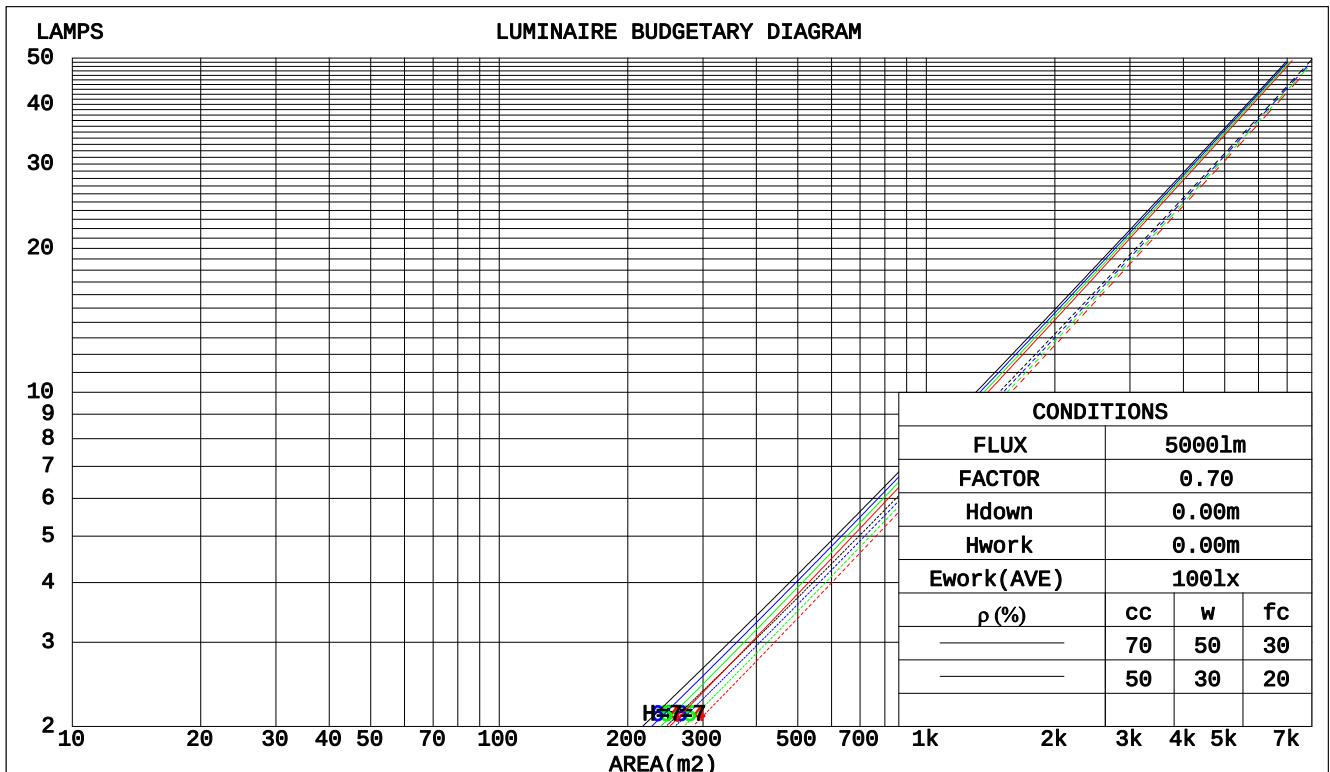

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:Y
Test Date:2025-04-21

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.1V I:0.0765A P:8.965W PF:0.9753 Lamp Flux:235x1 lm									
NAME: 490284 TEMPEST					TYPE:490284 TEMPEST			WEIGHT:	
SPEC.:					DIM.:			SERIAL No.:	
MFR.:					SUR.:			PROTECTION ANGLE:	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.656	.373	.118	.630	.359	.114	.581	.333	.106	.536	.309	.099	.495	.287	.092	
2.0	.625	.342	.105	.603	.332	.102	.562	.313	.097	.524	.294	.092	.490	.277	.087	
3.0	.593	.316	.094	.574	.308	.093	.540	.292	.089	.508	.278	.085	.478	.265	.082	
4.0	.563	.292	.086	.547	.286	.085	.517	.274	.082	.489	.263	.079	.464	.252	.077	
5.0	.535	.273	.079	.521	.268	.078	.496	.258	.076	.471	.249	.074	.449	.240	.072	
6.0	.510	.256	.073	.498	.251	.072	.475	.244	.071	.454	.236	.069	.434	.229	.068	
7.0	.487	.241	.068	.476	.237	.068	.456	.231	.066	.437	.224	.065	.420	.218	.064	
8.0	.465	.227	.064	.456	.224	.063	.438	.219	.063	.421	.213	.062	.406	.208	.061	
9.0	.446	.216	.060	.437	.213	.060	.421	.208	.059	.406	.204	.058	.392	.199	.058	
10.0	.427	.205	.057	.420	.203	.057	.406	.199	.056	.392	.195	.055	.379	.191	.055	

ρ_{cc}	80%			70%			50%			30%			10%			0	
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ_{fc}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)										
0.0	.741	.741	.741	.633	.633	.633	.432	.432	.432	.248	.248	.248	.079	.079	.079		
1.0	.663	.612	.566	.567	.525	.487	.388	.361	.337	.223	.209	.196	.072	.067	.063		
2.0	.602	.515	.443	.515	.444	.383	.353	.307	.267	.204	.179	.156	.065	.058	.051		
3.0	.551	.441	.353	.473	.381	.306	.325	.264	.215	.187	.154	.127	.060	.050	.042		
4.0	.510	.384	.287	.437	.331	.249	.301	.231	.176	.174	.135	.104	.056	.044	.034		
5.0	.475	.338	.237	.408	.292	.206	.281	.204	.146	.163	.120	.086	.052	.039	.028		
6.0	.444	.301	.198	.382	.261	.173	.264	.183	.122	.153	.107	.073	.049	.035	.024		
7.0	.418	.271	.168	.360	.235	.147	.249	.165	.104	.144	.097	.062	.047	.032	.020		
8.0	.396	.247	.144	.340	.214	.126	.236	.150	.089	.137	.089	.053	.044	.029	.018		
9.0	.375	.226	.125	.323	.196	.109	.224	.138	.078	.130	.081	.046	.042	.027	.015		
10.0	.357	.209	.110	.308	.181	.096	.214	.128	.068	.125	.075	.041	.040	.025	.013		

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:Y
Test Date:2025-04-21

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.1V I:0.0765A P:8.965W PF:0.9753 Lamp Flux:235x1 lm										
NAME: 490284 TEMPEST					TYPE:490284 TEMPEST			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.:					SUR.:			PROTECTION ANGLE:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	5.3	6.2	5.6	6.4	6.5	-8.6	-7.7	-8.4	-7.6	-7.4
3H	5.2	6.0	5.4	6.2	6.4	-8.8	-8.0	-8.5	-7.8	-7.6
4H	5.1	5.9	5.4	6.1	6.3	-8.8	-8.1	-8.6	-7.9	-7.6
6H	5.0	5.7	5.3	6.0	6.2	-8.9	-8.2	-8.6	-8.0	-7.7
8H	5.0	5.7	5.3	5.9	6.2	-9.0	-8.3	-8.7	-8.0	-7.8
12H	4.9	5.6	5.2	5.8	6.1	-9.0	-8.4	-8.7	-8.1	-7.8
4H 2H	5.1	5.8	5.3	6.1	6.3	-8.9	-8.1	-8.6	-7.9	-7.7
3H	4.9	5.6	5.2	5.8	6.1	-9.0	-8.4	-8.7	-8.1	-7.8
4H	4.8	5.4	5.2	5.7	6.0	-9.1	-8.5	-8.8	-8.2	-7.9
6H	4.7	5.3	5.1	5.6	5.9	-9.2	-8.7	-8.8	-8.3	-8.0
8H	4.7	5.2	5.1	5.5	5.9	-9.2	-8.7	-8.8	-8.4	-8.0
12H	4.6	5.1	5.0	5.4	5.8	-9.3	-8.8	-8.9	-8.5	-8.1
8H 4H	4.7	5.2	5.1	5.5	5.9	-9.2	-8.7	-8.8	-8.4	-8.0
6H	4.6	5.0	5.0	5.4	5.8	-9.3	-8.9	-8.9	-8.5	-8.1
8H	4.5	4.9	5.0	5.3	5.7	-9.4	-9.0	-8.9	-8.6	-8.2
12H	4.5	4.8	4.9	5.2	5.7	-9.4	-9.1	-9.0	-8.7	-8.2
12H 4H	4.6	5.1	5.0	5.4	5.8	-9.3	-8.8	-8.9	-8.5	-8.1
6H	4.5	4.9	5.0	5.3	5.7	-9.4	-9.0	-8.9	-8.6	-8.2
8H	4.5	4.8	4.9	5.2	5.7	-9.4	-9.1	-9.0	-8.7	-8.2
Variations with the observer position at spacings:										
S = 1.0H	+ 6.7 / -14.5					+ 4.6 / -14.3				
1.5H	+ 9.4 / -18.0					+ 7.4 / -14.7				
2.0H	+ 8.6 / -13.0					+ 0.7 / - 1.2				

CIE Pub.117 Corrected 1500 lm Total Lamp Luminous Flux.(8log(F/F0) = 1.4)

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:Y
Test Date:2025-04-21

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.1V I:0.0765A P:8.965W PF:0.9753 Lamp Flux:235x1 lm		
NAME: 490284 TEMPEST	TYPE:490284 TEMPEST	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	338	313	299	336	313	298	333	311	298	284
0.80	368	345	330	365	343	330	360	341	328	314
1.00	385	363	349	382	362	348	376	361	346	331
1.25	401	381	367	397	379	366	389	374	363	346
1.50	412	393	380	407	390	378	398	384	374	357
2.00	422	406	394	417	402	391	406	394	385	365
2.50	429	414	402	422	409	399	410	400	391	368
3.00	435	421	411	428	416	407	415	406	398	373
4.00	442	432	423	434	425	418	420	413	407	380
5.00	447	438	431	439	431	425	424	418	413	384
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:20DEG
 Operators:Y
 Test Date:2025-04-21

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.291
 Humidity:65.0%
 Test Distance:8.750m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.1V I:0.0765A P:8.965W PF:0.9753 Lamp Flux:235x1 lm		
NAME: 490284 TEMPEST	TYPE:490284 TEMPEST	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

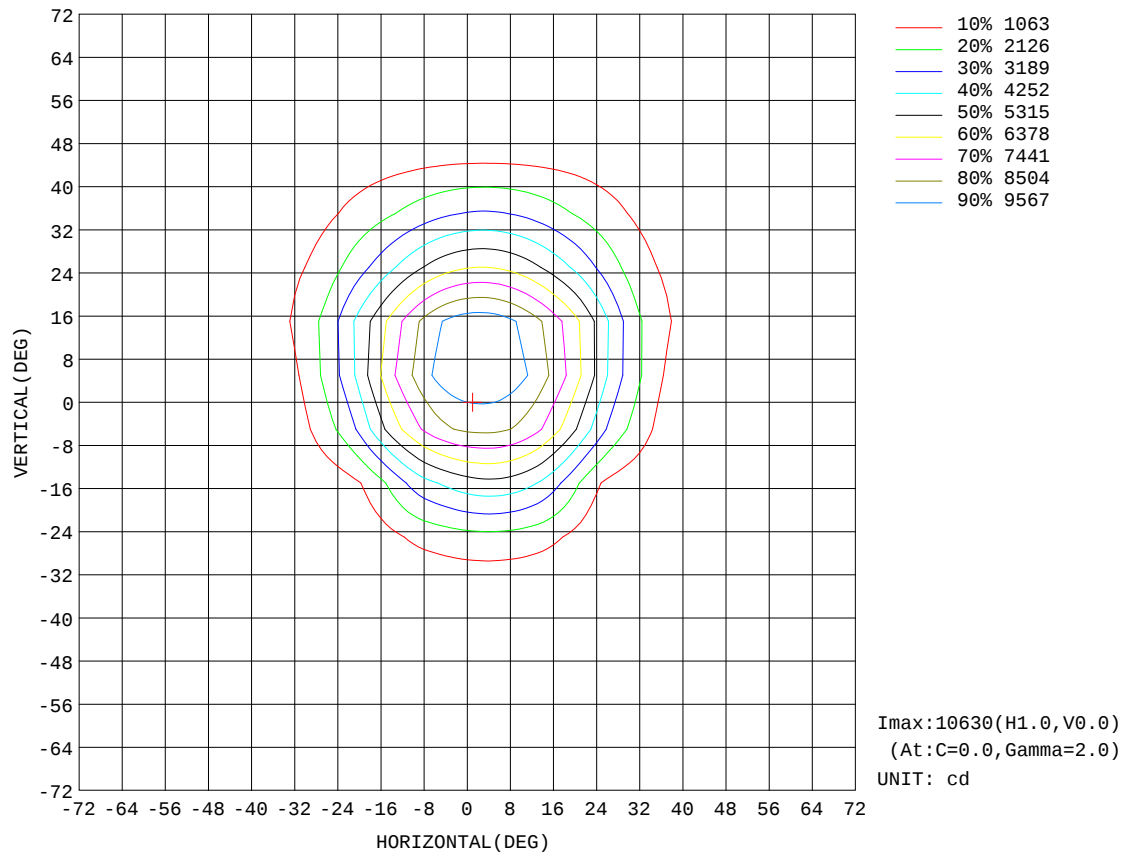


C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:Y
Test Date:2025-04-21

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.1V I:0.0765A P:8.965W PF:0.9753 Lamp Flux:235x1 lm		
NAME: 490284 TEMPEST	TYPE:490284 TEMPEST	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

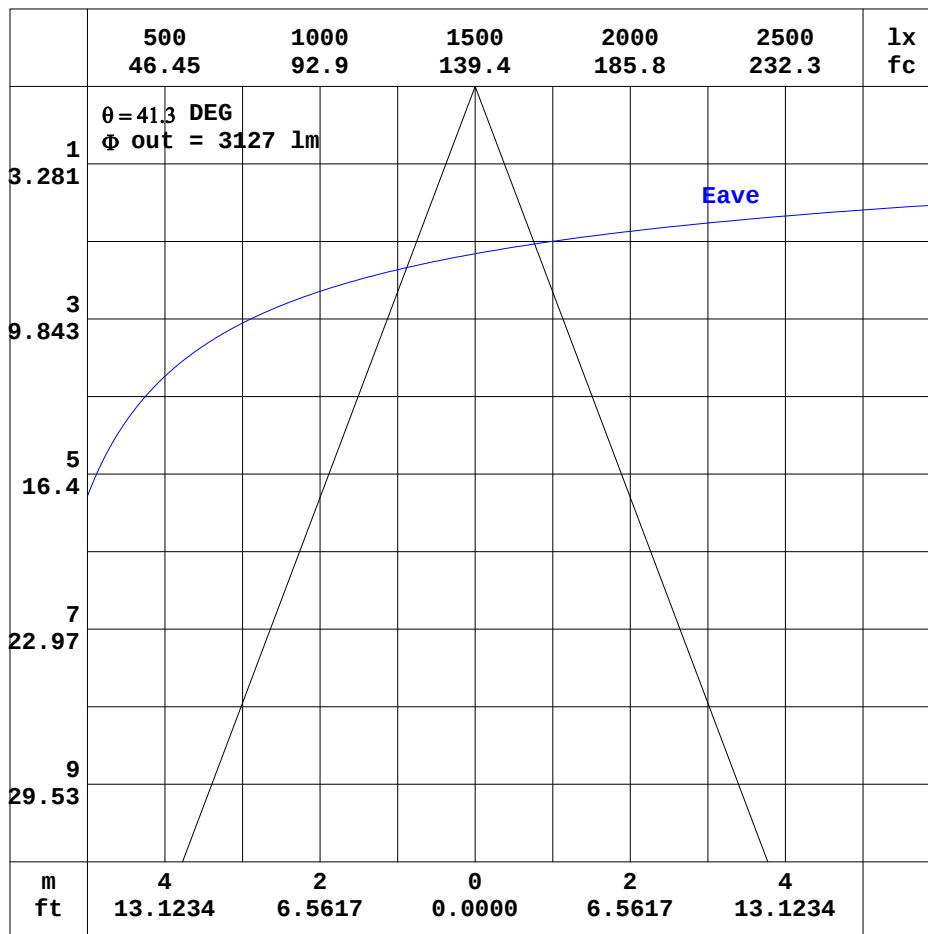


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: Y
Test Date: 2025-04-21

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.291
Humidity: 65.0%
Test Distance: 8.750m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.1V I:0.0765A P:8.965W PF:0.9753 Lamp Flux:235x1 lm		
NAME: 490284 TEMPEST	TYPE:490284 TEMPEST	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

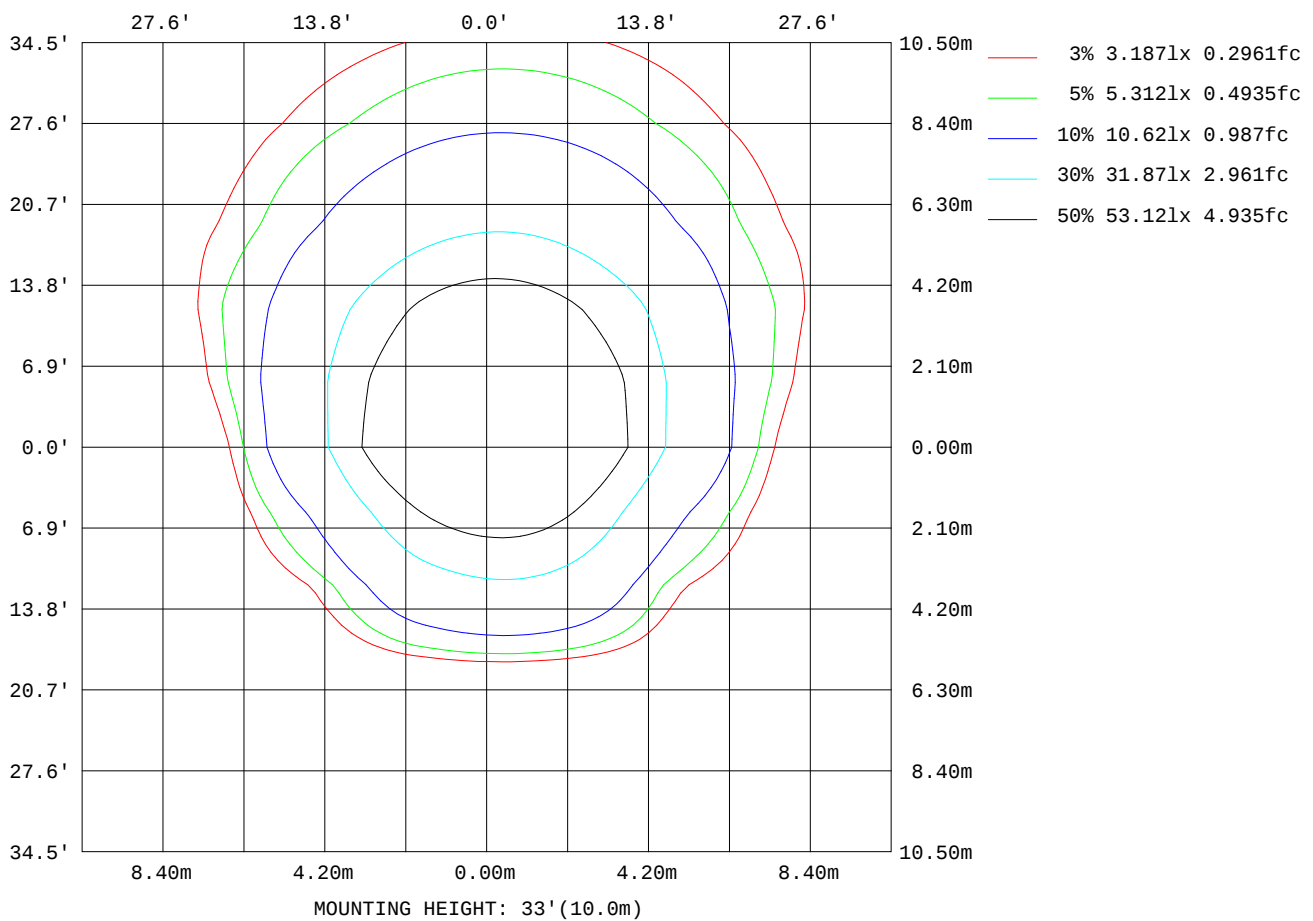

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:Y
Test Date:2025-04-21

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.1V I:0.0765A P:8.965W PF:0.9753 Lamp Flux:235x1 lm		
NAME: 490284 TEMPEST	TYPE:490284 TEMPEST	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:


AvgL	cd/m2
L_0~180(65)av	89
L_0~180(75)av	65
L_0~180(85)av	22
L_90~270(65)av	899
L_90~270(75)av	265
L_90~270(85)av	0
L_45(65)av	192
L_45(75)av	142
L_45(85)av	0

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:Y
Test Date:2025-04-21

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

Planar Illuminance Curve

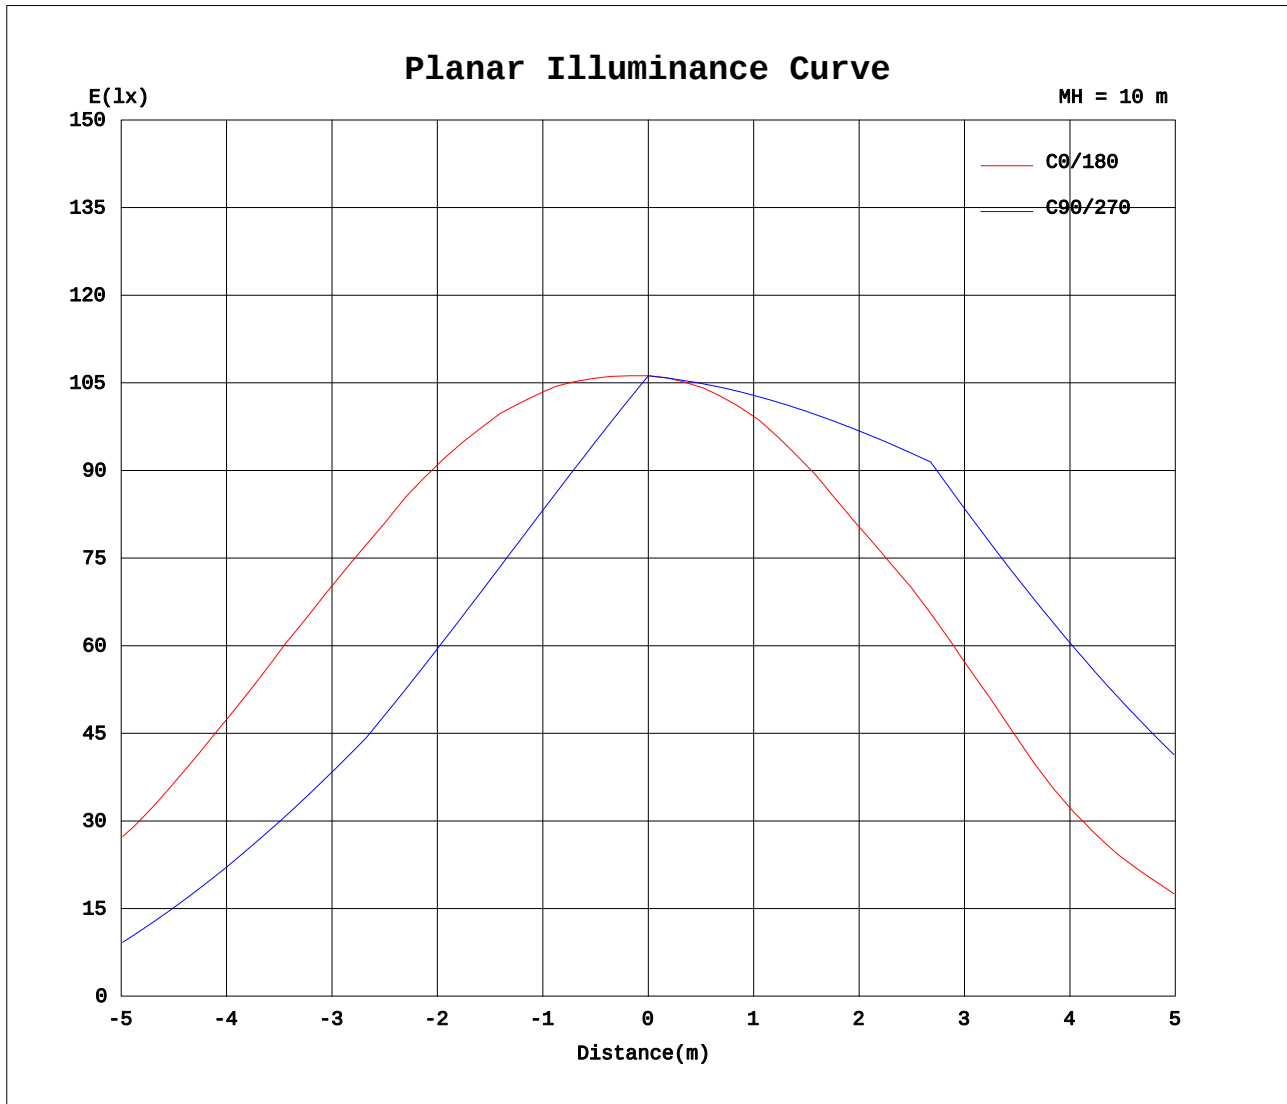

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: Y
Test Date: 2025-04-21

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.291
Humidity: 65.0%
Test Distance: 8.750m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.1V I:0.0765A P:8.965W PF:0.9753 Lamp Flux:235x1 lm		
NAME: 490284 TEMPEST	TYPE:490284 TEMPEST	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

Table - -1

UNIT: $\times 10\text{cd}$ [illegible]

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: Y
Test Date: 2025-04-21

```

Range: 0 - 90DEG
Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

```

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.1V I:0.0765A P:8.965W PF:0.9753 Lamp Flux:235x1 lm		
NAME: 490284 TEMPEST	TYPE:490284 TEMPEST	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

Table - -2

UNIT: $\times 10 \text{cd}$ [illegible]

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: Y
Test Date: 2025-04-21

```

Range: 0 - 90DEG
Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

```

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.1V I:0.0765A P:8.965W PF:0.9753 Lamp Flux:235x1 lm		
NAME: 490284 TEMPEST	TYPE:490284 TEMPEST	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

Table - - 3

UNIT: $\times 10\text{cd}$ [illegible]

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: Y
Test Date: 2025-04-21

```

Range: 0 - 90DEG
Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

```

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.1V I:0.0765A P:8.965W PF:0.9753 Lamp Flux:235x1 lm		
NAME: 490284 TEMPEST	TYPE:490284 TEMPEST	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

Table - -4

UNIT: $\times 10\text{cd}$ [illegible]

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: Y
Test Date: 2025-04-21

```

Range: 0 - 90DEG
Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

```