


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.1V I:0.0993A P:11.65W PF:0.9770 Lamp Flux:235x1 lm		
NAME: 490285 TEMPEST	TYPE:490285 TEMPEST	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 97.15 lm/W			
MODEL	490285 TEMPEST	I _{max} (cd)	13279	S/MH(C0/180)	0.61
NOMINAL POWER(W)	12	LOR(%)	481.5	S/MH(C90/270)	0.84
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	7222.6	η UP, DN(C0-180)	0.0, 152.6
NOMINAL FLUX(lm)	1500	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.0, 329.0
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	120	η down(%)	481.5	CIBSE SHR MAX	0.65

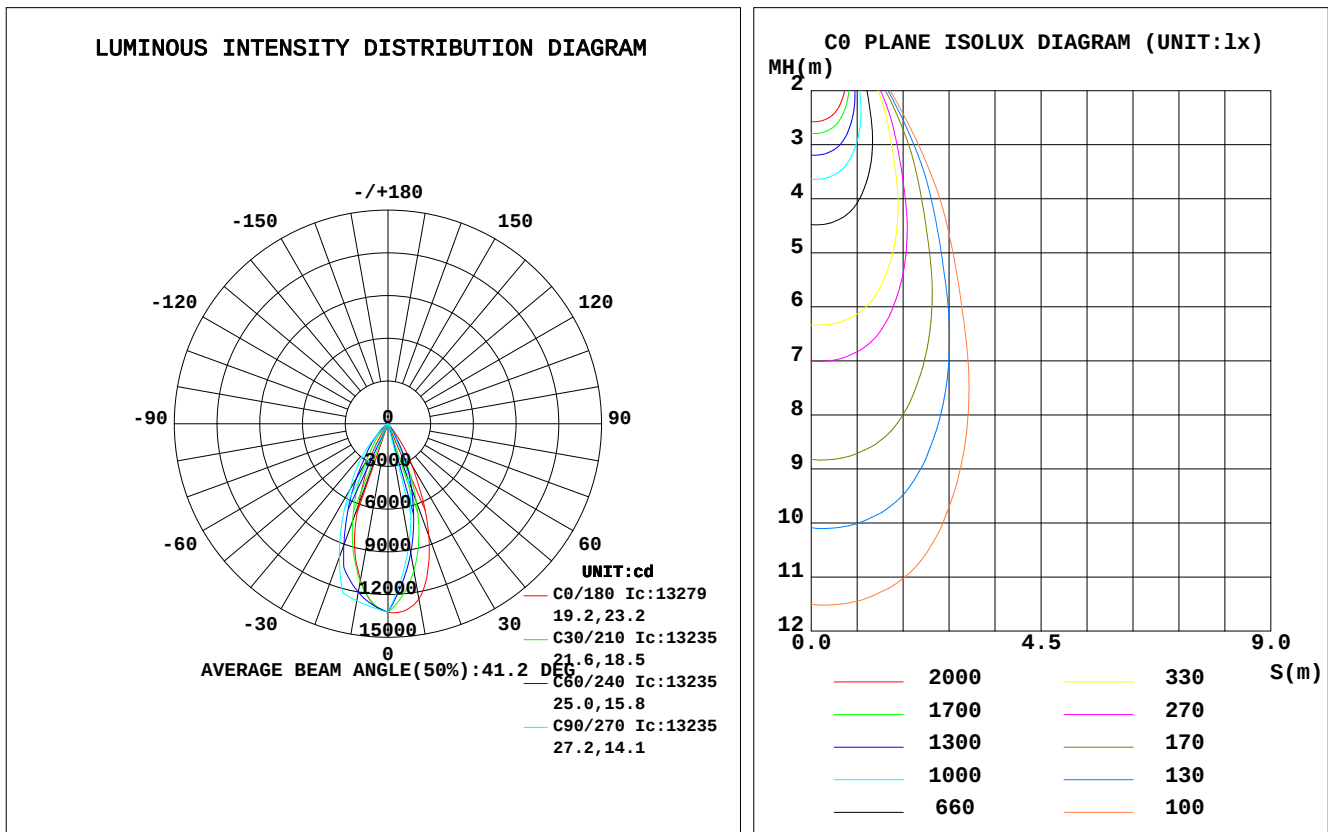

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:Y
Test Date:2025-04-18

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	φ zone	φ total	%lum, lamp
5	1319	1163	1089	1122	1263	1266	1293	1305	0- 5	301.1	301.1	4.17, 20.1
10	1250	974.5	854.2	881.6	1115	1159	1262	1251	5- 10	822.3	1123	15.6, 74.9
15	1077	759.0	619.5	631.5	905.7	1011	1231	1153	10- 15	1181	2304	31.9, 154
20	839.8	526.4	422.4	366.0	608.4	841.1	998.9	1015	15- 20	1315	3619	50.1, 241
25	562.3	313.2	225.3	176.1	352.7	606.0	766.4	780.8	20- 25	1195	4814	66.7, 321
30	338.5	148.1	28.12	67.82	166.7	397.5	533.9	546.5	25- 30	912.4	5727	79.3, 382
35	163.6	42.60	18.75	19.04	33.94	230.3	388.6	344.4	30- 35	599.0	6326	87.6, 422
40	36.49	1.050	9.382	0.5724	9.734	125.4	243.3	200.6	35- 40	381.2	6707	92.9, 447
45	9.419	0.6963	0.0135	0.3286	4.294	77.24	98.05	123.2	40- 45	222.1	6929	95.9, 462
50	4.259	0.4307	0.0090	0.1736	2.436	40.95	74.79	70.58	45- 50	116.9	7046	97.6, 470
55	2.399	0.2201	0.0045	0	1.503	13.91	51.53	31.61	50- 55	73.03	7119	98.6, 475
60	1.722	0.1355	0.0000	0	1.076	6.866	28.27	14.19	55- 60	45.58	7164	99.2, 478
65	1.308	0.0476	0.0361	0	0.8054	3.652	20.18	5.666	60- 65	26.36	7191	99.6, 479
70	0.9800	0.0105	0.0723	0.0115	0.5316	2.358	12.09	3.101	65- 70	16.74	7208	99.8, 481
75	0.6551	0.0351	0.1084	0.0384	0.2904	1.856	3.993	2.386	70- 75	9.756	7217	99.9, 481
80	0.3734	0.0455	0	0.0499	0.0925	1.191	0	1.503	75- 80	4.189	7221	100, 481
85	0.1296	0	0	0	0	0	0	0	80- 85	0.9981	7222	100, 481
90	0	0	0	0	0	0	0	0	85- 90	0.0991	7223	100, 482
95									90- 95			
100									95-100			
105									100-105			
110									105-110			
115									110-115			
120									115-120			
125									120-125			
130									125-130			
135									130-135			
140									135-140			
145									140-145			
150									145-150			
155									150-155			
160									155-160			
165									160-165			
170									165-170			
175									170-175			
180									175-180			
DEG	LUMINOUS INTENSITY:×10cd									UNIT:lm		


C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:Y
Test Date:2025-04-18

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.1V I:0.0993A P:11.65W PF:0.9770 Lamp Flux:235x1 lm		
NAME: 490285 TEMPEST	TYPE:490285 TEMPEST	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	5.73	5.73	5.73	5.60	5.60	5.60	5.35	5.35	5.35	5.12	5.12	5.12	4.91	4.91	4.91	4.82
1.0	5.36	5.24	5.14	5.25	5.15	5.06	5.06	4.98	4.90	4.88	4.82	4.76	4.72	4.67	4.62	4.54
2.0	5.01	4.83	4.68	4.93	4.76	4.62	4.78	4.64	4.52	4.63	4.52	4.43	4.50	4.41	4.33	4.26
3.0	4.70	4.48	4.30	4.64	4.43	4.27	4.51	4.34	4.20	4.40	4.25	4.13	4.29	4.17	4.07	4.00
4.0	4.43	4.18	3.99	4.37	4.14	3.97	4.27	4.08	3.92	4.18	4.01	3.88	4.09	3.95	3.83	3.76
5.0	4.18	3.92	3.73	4.13	3.89	3.71	4.05	3.84	3.68	3.97	3.79	3.64	3.90	3.74	3.61	3.55
6.0	3.95	3.69	3.50	3.92	3.67	3.48	3.85	3.63	3.46	3.78	3.59	3.44	3.72	3.55	3.42	3.35
7.0	3.75	3.48	3.29	3.72	3.46	3.29	3.66	3.43	3.27	3.60	3.40	3.25	3.55	3.37	3.23	3.17
8.0	3.56	3.30	3.11	3.54	3.28	3.11	3.48	3.26	3.09	3.44	3.23	3.08	3.39	3.21	3.07	3.01
9.0	3.39	3.13	2.95	3.37	3.12	2.95	3.32	3.10	2.94	3.28	3.08	2.93	3.25	3.06	2.92	2.86
10.0	3.24	2.98	2.81	3.22	2.97	2.80	3.18	2.95	2.80	3.14	2.93	2.79	3.11	2.92	2.78	2.72

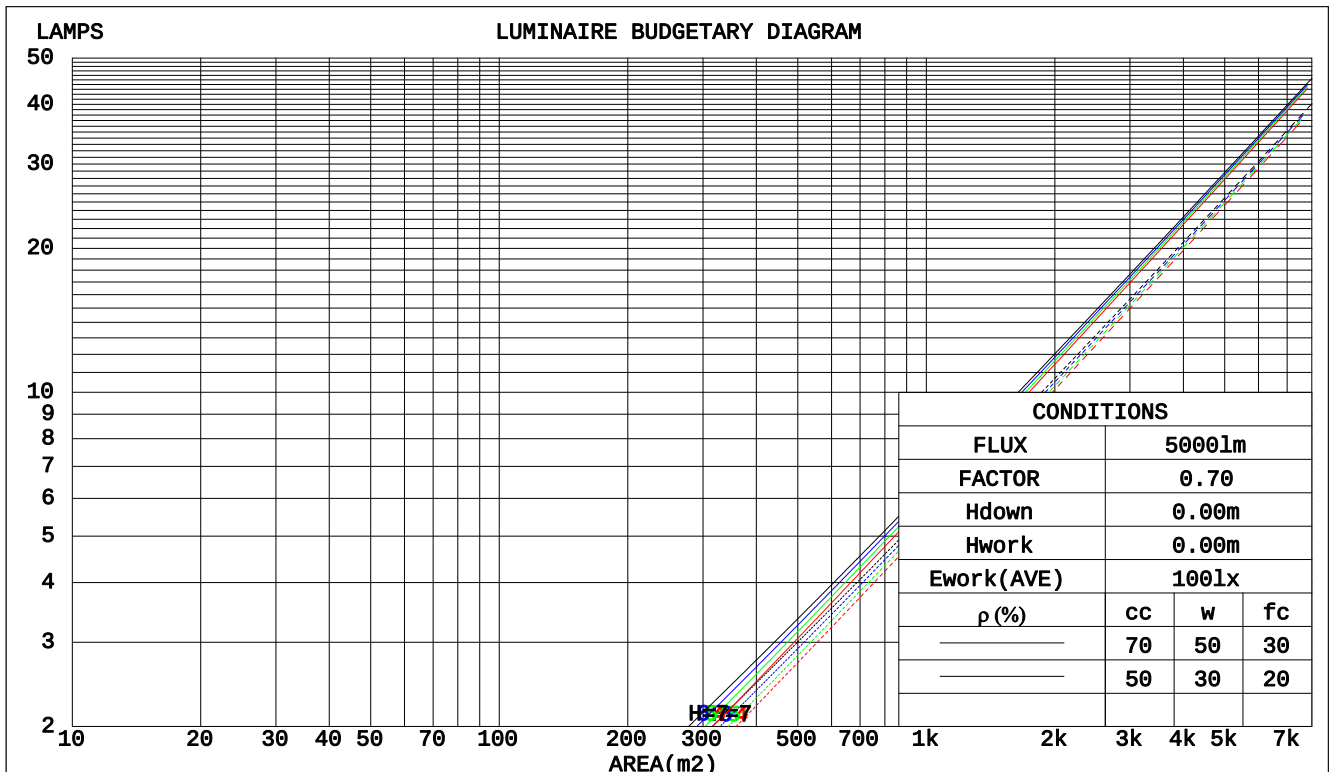

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:Y
Test Date:2025-04-18

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.1V I:0.0993A P:11.65W PF:0.9770 Lamp Flux:235x1 lm														
NAME: 490285 TEMPEST					TYPE:490285 TEMPEST					WEIGHT:				
SPEC.:					DIM.:					SERIAL No.:				
MFR.:					SUR.:					PROTECTION ANGLE:				

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.813	.462	.146	.781	.445	.141	.720	.413	.132	.665	.383	.123	.614	.356	.115	
2.0	.774	.424	.130	.747	.412	.127	.697	.387	.120	.650	.365	.114	.607	.343	.108	
3.0	.734	.391	.117	.712	.381	.115	.669	.362	.110	.629	.345	.106	.592	.328	.101	
4.0	.697	.362	.107	.678	.355	.105	.641	.340	.101	.606	.326	.098	.574	.312	.095	
5.0	.663	.338	.098	.646	.332	.097	.614	.320	.094	.584	.308	.092	.556	.297	.089	
6.0	.631	.316	.091	.617	.311	.090	.588	.302	.088	.562	.292	.086	.538	.283	.084	
7.0	.602	.298	.084	.589	.294	.084	.565	.285	.082	.541	.278	.081	.520	.270	.079	
8.0	.576	.281	.079	.564	.278	.079	.542	.271	.077	.522	.264	.076	.502	.258	.075	
9.0	.552	.267	.075	.541	.264	.074	.522	.258	.073	.503	.252	.072	.486	.247	.071	
10.0	.529	.254	.070	.520	.251	.070	.502	.246	.069	.485	.241	.069	.470	.236	.068	

ρ _{CC}	80%			70%			50%			30%			10%			0	
ρ _W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ _{fC}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)										
0.0	.917	.917	.917	.784	.784	.784	.535	.535	.535	.307	.307	.307	.098	.098	.098		
1.0	.821	.758	.701	.703	.650	.603	.481	.447	.417	.277	.259	.243	.089	.083	.078		
2.0	.745	.638	.548	.638	.549	.474	.437	.380	.331	.252	.221	.194	.081	.072	.063		
3.0	.683	.547	.438	.586	.471	.380	.402	.328	.266	.232	.191	.157	.075	.062	.051		
4.0	.631	.475	.356	.542	.410	.309	.373	.286	.218	.216	.168	.129	.069	.055	.042		
5.0	.588	.418	.294	.505	.362	.255	.348	.253	.180	.201	.148	.107	.065	.048	.035		
6.0	.550	.373	.246	.473	.323	.214	.326	.226	.151	.189	.133	.090	.061	.043	.030		
7.0	.518	.336	.208	.446	.291	.182	.308	.204	.129	.179	.120	.077	.058	.039	.025		
8.0	.490	.305	.179	.422	.265	.156	.292	.186	.111	.170	.110	.066	.055	.036	.022		
9.0	.465	.280	.155	.400	.243	.135	.277	.171	.096	.162	.101	.057	.052	.033	.019		
10.0	.442	.258	.136	.381	.224	.119	.265	.158	.084	.154	.093	.050	.050	.031	.017		

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:Y
Test Date:2025-04-18

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.1V I:0.0993A P:11.65W PF:0.9770 Lamp Flux:235x1 lm										
NAME: 490285 TEMPEST					TYPE:490285 TEMPEST			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.:					SUR.:			PROTECTION ANGLE:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	6.5	7.4	6.7	7.5	7.7	-6.2	-5.3	-6.0	-5.2	-5.0
3H	6.3	7.1	6.6	7.3	7.5	-6.4	-5.6	-6.1	-5.4	-5.2
4H	6.2	7.0	6.5	7.2	7.4	-6.5	-5.7	-6.2	-5.5	-5.3
6H	6.2	6.9	6.4	7.1	7.4	-6.6	-5.8	-6.3	-5.6	-5.3
8H	6.1	6.8	6.4	7.1	7.3	-6.6	-5.9	-6.3	-5.7	-5.4
12H	6.1	6.7	6.4	7.0	7.3	-6.6	-6.0	-6.3	-5.7	-5.4
4H 2H	6.2	7.0	6.5	7.2	7.4	-6.5	-5.7	-6.2	-5.5	-5.3
3H	6.0	6.7	6.4	7.0	7.3	-6.6	-6.0	-6.3	-5.7	-5.4
4H	6.0	6.6	6.3	6.9	7.2	-6.7	-6.1	-6.4	-5.8	-5.5
6H	5.9	6.4	6.2	6.7	7.1	-6.8	-6.3	-6.4	-6.0	-5.6
8H	5.8	6.3	6.2	6.7	7.0	-6.9	-6.4	-6.5	-6.0	-5.7
12H	5.8	6.2	6.2	6.6	7.0	-6.9	-6.5	-6.5	-6.1	-5.7
8H 4H	5.8	6.3	6.2	6.7	7.0	-6.9	-6.4	-6.5	-6.0	-5.7
6H	5.7	6.1	6.1	6.5	6.9	-7.0	-6.6	-6.5	-6.2	-5.8
8H	5.7	6.0	6.1	6.4	6.9	-7.0	-6.7	-6.6	-6.3	-5.8
12H	5.6	5.9	6.1	6.4	6.8	-7.1	-6.8	-6.6	-6.3	-5.9
12H 4H	5.8	6.2	6.2	6.6	7.0	-6.9	-6.5	-6.5	-6.1	-5.7
6H	5.7	6.0	6.1	6.4	6.9	-7.0	-6.7	-6.6	-6.2	-5.8
8H	5.6	5.9	6.1	6.3	6.8	-7.1	-6.8	-6.6	-6.3	-5.9
Variations with the observer position at spacings:										
S = 1.0H	+ 6.7 / -14.5					+ 4.3 / -16.3				
1.5H	+ 9.4 / -17.6					+ 7.1 / -16.3				
2.0H	+ 8.3 / -13.0					+ 1.3 / - 0.9				

CIE Pub.117 Corrected 1500 lm Total Lamp Luminous Flux.(8log(F/F0) = 1.4)

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:Y
Test Date:2025-04-18

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.1V I:0.0993A P:11.65W PF:0.9770 Lamp Flux:235x1 lm		
NAME: 490285 TEMPEST	TYPE:490285 TEMPEST	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	419	388	370	417	387	369	413	386	369	351
0.80	455	427	409	452	425	408	446	422	406	389
1.00	477	450	433	473	448	431	465	447	429	410
1.25	497	471	455	491	469	453	482	463	449	429
1.50	510	487	471	504	483	468	493	476	463	442
2.00	523	503	487	516	498	484	503	488	476	451
2.50	531	512	498	523	506	494	508	495	485	456
3.00	538	522	509	530	515	503	513	502	493	462
4.00	548	535	524	538	527	517	521	512	504	470
5.00	554	543	534	544	534	526	525	518	512	475
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:Y
Test Date:2025-04-18

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 γ Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.1V I:0.0993A P:11.65W PF:0.9770 Lamp Flux:235x1 lm		
NAME: 490285 TEMPEST	TYPE:490285 TEMPEST	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

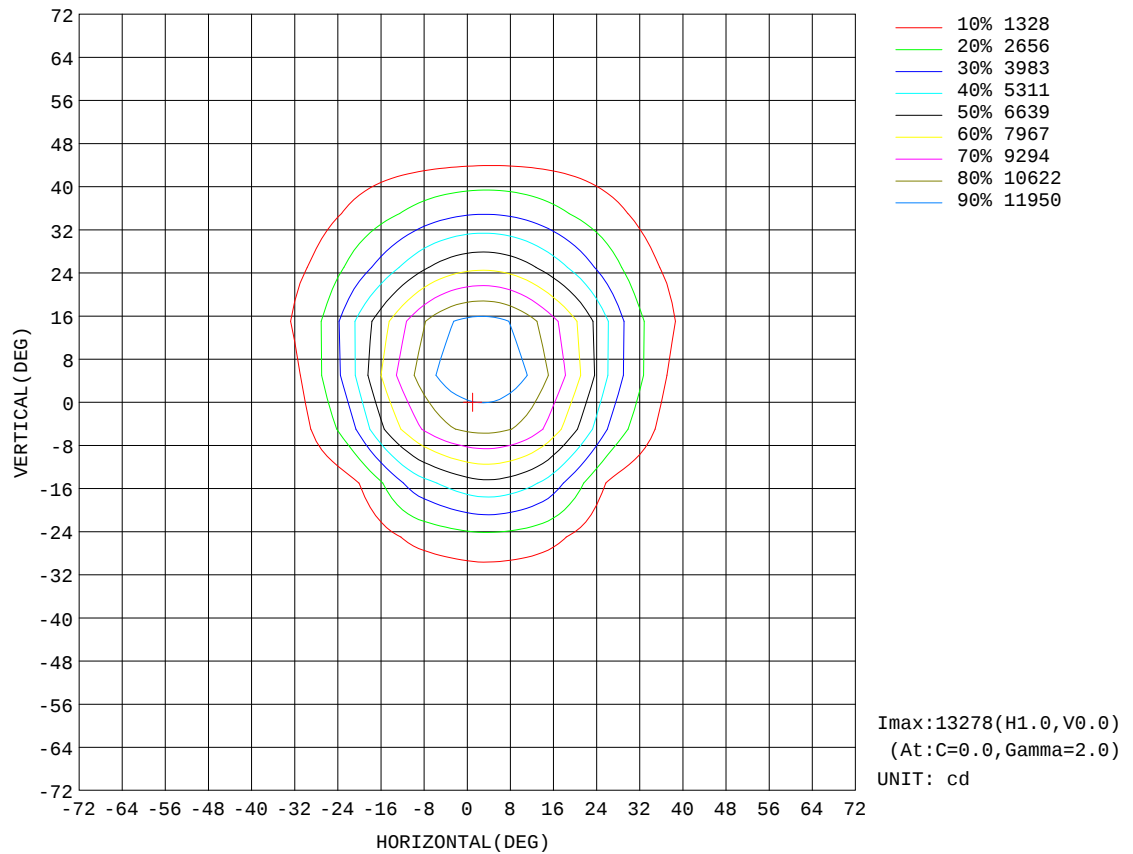


C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:Y
Test Date:2025-04-18

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.1V I:0.0993A P:11.65W PF:0.9770 Lamp Flux:235x1 lm		
NAME: 490285 TEMPEST	TYPE:490285 TEMPEST	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

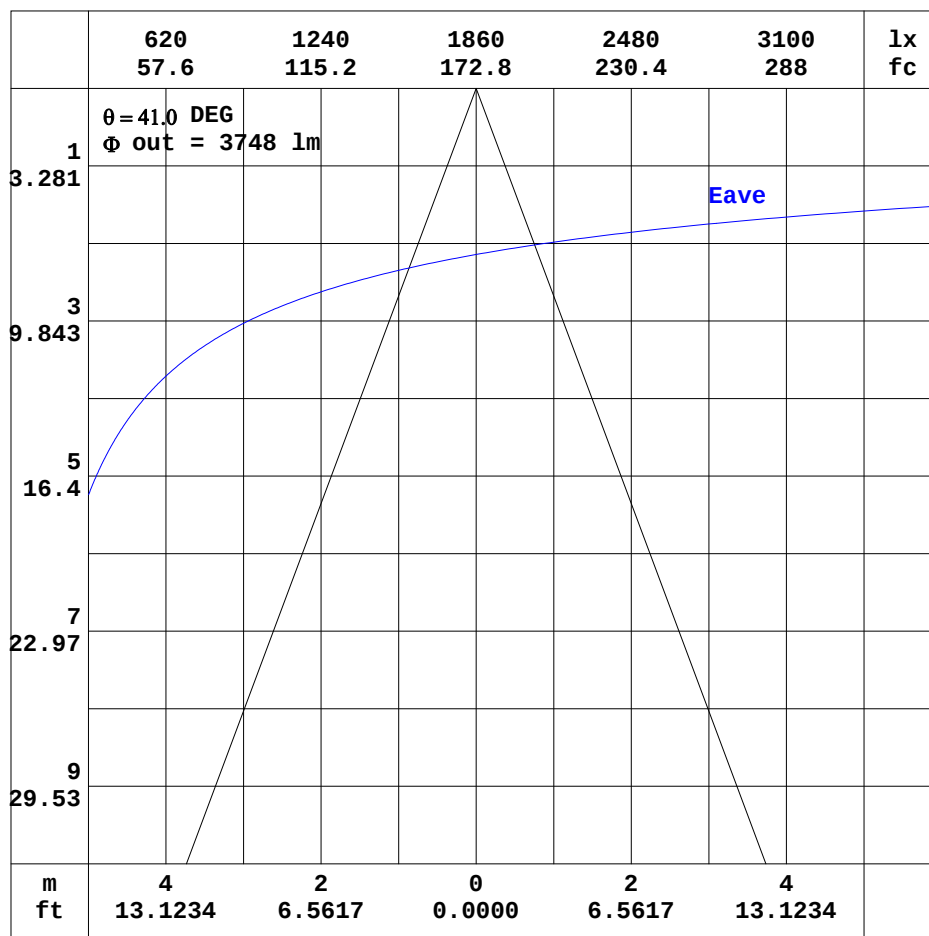


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: Y
Test Date: 2025-04-18

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.291
Humidity: 65.0%
Test Distance: 8.750m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.1V I:0.0993A P:11.65W PF:0.9770 Lamp Flux:235x1 lm		
NAME: 490285 TEMPEST	TYPE:490285 TEMPEST	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

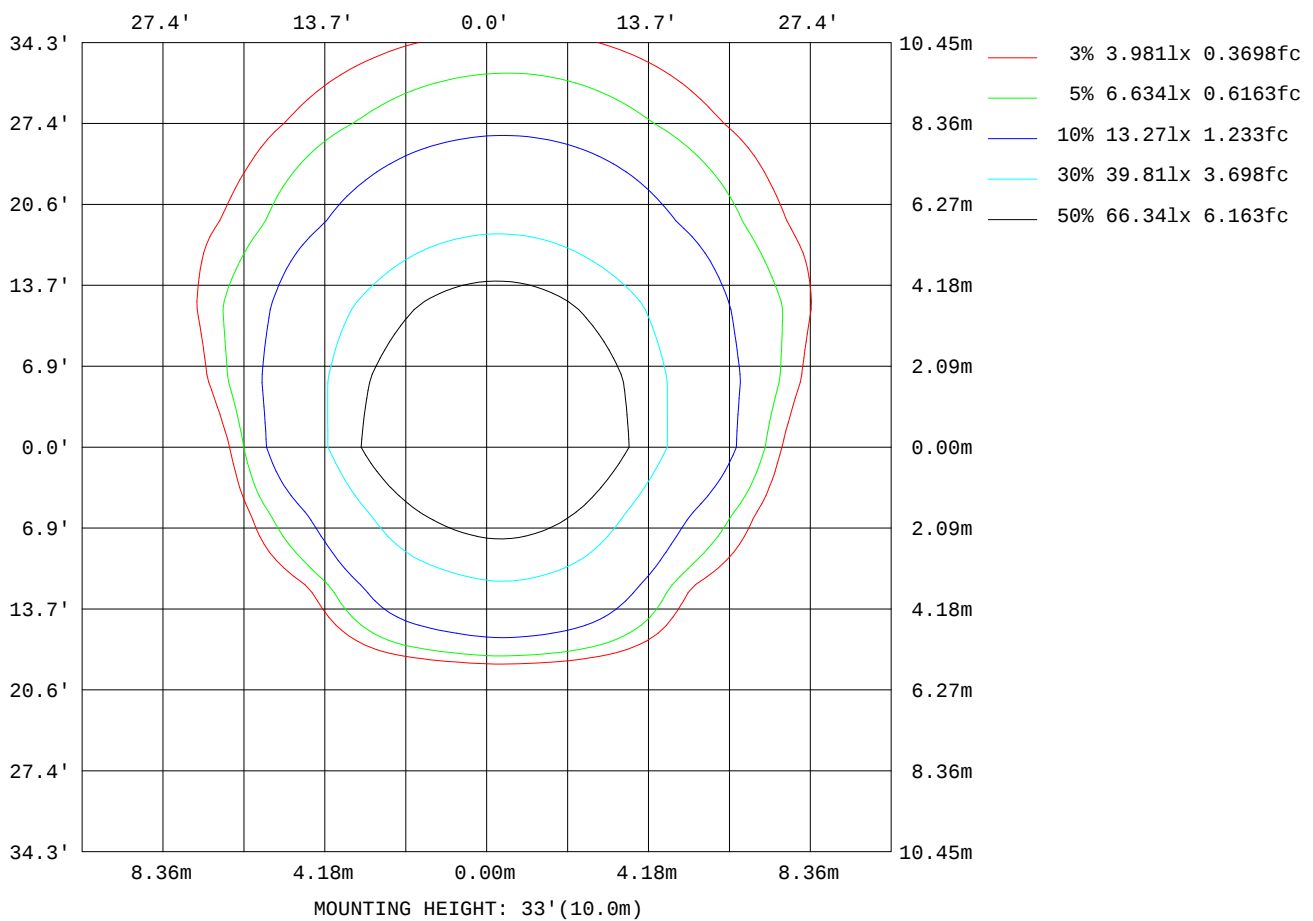

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:Y
Test Date:2025-04-18

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.1V I:0.0993A P:11.65W PF:0.9770 Lamp Flux:235x1 lm		
NAME: 490285 TEMPEST	TYPE:490285 TEMPEST	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:


AvgL	cd/m2
L_0~180(65)av	125
L_0~180(75)av	91
L_0~180(85)av	37
L_90~270(65)av	1196
L_90~270(75)av	396
L_90~270(85)av	0
L_45(65)av	277
L_45(75)av	208
L_45(85)av	0

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:Y
Test Date:2025-04-18

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

Planar Illuminance Curve

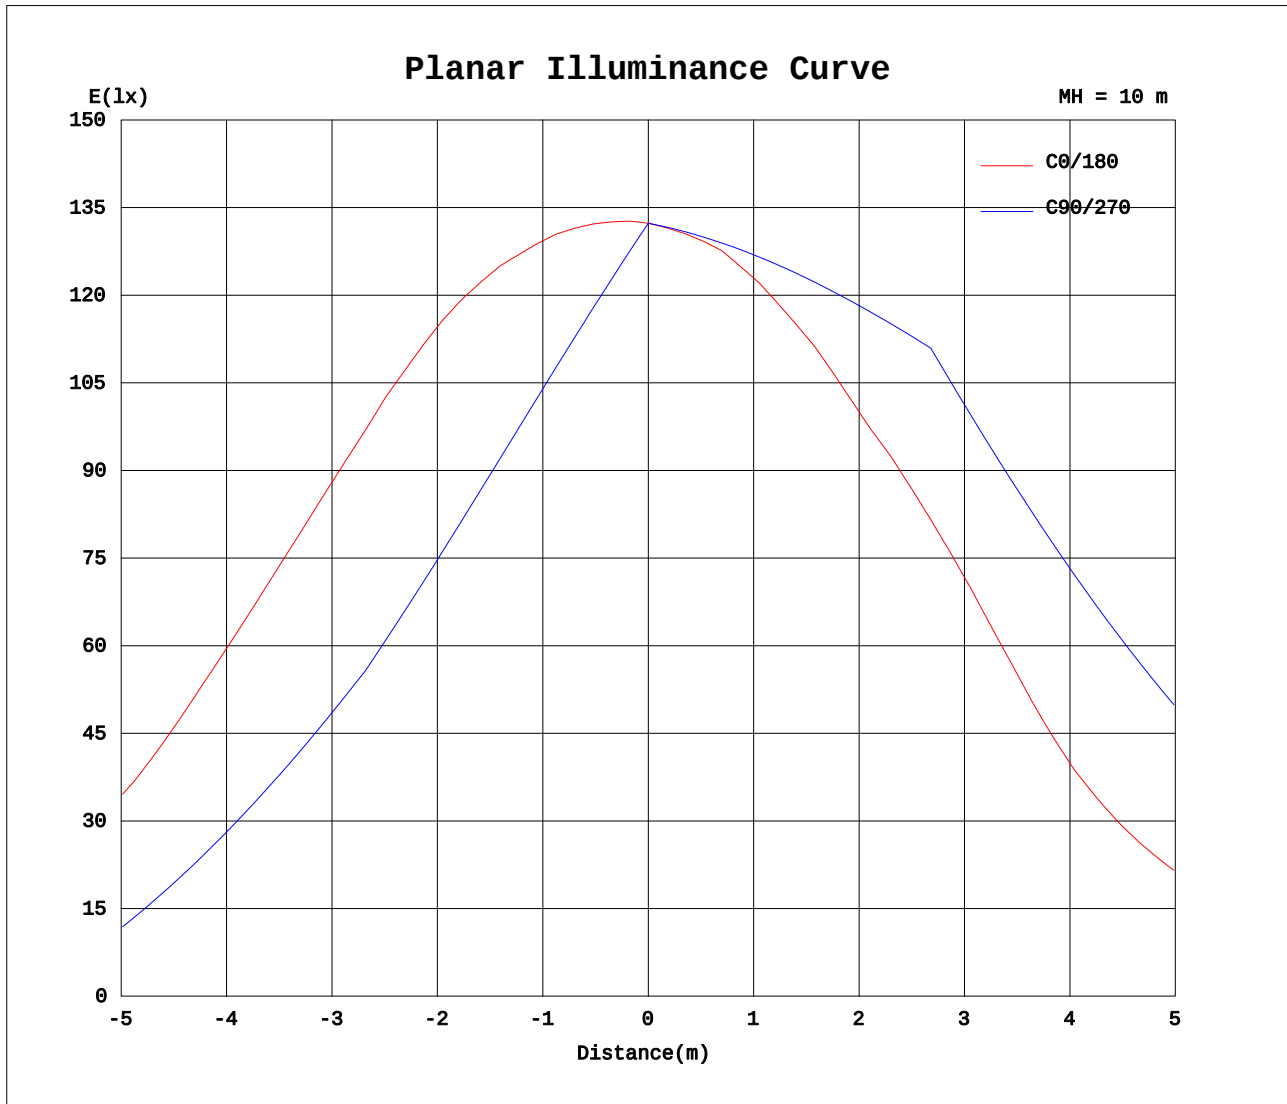

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: Y
Test Date: 2025-04-18

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.291
Humidity: 65.0%
Test Distance: 8.750m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.1V I:0.0993A P:11.65W PF:0.9770 Lamp Flux:235x1 lm		
NAME: 490285 TEMPEST	TYPE:490285 TEMPEST	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

Table- -1

UNIT: $\times 10 \text{cd}$ [illegible]

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: Y
Test Date: 2025-04-18

```

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

```

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.1V I:0.0993A P:11.65W PF:0.9770 Lamp Flux:235x1 lm		
NAME: 490285 TEMPEST	TYPE:490285 TEMPEST	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

Table - -2

UNIT: $\times 10 \text{cd}$ [illegible]

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: Y
Test Date: 2025-04-18

```

Range: 0 - 90DEG
Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

```

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.1V I:0.0993A P:11.65W PF:0.9770 Lamp Flux:235x1 lm		
NAME: 490285 TEMPEST	TYPE:490285 TEMPEST	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

Table - - 3

UNIT: $\times 10 \text{cd}$ [illegible]

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: Y
Test Date: 2025-04-18

```

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

```

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.1V I:0.0993A P:11.65W PF:0.9770 Lamp Flux:235x1 lm		
NAME: 490285 TEMPEST	TYPE:490285 TEMPEST	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

Table - -4

UNIT: $\times 10 \text{cd}$ [illegible]

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: Y
Test Date: 2025-04-18

```

Range: 0 - 90DEG
Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:8.750m [K=1.0000]
Remarks:

```