

Type:

Model:

**PRESCOTT  
LED Uplight**

**ORDERING CODE:**  
490004

**SPECIFICATIONS**

**VOLTAGE:**  
12V AC/DC

**HOUSING:**  
Cast brass with removable 3" shroud. Optional 6" shroud available.

**FINISH:**  
Weathered brass. Custom powder coated colors available.

**LAMP TYPE:**  
12V MR16. LED recommended. 35W Halogen or 7W LED maximum.

**SOCKET/LAMP HOLDER:**  
One fixed ceramic bi-pin socket with stainless steel retaining springs.

**LENS:**  
Tempered glass.

**MOUNTING:**  
Threaded with 1/2" NPT. May be mounted into threaded hubs in junction boxes or mounting accessories. Heavy-duty composite stake included.

**WIRING:**  
Pre-wired with a five-foot pigtail of 18/2 cable.


**WARRANTY:**  
Lifetime warranty



Opt. 6" extended shroud  
3W & 6W  
#490260

The Prescott uplight has a removable shroud to control glare (optional 6" shroud available). Easily adjustable knuckle to achieve the optimal effect. Numerous mounting options available. A very wide range of MR16 lamp intensities, beam spreads, and hues are available to maximize your creative expression.

**DIMENSIONS:**

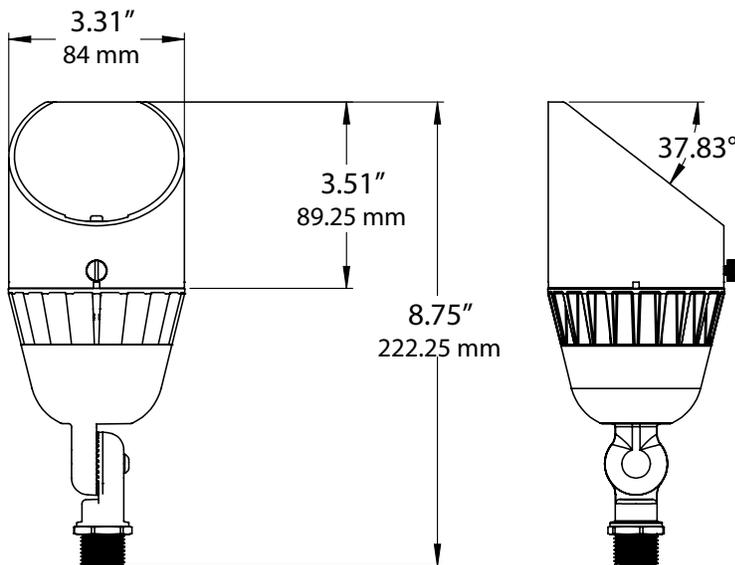

## LED LAMP SPECIFICATIONS

### LAMP TYPE:

12V Dauer MR16 lamp with 5-year warranty, dimmable, and suitable for enclosed luminaires.

### OPTICS:

Integral optics providing available beam spreads from 15° to 60°.

### COLOR TEMPERATURES:

Color temperature options provide the following qualities: 2700K or 3000K.



## FIXTURE ORDERING INFORMATION

To order a lamped fixture with mounting options, select the appropriate choice from each column as in the following example:

EXAMPLE: 490004-4W-25-2700K-MS-R2

FIXTURE	LAMP			MOUNTING	RISER
	WATTAGE	BEAM SPREAD	COLOR TEMP.		
490004	2W	25° / 40° / 60°	2700K / 3000K	<b>MS</b> Composite stake (incl.) 490034 <b>M3</b> Trident Heavy-Duty 3-Prong Stake 490036 <b>PM</b> Round pier mount 490057 <b>MR</b> Round tapered 3-hole surface mount 490048 <b>MP</b> PVC/Brass post stake 490037 <b>GM</b> Brass gutter mount 490047 <b>RMP</b> Round Brass Electrical Mounting Plate - 490043 <b>REP</b> Rectangular Brass Electrical Mounting Plate - 490044	<b>R2</b> 2" brass riser 490038 <b>R3</b> 3" brass riser 490039 <b>R6</b> 6" brass riser 490031 <b>R12</b> 12" brass riser 490032 <b>R24</b> 24" brass riser 490033
	3W	25° / 40° / 60°	2700K / 3000K		
	4W	25° / 40° / 60°	2700K / 3000K		
	5W	15° / 25° / 40° / 60°	2700K / 3000K		
	6W	25° / 40° / 60°	2700K / 3000K		
	7W	15° / 30° / 45° / 60°	2700K / 3000K		