

Type:

Model:

**PRESCOTT
LED Uplight**

ORDERING CODE:
490004

SPECIFICATIONS

VOLTAGE:
12V AC/DC

HOUSING:
Cast brass with removable 3" shroud. Optional 6" shroud available.

FINISH:
Weathered brass. Custom powder coated colors available.

LAMP TYPE:
12V MR16. LED recommended. 35W Halogen or 7W LED maximum.

SOCKET/LAMP HOLDER:
One fixed ceramic bi-pin socket with stainless steel retaining springs.

LENS:
Tempered glass.

MOUNTING:
Threaded with 1/2" NPT. May be mounted into threaded hubs in junction boxes or mounting accessories. Heavy-duty composite stake included.

WIRING:
Pre-wired with a five-foot pigtail of 18/2 cable.

WARRANTY:
Lifetime warranty





Opt. 6" extended shroud
3W & 6W
#490260



The Prescott uplight has a removable shroud to control glare (optional 6" shroud available). Easily adjustable knuckle to achieve the optimal effect. Numerous mounting options available. A very wide range of MR16 lamp intensities, beam spreads, and hues are available to maximize your creative expression.

DIMENSIONS:

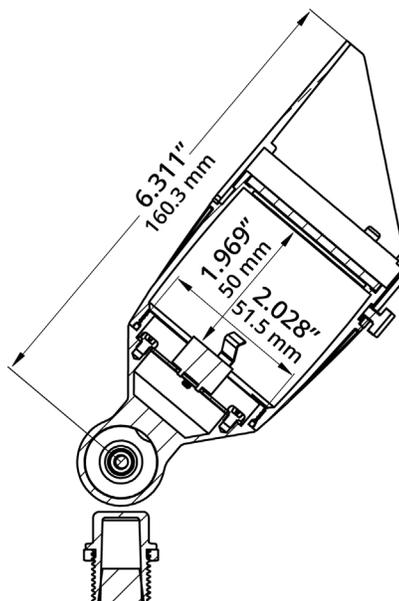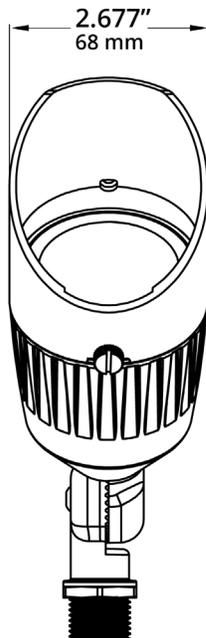

LED LAMP SPECIFICATIONS

LAMP TYPE:

12V Dauer MR16 lamp with 5-year warranty, dimmable, and suitable for enclosed luminaires.

OPTICS:

Integral optics providing available beam spreads from 15° to 60°.

COLOR TEMPERATURES:

Color temperature options provide the following qualities: 2700K or 3000K.

FIXTURE ORDERING INFORMATION

To order a lamped fixture with mounting options, select the appropriate choice from each column as in the following example:

EXAMPLE: 490004-4W-25-2700K-MS-R2



FIXTURE	LAMP			MOUNTING	RISER
	WATTAGE	BEAM SPREAD	COLOR TEMP.		
490004	2W	25° / 40° / 60°	2700K / 3000K	MS Composite stake (incl.) 490034 M3 Trident Heavy-Duty 3-Prong Stake 490036 PM Round pier mount 490057 MR Round tapered 3-hole surface mount 490048 MP PVC/Brass post stake 490037 GM Brass gutter mount 490047 RMP Round Brass Electrical Mounting Plate - 490043 REP Rectangular Brass Electrical Mounting Plate - 490044	R2 2" brass riser 490038 R3 3" brass riser 490039 R6 6" brass riser 490031 R12 12" brass riser 490032 R24 24" brass riser 490033
	3W	25° / 40° / 60°	2700K / 3000K		
	4W	25° / 40° / 60°	2700K / 3000K		
	5W	15° / 25° / 40° / 60°	2700K / 3000K		
	6W	25° / 40° / 60°	2700K / 3000K		
	7W	15° / 30° / 45° / 60°	2700K / 3000K		