

Type:

Model:

2W Aluminum Integrated Mini Flood

SPECIFICATIONS

VOLTAGE:
12 volts AC/DC.

HOUSING:
Cast Aluminum.

FINISH:
Architectural Bronze. Custom powder coated colors available.

MOUNTING:
Threaded with 1/2" NPT. Heavy-duty composite stake included. May be mounted into threaded hubs in junction boxes or mounting accessories



WIRING:
Pre-wired 5', 18/2 SPT1 lead.

WARRANTY:
Ten Years.



Ideal for applications such as landscape lighting, sign lighting, and building accent lighting. 150° (7H x 7V) beam.

DIMENSIONS:

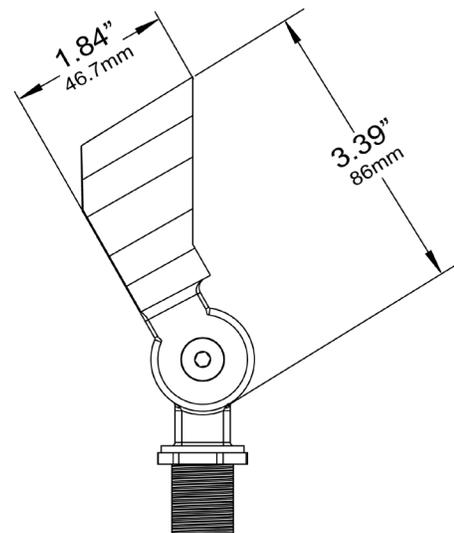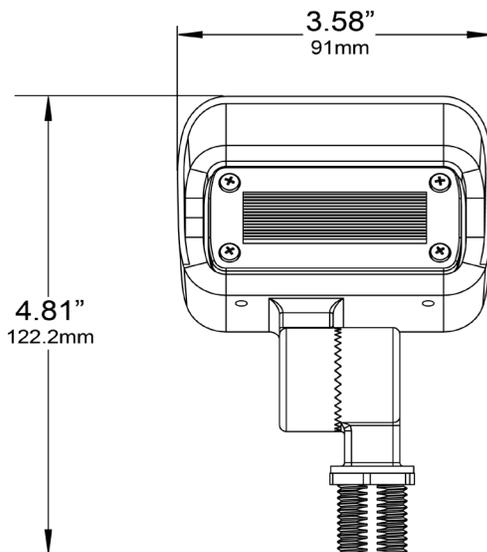

LED LAMP SPECIFICATIONS

LAMP TYPE:

Integrated LED.

OPTICS:

Integral optics providing available beam spreads 150° (7H x 7V) beam.

COLOR TEMPERATURES:

Color temperature options provide the following qualities: 2700K or 3000K.

FIXTURE ORDERING INFORMATION

To order a fixture, select the appropriate choice from each column as in the following example:

EXAMPLE: 490661-MS



Model	490661	490662	Mounting
Description	LED-MF-2W-2700K-12V	LED-MF-2W-3000K-12V	MS Composite stake (incl.) 490034 M3 Trident Heavy-Duty 3-Prong Stake 490036 PM Round pier mount 490057 MR Round tapered 3-hole surface mount 490048 MP PVC/Brass post stake 490037 GM Brass gutter mount 490047
Wattage	2W	2W	
Lumens	159.12 lm	180 lm	
Efficacy	76.5 lm/W	85 lm/W	
Volt Amps	3.34 VA	3.39 VA	
Color Temperature	2700K	3000K	
CRI	80	80	