



FEATURES & SPECIFICATIONS

CONSTRUCTION

- Housing: ADC12 Aluminum Die Casting
- Lens: Polycarbonate
- Easy to install and operate

ELECTRICAL

- High efficacy up to 130lm/W
- AC120-277V, 0-10V dimming
- CCT & Wattage Selectable
- Surge Protection: L/N2KV
- Waterproof: IP65 rated

APPLICATIONS

- Security lighting, entryways, stairwells, hallways, outdoor commercial & outdoor residential

INSTALLATION

- Photocell dusk to dawn function available

WARRANTY

- 5 years warranty

SPECS AT A GLANCE*


Configuration	LD-WP10-30W-PCP-3CCT
CCT (K)	3000K/4000K/5000K Tunable
Wattage (W)	30W/20W/15W wattage adjustable
Lumens (lm)	max.3900lm
Efficacy (LPW)	Up to 130lm/w
Photocell	Dusk to Dawn function available
CRI	>80
Input Voltage	AC120-277V
Operating Temp	-20°C-45°C
Certifications	ETL&DLC 5.1 Premium
Warranty	5-year limited warranty

*Nominal Wattage (Switchable)


ORDERING INFORMATION

Brand	Wattage	Photocell	3CCT
LD-WP10 Series	15W 20W 30W	P=Photocell	3000K/4000K/5000K


DETAIL

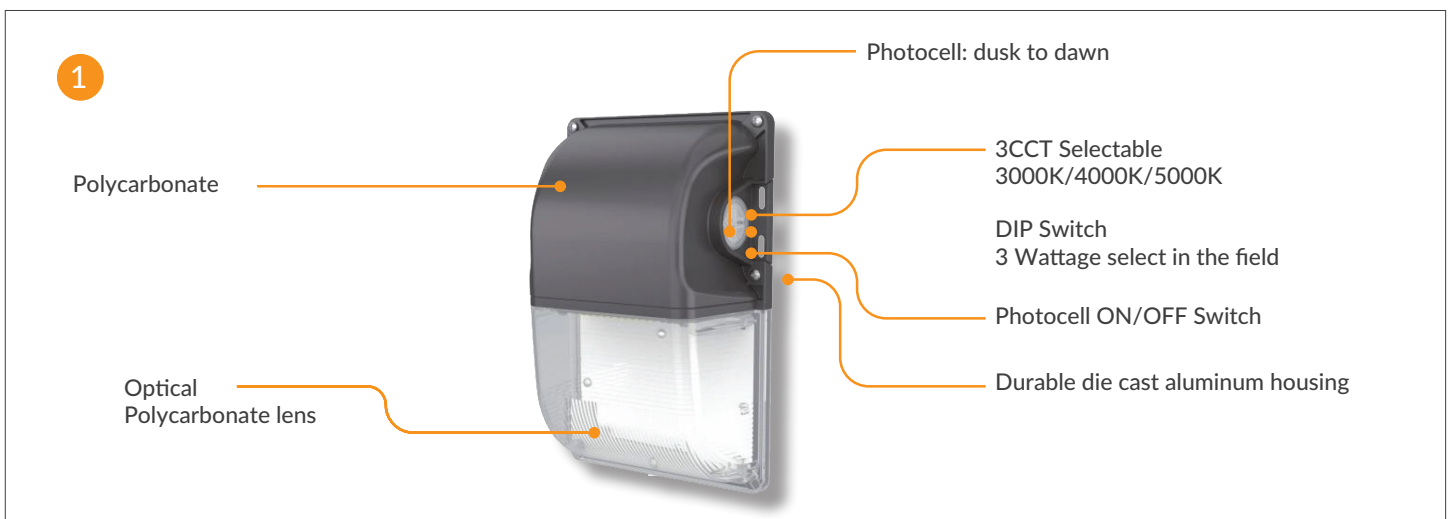

MULTIPLE EMERGENCY SOLUTIONS

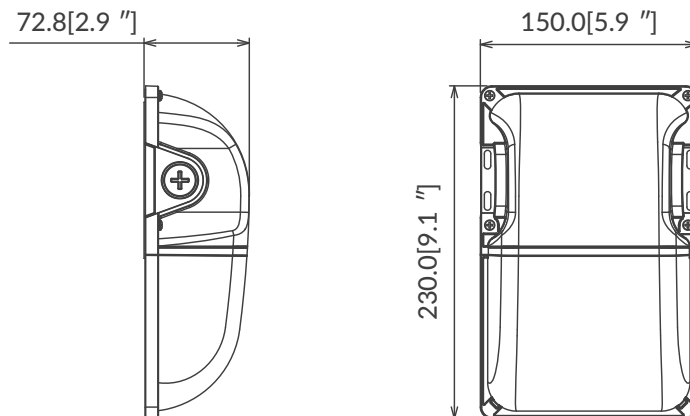

PHOTOMETRICS

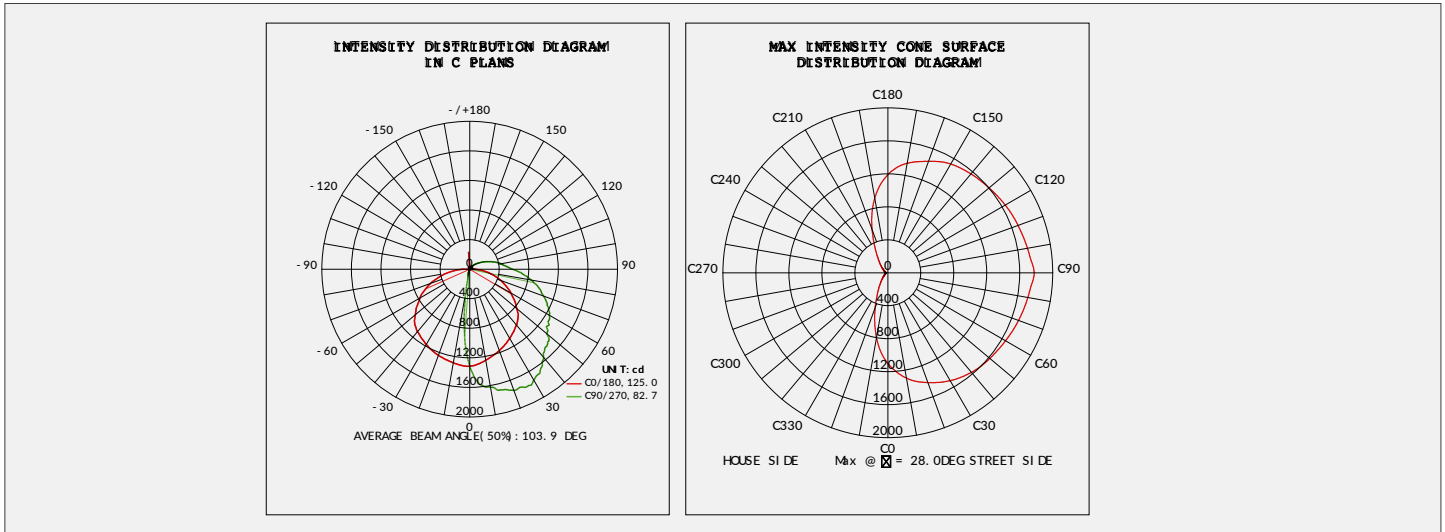

PACKING/WEIGHT

Part NO.	Outer Carton Size	Qty/Carton(pcs)	Net weight(lbs)	Gross weight(lbs)
15W/30W	20.1 x 13.8 x11.8inches	12	17.9 lbs	144pcs