

Type:

Model:

LED Mini Flood Light

SPECIFICATIONS

VOLTAGE:

120 to 277V 50/60Hz (12V models also available)

HOUSING:

Sealed cast aluminum. Shroud must be purchased separately.

FINISH:

Architectural bronze. Custom powder coated colors available.

MOUNTING:

Threaded with 1/2" NPT. May be mounted into threaded hubs in junction boxes.

WIRING:

Pre-wired five-foot 18/2 SPT1 lead.

WARRANTY:

Ten Years.



With optional 2" shroud.




With optional 4" shroud.



Ideal for applications such as landscape lighting, moon lighting, architectural wall washing and sign lighting. 10kV/10kA surge protection. 150° (7H x 7V) beam. Optional shroud available. Shrouds must be ordered separately.

DIMENSIONS:

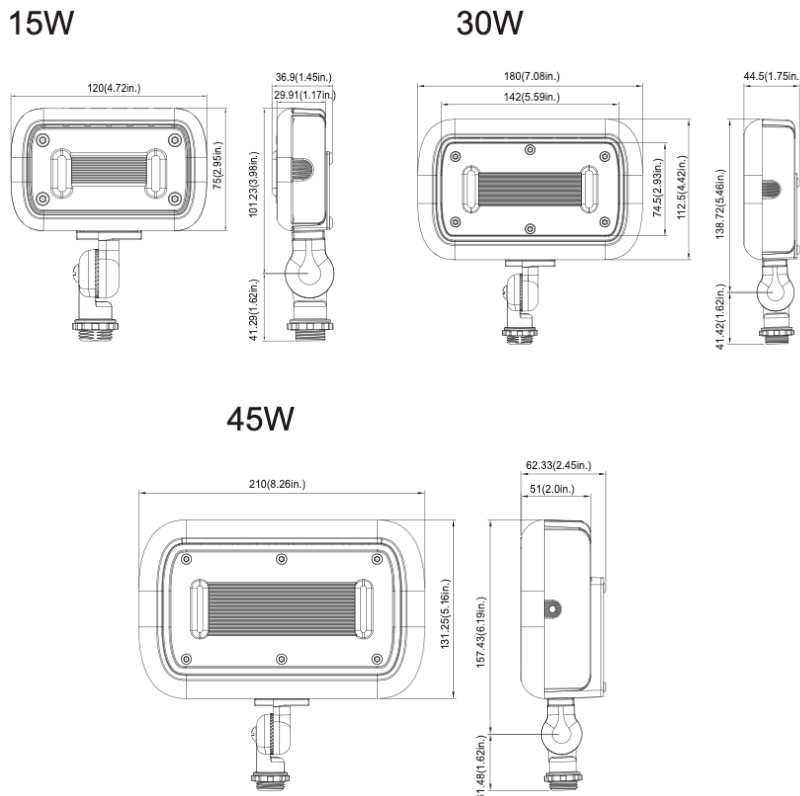

LED LAMP SPECIFICATIONS

LAMP TYPE:

Integrated LED.

OPTICS:

Integral optics providing available beam spreads 150° (7H x 7V) beam.

COLOR TEMPERATURES:

Color temperature options provide the following qualities: 2700K, 3000K, 4000K or 5000K.


FIXTURE ORDERING INFORMATION

To order a fixture, select the appropriate choice from each column as in the following example:


EXAMPLE: 490693




Model	490693	490673	490695	490674	490696	490697	490675	Mounting
Description	LED-MF-15W-3000K-120/277	LED-MF-15W-5000K-120/277	LED-MF-30W-3000K-120/277	LED-MF-30W-5000K-120/277	LED-MF-45W-2700K-120/277	LED-MF-45W-3000K-120/277	LED-MF-45W-5000K-120/277	MS Composite stake (incl.) 490034
Wattage	15W	15W	30W	30W	45W	45W	45W	ATM Aluminum Tapered Surface Mount - 490187
Lumens	1290 lm	1504 lm	2910 lm	3159 lm	4545 lm	4725 lm	5580 lm	AGM Aluminum Gutter Mount - 490188
Efficacy	86 lm/W	100.29 lm/W	97 lm/W	105.29 lm/W	101 lm/W	105 lm/W	123.96 lm/W	AR6 Aluminum 6-In Riser - 490181
Volt Amps	14.86 VA	15.05 VA	29.11 VA	28.70 VA	45.68 VA	44.84 VA	45.19 VA	AR12 Aluminum 12-In Gutter Mount - 490182
Color Temperature	3000K	5000K	3000K	5000K	2700K	3000K	5000K	AR24 Aluminum 24-In Gutter Mount - 490183
CRI	70	70	70	70	70	70	70	
Equivalent	50W MH	50W MH	100W MH	100W MH	150W MH	150W MH	150W MH	

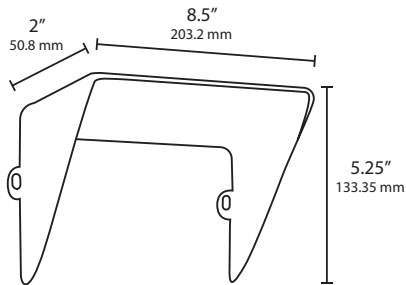

490676 2" Large Shroud

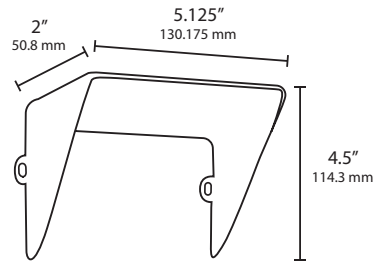


490672 2" Medium Shroud

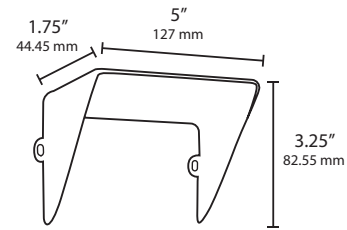


490667 2" Small Shroud




With optional 2" shroud.

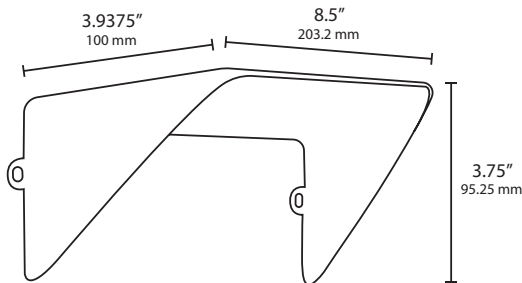

490700 4" Large Shroud

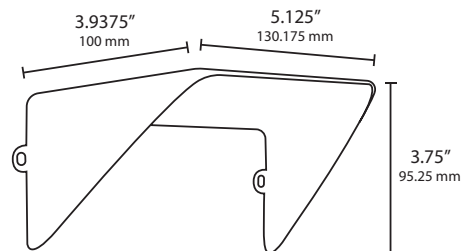

490699 4" Medium Shroud

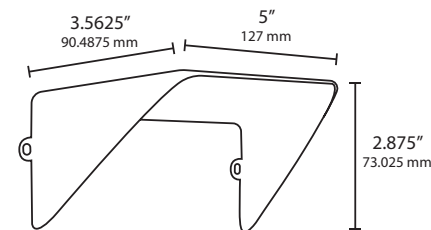

490698 4" Small Shroud



With optional 4" shroud.