

Type:

Model:

## ZEN Wildlife Safe LED Bi-Pin Path Light

**ORDERING CODE:**

490020 (clear lens) or 490021 (frosted lens)

**SPECIFICATIONS**

**HOUSING:**

Cast brass.

**FINISH:**

Weathered brass. Custom powder coated colors available.

**LENS:**

Polycarbonate

**STEMS:**

10" (Model 490025), 16" (Model 490023) and 18" (Model 490026) stems are sold separately.

**SOCKET/LAMP HOLDER:**

One fixed ceramic bi-pin socket in stem accepts bi-pin lamps with G4 or GY6.35 bases.

**LAMP TYPE:**

12V bi-pin. LED recommended. Halogen 35W maximum or 6W LED maximum.

**MOUNTING:**

1/2" NPT. Heavy-duty composite stake included with stem. May be mounted into threaded hubs in junction boxes or other mounting accessories.

**WIRING:**

Pre-wired with 5' pigtail of 18/2 cable.

**WARRANTY:**

Lifetime.

**ARCHITECTURAL COLORS:**

|                            |   |
|----------------------------|---|
| <b>FINE TEXTURE SILVER</b> |  |
| <b>FINE TEXTURE WHITE</b>  |  |
| <b>FINE TEXTURE BLACK</b>  |  |

490020-S (clear lens)  
490021-S (frosted lens)


490020-WH (clear lens)  
490021-WH (frosted lens)

490020-BLK (clear lens)  
490021-BLK (frosted lens)



The Zen path light features a 6.3-inch-diameter cast brass hat. Its underside is a powder-coated reflective white surface. Impact-resistant clear or frosted lens options. Approved as sea-turtle and wildlife-safe by the Florida Fish and Wildlife Conservation Commission and the U.S. Fish and Wildlife Service when used with a wildlife-safe Dauer LED lamp.

**DIMENSIONS:**

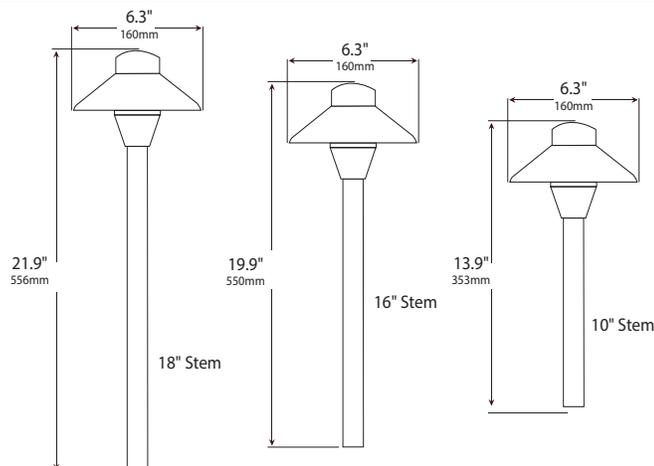

LED LAMP SPECIFICATIONS

**LAMP TYPE:**

Dauer amber LED bi-pin with 5-year warranty. 1.5W or 3W options

**COLOR TEMPERATURES:**

Wildlife-approved amber.

*These fixtures are only deemed wildlife approved if they utilize a wildlife-approved amber bulb as per the chart below.*



**FIXTURE ORDERING INFORMATION**

To order a lamped fixture with mounting options, select the appropriate choice from each column as in the following example:

EXAMPLE: 490020-490025-487124-WL-MS

| FIXTURE   | STEM            | LAMP      |          |               |         |                 | MOUNTING   |
|---|-----------------|-----------|----------|---------------|---------|-----------------|--|
|   |                 | ORDER NO. | COLOR    | DESCRIPTION   | WATTAGE | NANOMETER RANGE |  |
| (clear lens)<br>490020<br>490020-S<br>490020-WH<br>490020-BLK   | 490025<br>(10") | 487124-WL | Amber-WL | LED Bi-pin G4 | 1.5W    | 585-595         | <b>MS</b> Composite stake (incl.) 490034<br><b>M3</b> Trident Heavy-Duty 3-Prong Stake 490036<br><b>PM</b> Round pier mount 490057<br><b>MR</b> Round tapered 3-hole surface mount 490048<br><b>MP</b> PVC/Brass post stake 490037 |
| (frosted lens)<br>490021<br>490021-S<br>490021-WH<br>490021-BLK | 490023<br>(16") |           |          |               |         |                 |  |
|   | 490026<br>(18") | 487125-WL | Amber-WL | LED Bi-pin G4 | 3W      | 585-595         |  |