

## SPECIFICATION SHEET

Type:

Model:

# ANTIGUA LED Bi-Pin Path Light Fixture

## **ORDERING CODE:**

490110 (Bronze) 490110-BLK (Fine-textured black)

#### **SPECIFICATIONS**

#### **HOUSING:**

Cast aluminum.

#### FINISH:

Offered in architectural bronze and fine-textured black colors. Custom powder-coated colors available.

## LENS:

Clear polycarbonate.

### **SOCKET/LAMP HOLDER:**

One fixed ceramic bi-pin socket in stem accepts bi-pin lamps with G4 or GY6.35 bases.

#### LAMP TYPE:

12V bi-pin. LED recommended. Halogen 35W maximum or 6W LED maximum.

#### **MOUNTING:**

1/2" NPT. Heavy-duty composite stake included with stem.

#### WIRING:

Pre-wired with 5' pigtail of 18/2 cable.


## **WARRANTY**:

Five years.



The wildlife safe Antigua path light features a 6" diameter cast aluminum hat. Its underside is a powder-coated reflective white surface.

## **DIMENSIONS:**

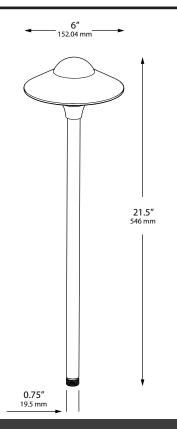



# SPECIFICATION SHEET Page 2 ANTIGUA LED Wildlife Safe Bi-Pin Path Light

## LED LAMP SPECIFICATIONS

## **LAMP TYPE:**

Dauer encapsulated bi-pin with 5-year warranty.

## **COLOR TEMPERATURES:**

Wildlife-approved, amber and red.

These fixtures are only deemed wildlife approved if they utilize a wildlife-approved amber or red bulb as per the chart below.



To order a lamped fixture with mounting options, select the appropriate choice from each column as in the following example:

EXAMPLE: 490110-490025-487123-WL-MS



| FIXTURE    | STEM            | LAMP      |          |                  |         |                 | MOUNTING   |
|------------|-----------------|-----------|----------|------------------|---------|-----------------|--|
| 490110     | 490025          | ORDER NO. | COLOR    | DESCRIPTION      | WATTAGE | NANOMETER RANGE | MS Composite stake (incl.) 490034                    |
| 490110-BLK | (10")           | 487123-WL | Amber-WL | Encap. Bi-pin G4 | 4w      | 585-595         | <b>M3</b> Trident Heavy-Duty 3-Prong Stake<br>490036 |
|            | 490023<br>(16") | 487120-WL | Red-WL   | Bi-pin G4        | 3w      | 610-645         | PM Round pier mount 490057                           |
|            | 490026<br>(18") |           |          |                  |         |                 | <b>MR</b> Round tapered 3-hole surface mount 490048  |
|            |                 |           |          |                  |         |                 | MP PVC/Brass post stake 490037                       |
|            |                 |           |          |                  |         |                 |  |