

Type:

Model:

ORSON Well Light

ORDERING CODE:
490180

Well Light Body & Gimbal with
Rock Guard Cover.

SPECIFICATIONS

HOUSING:

ABS Composite.

SOCKET/LAMP HOLDER:

Stainless steel adjustable
gimbal lamp holder.

LAMP TYPE:

12V PAR36/AR36 lamp. IP67 rated.
20W LED maximum rated.

MOUNTING:

Reversible. Installs in-grade.

WIRING:

5' 18/2 pigtail with fork terminals.

WARRANTY:

Lifetime.







The Orson is a PAR36 well light assembly which includes the shell, rotatable gimbal, and a brass grate rock guard cover to protect the lens and keep leaves and other impediments off the glass lens.
Assembled in the USA.

Condensation is a normal process with this well light as it is not hermetically sealed and exposed to elements. This will not harm nor impede the LED light source as it is engineered for this application.



E233194

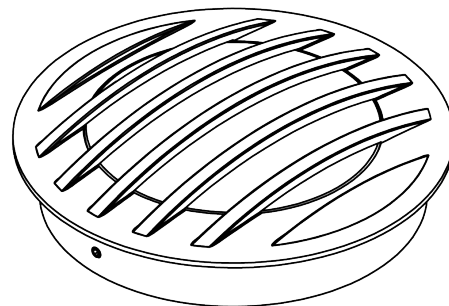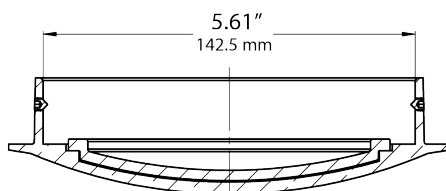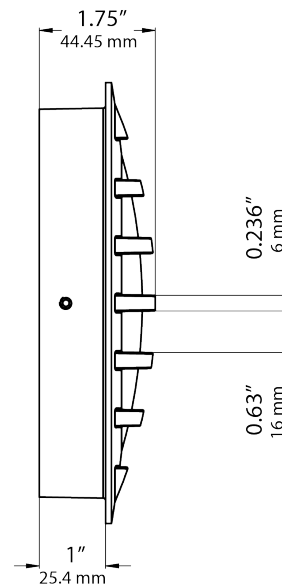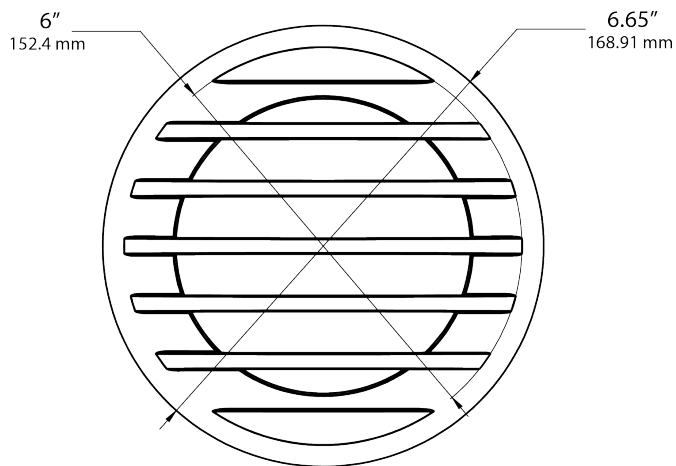

LED LAMP SPECIFICATIONS

LAMP TYPE:

12V PAR36/AR36 lamp. IP67 rated. 20W LED maximum rated.

OPTICS:

Integral optics providing available beam spreads of 38° and 60°.


COLOR TEMPERATURES:

Color temperature options provide the following qualities: 2700K or 3000K.

FIXTURE ORDERING INFORMATION

To order a lamped fixture with mounting options, select the appropriate choice from each column as in the following example:

EXAMPLE: 490180-487242

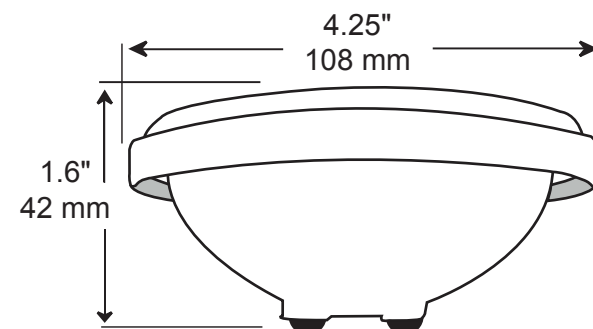

FIXTURE		LAMP			
490180	ORDER NO.	WATTAGE	BEAM SPREAD	LUMENS	EFFICACY
	487242 LED-AR36-4W-2700K-38°	4W	38°	320	80 lm/W
	487243 LED-AR36-4W-2700K-60°	4W	60°	320	80 lm/W
	487247 LED-AR36-4W-3000K-38°	4W	38°	320	80 lm/W
	487248 LED-AR36-4W-3000K-60°	4W	60°	320	80 lm/W
	487252 LED-AR36-6W-2700K-38°	6W	38°	480	80 lm/W
	487253 LED-AR36-6W-2700K-60°	6W	60°	480	80 lm/W
	487257 LED-AR36-6W-3000K-38°	6W	38°	480	80 lm/W
	487258 LED-AR36-6W-3000K-60°	6W	60°	480	80 lm/W
	487262 LED-AR36-10W-2700K-38°	10W	38°	800	80 lm/W
	487263 LED-AR36-10W-2700K-60°	10W	60°	800	80 lm/W
	487267 LED-AR36-10W-3000K-38°	10W	38°	800	80 lm/W
	487268 LED-AR36-10W-3000K-60°	10W	60°	800	80 lm/W
	487272 LED-AR36-13W-2700K-38°	13W	38°	1040	80 lm/W
	487273 LED-AR36-13W-2700K-60°	13W	60°	1040	80 lm/W
	487277 LED-AR36-13W-3000K-38°	13W	38°	1040	80 lm/W
	487278 LED-AR36-13W-3000K-60°	13W	60°	1040	80 lm/W
	487287 LED-AR36-17W-3000K-38°	17W	38°	1360	80 lm/W
	487288 LED-AR36-17W-3000K-60°	17W	60°	1360	80 lm/W